



BTH - 5



Φ12.0 x 9.5(h) mm

ORDERING CODE: B T H - 5

① ② ③

① Magnetic Buzzer

② Series Number


③ Rated Voltage

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	5
2	Operating Voltage (V)	4~7
4	Resonant Frequency (Hz)	2300±300
5	*Sound Output at 10cm (dB)	Min 85
6	*Current Consumption (mA)	Max 30
7	Operating Temperature (°C)	-20 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	2g
10	Housing Material	ppo
11	RoHS	YES
12	Packing Quantity	100pcs/box

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

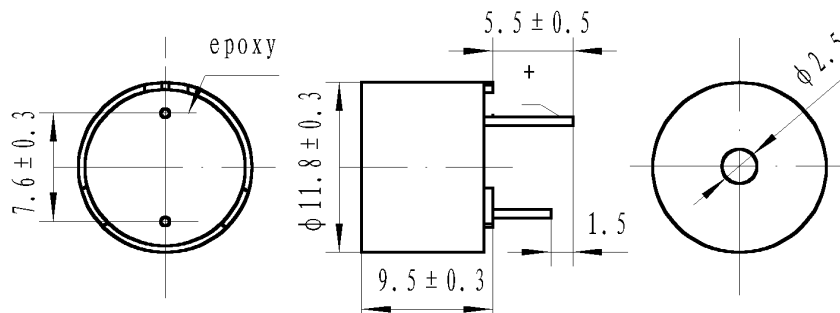



BTH - 12



Φ12.0 x 9.5(h) mm

ORDERING CODE: B T H - 12

① ② ③

① Magnetic Buzzer

② Series Number

③ Rated Voltage

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	12
2	Operating Voltage (V)	8~15
4	Resonant Frequency (Hz)	2300±300
5	*Sound Output at 10cm (dB)	Min 85
6	*Current Consumption (mA)	Max 30
7	Operating Temperature (°C)	-20 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	2g
10	Housing Material	ppo
11	RoHS	YES
12	Packing Quantity	100pcs/box

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

