



IPv6 quick facts

successor of IPv4 • 128-bit long addresses • that's 2⁹⁶ times the IPv4 address space • that's 2¹²⁸ or 3.4x10³⁸ or over 340 undecillion IPs overall • customer usually gets a /64 subnet, which yields 4 billion times the IPv4 address space • no need for network address translation (NAT) any more • no broadcasts any more • no ARP • stateless address configuration without DHCP • improved multicast • easy IP renumbering • minimum MTU size 1280 • mobile IPv6 • mandatory IPsec support • fixed IPv6 header size of 40 bytes • extension headers • jumbograms up to 4 GiB

IPv6 & ICMPv6 Headers

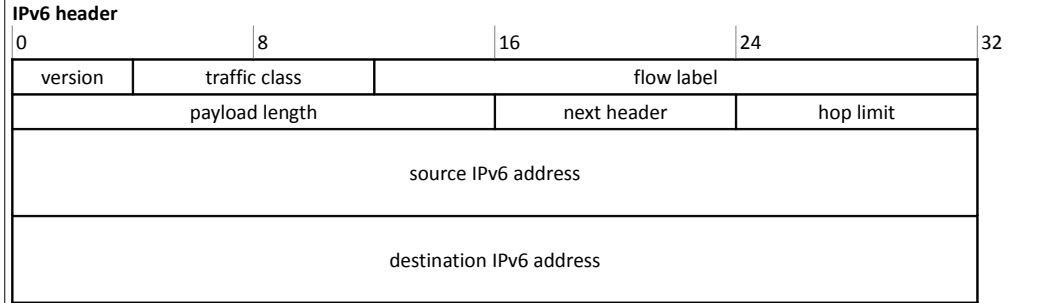


- Version** (4 bits): IP version. Always 6.
- Traffic class** (8 bits): Used for QoS. Like the TOS field in IPv4. [RFC 2474](#).
- Flow label** (20 bits): Used for packet labelling, End-to-end QoS. [RFC 6437](#).
- Payload length** (16 bits): Length of the payload following the header in bytes. Limits packet size to 64 KB.
- Next header** (8 bits): Code for the following extension header or UL protocol. Like protocol type field in IPv4.
- Hop limit** (8 bits): Number of hops until the packet gets discarded. TTL in IPv4.
- Source address** (128 bit): IPv6 source address.
- Destination address** (128 bits): IPv6 destination address.

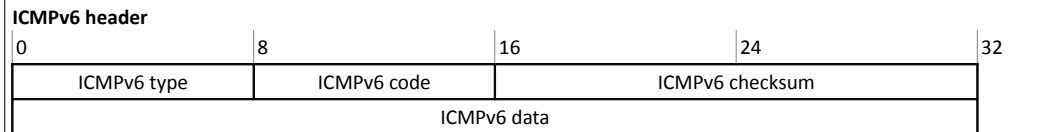


- ICMP type** (8 bits): Error messages have a 0 high-order-bit (types 0 to 127), info messages have a 1 high-order-bit (types 128 to 255).
- ICMP code** (8 bits): Further specifies the kind of message along with the type. F.i. type 1 code 4 is "destination port unreachable".
- ICMP checksum** (16 bits): Checksum to prevent data corruption.

IPv6 Extension Headers (RFC 2460 and it's updates)

Because of the IPv6 header simplification and fixed size of 40 bytes (compared to the IPv4 header with more fields and options and 20 to 60 bytes in size) additional IP options were moved from the main IPv6 header into additional headers. These extension headers (EH) will be appended to the main header as needed. The first 8 bit of each EH identify the next header (another EH or upper layer protocol) following. Only the hop-by-hop header must be examined by every node on the path and, if present, it must be the first header following the main IPv6 header. Every EH must only occur once, only the destination options EH may occur twice - before a routing EH and before the upper layer header.




IPv6 Addresses

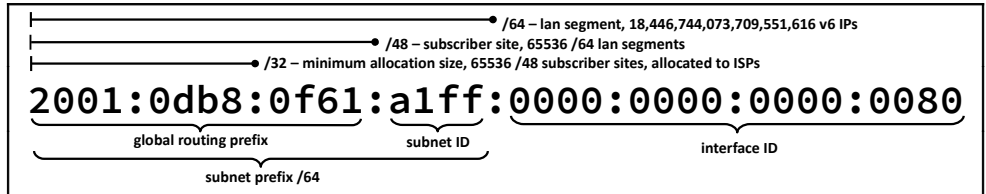

IPv6 addresses are written in hexadecimal and divided into eight pairs of two byte blocks, each containing four hex digits. Addresses can be shortened by skipping leading zeros in each block. This would shorten our example address to 2001:db8:f61:a1ff:0:0:0:80. Additionally, once per IPv6 IP, we can replace consecutive blocks of zeros with a double colon: 2001:db8:f61:a1ff::80.

The 64-bit interface ID can/should be in **modified EUI-64** format. A 48-bit MAC can be transformed to an 64-bit interface ID by inverting the 7th (universal) bit and inserting a ff and fe byte after the 3rd byte. So the MAC 00:03:ba:24:a9:c6 becomes 0203:baff:fe24:a9c6. See [RFC 4291](#) Appendix A and [RFC 4941](#).



IPv6 Address Scopes

::/128	unspecified address
::1/128	localhost
fe80::/10	link local scope
fec0::/10	site local scope, intended as RFC 1918 successor, deprecated in RFC 3879
fc00::/7	unique local unicast scope, RFC 4193, divided into:
fc00::/8	centrally assigned by unknown (see http://bit.ly/IETFFc00), routed within a site
fd00::/8	free for all, global ID must be generated randomly, routed within a site
ff00::/8	multicast scope, after the prefix ff there are 4 bits for flags (ORPT) and 4 bits for the scope
::/96	IPv4-compatible IPv6 address, example: ::192.168.1.2, deprecated with RFC 4291
::ffff:0:0/96	IPv4-mapped IPv6 address, example: ::ffff:192.168.2.1, see RFC 4038
2000::/3	global unicast scope, divided into:
2001::/16	/32 subnets assigned to providers, they assign /48, /56 or /64 to the customer
2001::/32	Global Teredo IPv6 Service Prefix.
2001:db8::/32	Reserved for use in documentation. See RFC 3849.
2001:678::/29	Provider Independent (PI) space and anycasting TLD nameservers (f.i. 2001:678:2::/48 for DENIC)
2002::/16	6to4 scope, 2002:c058:6301:: is the 6to4 public router anycast (deprecated with RFC 7526)
3ffe::/16	6Bone scope, returned to IANA with RFC 3701, you should not see these
64:ff9b::/96	prefix used for representing IPv4 addresses in the IPv6 address space, see RFC 6052

Well Known Multicast Addresses (T-Flag = 0)

ff0x::1	all nodes address (scopes 1 and 2)
ff0x::2	all routers address (scopes 1, 2 and 5)
ff05::1:3	all site-local DHCP servers
ff02::9	all link-local RIP routers
ff02::1:ff/104	solicited-node address, the 24 low-order bits are equal to the interfaces IP 24 low-order bits
ff02::1:2	all link-local DHCP relay agents and servers
ff0x::fb	Multicast Domain Name Service v6 (all scopes)
ff0x::101	Network Time Protocol (all scopes)

Multicast Scopes

1	Interface-local	5	Site-local
2	Link-local	8	Organization-Local
3	Admin-local	e	Global

← A "X" in the prefix is a place holder for the scope ↑

