

Date: 4-5-6/4/2008 Driver: M. SPINIELLO
 Event: C. ITALIANO Car: G4 RS
 Track: MESSINA Weight: 1700

SETUP SHEET




TRACK CONDITIONS

Surface: Smooth Med. Bumpy
 Size: Open Med. Tight
 Traction: High Med. Low

Track Temp/Air Temp: _____ / _____

Note: _____


FRONT SUSPENSION



Front Width: 198 mm

Anti-Roll Bar: 45 °

Diff. Fluid: 50000 wt
 One Way
 Solid Axle



Toe Angle: 1 °

Front Camber: L 2° R 2,5°

Front Ride Height: _____ mm

Front Droop: 3 mm

Caster: 2 mm

► SHOCK

Shock Length: 63 mm

Thread Length: 6,3 mm

Oil: 400 wt

Piston: 2 - 1/1,2 mm

Spring: MUGEN GRAY mm




► TIRE

Front Tire: ATS


Shore: L 40° R 40°

Diameter(Start): L/R 63/64 mm

Diameter(Finish): L/R 58/57 mm



REAR SUSPENSION



Rear Width: 200 mm

Anti-Roll Bar: 0

Diff. Fluid: 30000 wt
 Solid Axle

Toe Angle: -3,5

Rear Camber: L 4,5 R 5,5

Rear Ride Height: _____ mm

Rear Droop: 2 mm

► SHOCK

Shock Length: 63 mm

Thread Length: 5,1 mm

Oil: 400 wt

Piston: 2 - 1/1,2 mm

Spring: TM PURPLE mm



► TIRE

Front Tire: ATS


Shore: L 40° R 42

Diameter(Start): L/R 64 65,8

Diameter(Finish): L/R 58 change after 30.m



PULLEY




Front Side Pulley: STD

Rear Side Pulley: STD

Brake Pulley: STD

ENGINE



Gear Ratio: 1st 16 T/52 T

2nd 21 T/46 T

Clutch Set Type:

3 Shoe Push Type

Clutch Spring: _____ mm

Clutch weight: _____

Clutch Shoe: _____

Engine: NOVAROSSA

Plug: NOVA 7

Fuel: RUNNER TIME


Manifold: _____

Pipe: NOVA 2630

Pipe Length: _____ mm

Note: _____

WHEELBASE

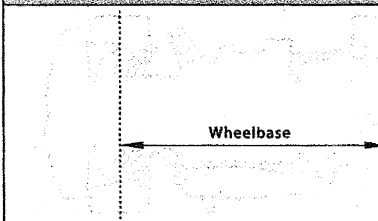


257 mm

258 mm

259 mm

260 mm

BODY



Body: STRATUS III

Radio: FUTABA

ST. Servo: SANWA RZ

TH Servo: SANWA RZ