

IAR Embedded Workbench® IDE

User Guide

COPYRIGHT NOTICE

© Copyright 1996–2008 IAR Systems. All rights reserved.

No part of this document may be reproduced without the prior written consent of IAR Systems. The software described in this document is furnished under a license and may only be used or copied in accordance with the terms of such a license.

DISCLAIMER

The information in this document is subject to change without notice and does not represent a commitment on any part of IAR Systems. While the information contained herein is assumed to be accurate, IAR Systems assumes no responsibility for any errors or omissions.

In no event shall IAR Systems, its employees, its contractors, or the authors of this document be liable for special, direct, indirect, or consequential damage, losses, costs, charges, claims, demands, claim for lost profits, fees, or expenses of any nature or kind.

TRADEMARKS

IAR Systems, IAR Embedded Workbench, C-SPY, visualSTATE, From Idea To Target, IAR KickStart Kit, IAR PowerPac, IAR YellowSuite, IAR Advanced Development Kit, IAR, and the IAR Systems logotype are trademarks or registered trademarks owned by IAR Systems AB. J-Link is a trademark licensed to IAR Systems AB.

Microsoft and Windows are registered trademarks of Microsoft Corporation.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated. CodeWright is a registered trademark of Starbase Corporation.

All other product names are trademarks or registered trademarks of their respective owners.

EDITION NOTICE

Seventh edition: March 2008

Part number: UEW-7

Internal reference: 5.2.0. ISUD.

Brief contents

Tables	xxiii
Figures	xxvii
Preface	xxxiii
Part 1. Product overview	1
Product introduction	3
Installed files	15
Part 2. Tutorials	23
Creating an application project	25
Debugging using the IAR C-SPY® Debugger	35
Mixing C and assembler modules	45
Using C++	49
Simulating an interrupt	53
Creating and using libraries	63
Part 3. Project management and building	67
The development environment	69
Managing projects	75
Building	85
Editing	93
Part 4. Debugging	103
The IAR C-SPY® Debugger	105

Executing your application	113
Working with variables and expressions	121
Using breakpoints	129
Monitoring memory and registers	137
Using the C-SPY® macro system	143
Analyzing your application	151
Part 5. IAR C-SPY® Simulator	157
Simulator-specific debugging	159
Simulating interrupts	177
Part 6. Reference information	189
IAR Embedded Workbench® IDE reference	191
C-SPY® Debugger reference	269
General options	303
Compiler options	309
Assembler options	323
Custom build options	329
Build actions options	331
Linker options	333
Library builder options	347
Debugger options	349
The IAR C-SPY Command Line Utility—cspybat	353
C-SPY® macros reference	361
Glossary	387

Index	401
-------------	-----

Contents

Tables	xxiii
Figures	xxvii
Preface	xxxiii
Who should read this guide	xxxiii
How to use this guide	xxxiii
What this guide contains	xxxiv
Other documentation	xxxvii
Document conventions	xxxvii
 Part I. Product overview	1
Product introduction	3
The IAR Embedded Workbench IDE	3
An extensible and modular environment	4
Features	4
Documentation	5
IAR C-SPY Debugger	5
General C-SPY Debugger features	6
C-SPY plugin modules	8
RTOS awareness	9
IAR C-SPY Simulator	9
Documentation	9
IAR C/C++ Compiler	9
Features	10
Runtime environment	11
Documentation	11
IAR Assembler	11
Features	11
Documentation	11

IAR XLINK Linker	11
Features	12
Documentation	12
IAR XAR Library Builder and IAR XLIB Librarian	12
Features	13
Documentation	13
Installed files	15
Directory structure	15
Root directory	15
The <i>CPUNAME</i> directory	15
The common directory	17
The metadata directory	18
File types	18
files with non-default filename extensions	20
Documentation	21
The user and reference guides	21
Online help	22
IAR on the web	22
 Part 2. Tutorials	 23
Creating an application project	25
Setting up a new project	25
Creating a Workspace window	25
Creating the new project	26
Adding files to the project	28
Setting project options	29
Compiling and linking the application	30
Compiling the source files	30
Viewing the list file	31
Linking the application	33
Viewing the map file	34

Debugging using the IAR C-SPY® Debugger	35
Debugging the application	35
Starting the debugger	35
Organizing the windows	35
Inspecting source statements	36
Inspecting variables	38
Setting and monitoring breakpoints	40
Monitoring registers	42
Monitoring memory	42
Viewing terminal I/O	43
Reaching program exit	43
Mixing C and assembler modules	45
Examining the calling convention	45
Adding an assembler module to the project	46
Setting up the project	46
Using C++	49
Creating a C++ application	49
Compiling and linking the C++ application	49
Setting a breakpoint and executing to it	50
Printing the Fibonacci numbers	52
Simulating an interrupt	53
Adding an interrupt handler	53
The application—a brief description	53
Writing an interrupt handler	54
Setting up the project	54
Setting up the simulation environment	54
Defining a C-SPY setup macro file	55
Specifying C-SPY options	56
Building the project	57
Starting the simulator	57
Specifying a simulated interrupt	58
Setting an immediate breakpoint	59

Simulating the interrupt	60
Executing the application	60
Using macros for interrupts and breakpoints	61
Creating and using libraries	63
Using libraries	63
Creating a new project	64
Creating a library project	64
Using the library in your application project	65
 Part 3. Project management and building	67
The development environment	69
The IAR Embedded Workbench IDE	69
The tool chain	69
Running the IAR Embedded Workbench IDE	70
Exiting	71
Customizing the environment	71
Organizing the windows on the screen	71
Customizing the IDE	72
Invoking external tools	73
Managing projects	75
The project model	75
How projects are organized	75
Creating and managing workspaces	78
Navigating project files	79
Viewing the workspace	80
Displaying browse information	81
Source code control	82
Interacting with source code control systems	82
Building	85
Building your application	85
Setting options	85

Building a project	87
Building multiple configurations in a batch	87
Using pre- and post-build actions	87
Correcting errors found during build	88
Building from the command line	89
Extending the tool chain	89
Tools that can be added to the tool chain	90
Adding an external tool	90
Editing	93
Using the IAR Embedded Workbench editor	93
Editing a file	93
Using and adding code templates	97
Navigating in and between files	99
Searching	99
Customizing the editor environment	100
Using an external editor	100
 Part 4. Debugging	 103
The IAR C-SPY® Debugger	105
Debugger concepts	105
IAR C-SPY Debugger and target systems	105
Debugger	106
Target system	106
User application	106
IAR C-SPY Debugger systems	106
ROM-monitor program	107
Third-party debuggers	107
The C-SPY environment	107
An integrated environment	107
Setting up the IAR C-SPY Debugger	108
Choosing a debug driver	108
Executing from reset	109

Using a setup macro file	109
Selecting a device description file	110
Loading plugin modules	110
Starting the IAR C-SPY Debugger	111
Redirecting debugger output to a file	111
Executing your application	113
Source and disassembly mode debugging	113
Executing	114
Step	114
Go	116
Run to Cursor	116
Highlighting	116
Using breakpoints to stop	117
Using the Break button to stop	117
Stop at program exit	117
Call stack information	117
Terminal input and output	118
Working with variables and expressions	121
C-SPY expressions	121
C symbols	121
Assembler symbols	122
Macro functions	122
Macro variables	122
Limitations on variable information	123
Effects of optimizations	123
Viewing variables and expressions	124
Working with the windows	124
Using the trace system	125
Viewing assembler variables	126
Using breakpoints	129
The breakpoint system	129

Defining breakpoints	129
Toggling a simple code breakpoint	130
Setting a breakpoint in the Memory window	131
Defining breakpoints using the dialog box	131
Defining breakpoints using system macros	132
Viewing all breakpoints	133
Using the Breakpoint Usage dialog box	133
Monitoring memory and registers	137
Memory addressing	137
Windows for monitoring memory and registers	137
Using the Memory window	138
Using the Stack window	138
Working with registers	140
Using the C-SPY® macro system	143
The macro system	143
The macro language	144
The macro file	144
Setup macro functions	145
Using C-SPY macros	145
Using the Macro Configuration dialog box	146
Registering and executing using setup macros and setup files	147
Executing macros using Quick Watch	148
Executing a macro by connecting it to a breakpoint	149
Analyzing your application	151
Function-level profiling	151
Using the profiler	151
Code coverage	153
Using Code Coverage	153

Part 5. IAR C-SPY® Simulator	157
Simulator-specific debugging	159
The IAR C-SPY Simulator introduction	159
Features	159
Selecting the simulator driver	159
Simulator-specific menus	160
Simulator menu	160
Using the trace system in the simulator	160
Trace window	161
Trace toolbar	162
Function Trace window	162
Trace Expressions window	163
Find In Trace window	164
Find in Trace dialog box	164
Memory access checking	166
Memory Access setup dialog box	166
Edit Memory Access dialog box	169
Using breakpoints in the simulator	170
Data breakpoints	170
Immediate breakpoints	173
Breakpoint Usage dialog box	175
Simulating interrupts	177
The C-SPY interrupt simulation system	177
Interrupt characteristics	178
Interrupt simulation states	179
Using the interrupt simulation system	179
Target-adapting the interrupt simulation system	180
Interrupt Setup dialog box	180
Edit Interrupt dialog box	181
Forced interrupt window	183
C-SPY system macros for interrupts	184
Interrupt Log window	185

Simulating a simple interrupt	186
Part 6. Reference information	189
IAR Embedded Workbench® IDE reference	191
Windows	191
IAR Embedded Workbench IDE window	192
Workspace window	194
Editor window	202
Source Browser window	207
Breakpoints window	209
Build window	215
Find in Files window	215
Tool Output window	216
Debug Log window	217
Menus	218
File menu	218
Edit menu	221
View menu	229
Project menu	231
Tools menu	240
Common fonts options	241
Key Bindings options	242
Language options	243
Editor options	244
Configure Auto Indent dialog box	246
External Editor options	247
Editor Setup Files options	249
Editor Colors and Fonts options	250
Messages options	251
Project options	253
Source Code Control options	254
Debugger options	255
Stack options	257

Register Filter options	259
Terminal I/O options	260
Configure Tools dialog box	261
Filename Extensions dialog box	263
Filename Extension Overrides dialog box	264
Edit Filename Extensions dialog box	264
Configure Viewers dialog box	265
Edit Viewer Extensions dialog box	265
Window menu	266
Help menu	267
Embedded Workbench Startup dialog box	267
C-SPY® Debugger reference	269
C-SPY windows	269
Editing in C-SPY windows	269
IAR C-SPY Debugger main window	270
Disassembly window	271
Memory window	273
Fill dialog box	276
Memory Save dialog box	277
Memory Restore dialog box	278
Symbolic Memory window	279
Register window	281
Watch window	281
Locals window	283
Auto window	284
Live Watch window	284
Quick Watch window	285
Statics window	285
Select Statics dialog box	287
Call Stack window	288
Terminal I/O window	289
Code Coverage window	290
Profiling window	292

Stack window	293
C-SPY menus	296
Debug menu	297
General options	303
Target	303
Output	303
Output file	304
Output directories	304
Library Configuration	305
Library	305
Library file	305
Configuration file	305
Library Options	306
Printf formatter	306
Scanf formatter	306
Stack/Heap	307
Compiler options	309
Multi-file compilation	309
Language	310
Language	310
Require prototypes	311
Language conformance	311
Plain 'char' is	311
Enable multibyte support	312
Enable IAR migration preprocessor extensions	312
Code	312
Optimizations	313
Optimizations	313
Output	314
Module type	315
Generate debug information	315
List	316
Output list file	316

Output assembler file	316
Preprocessor	317
Ignore standard include directories	317
Additional include directories	317
Preinclude file	318
Defined symbols	318
Preprocessor output to file	318
Diagnostics	318
Enable remarks	319
Suppress these diagnostics	319
Treat these as remarks	319
Treat these as warnings	320
Treat these as errors	320
Treat all warnings as errors	320
Extra Options	320
Use command line options	321
Assembler options	323
Language	323
User symbols are case sensitive	323
Enable multibyte support	323
Allow mnemonics in first column	323
Allow directives in first column	323
Macro quote characters	324
Output	324
Generate debug information	325
List	325
Preprocessor	325
Ignore standard include directories	325
Additional include directories	325
Defined symbols	326
Preprocessor output to file	326
Diagnostics	327

Extra Options	327
Use command line options	327
Custom build options	329
Custom Tool Configuration	329
Build actions options	331
Build Actions Configuration	331
Pre-build command line	331
Post-build command line	331
Linker options	333
Output	333
Output file	333
Format	334
Extra Output	336
#define	337
Define symbol	337
Diagnostics	338
Always generate output	338
Segment overlap warnings	338
No global type checking	338
Range checks	339
Warnings/Errors	339
List	340
Generate linker listing	340
Config	342
Linker command file	342
Command file configuration tool	342
Override default program entry	342
Search paths	343
Raw binary image	343
Processing	344
Fill unused code memory	344
The checksum calculation	345

Extra Options	346
Use command line options	346
Library builder options	347
Output	347
Debugger options	349
Setup	349
Driver	349
Run to	350
Setup macros	350
Device description file	350
Download	350
Extra Options	351
Use command line options	351
Plugins	351
The IAR C-SPY Command Line Utility—cspybat	353
Using C-SPY in batch mode	353
Invocation syntax	353
Output	354
Using an automatically generated batch file	354
IAR C-SPY command line options	355
Descriptions of C-SPY command line options	356
C-SPY® macros reference	361
The macro language	361
Macro functions	361
Predefined system macro functions	361
Macro variables	362
Macro statements	363
Formatted output	364
Setup macro functions summary	366
C-SPY system macros summary	367
Description of C-SPY system macros	368

Glossary	387
Index	401

Tables

1: Typographic conventions used in this guide	xxxvii
2: File types	18
3: Compiler options for project2	46
4: Interrupts dialog box	58
5: Breakpoints dialog box	59
6: General options for a library project	64
7: Command shells	74
8: iarbuild.exe command line options	89
9: C-SPY assembler symbols expressions	122
10: Handling name conflicts between hardware registers and assembler labels	122
11: Project options for enabling profiling	151
12: Project options for enabling code coverage	154
13: Description of Simulator menu commands	160
14: Trace window columns	161
15: Trace toolbar commands	162
16: Toolbar buttons in the Trace Expressions window	164
17: Function buttons in the Memory Access Setup dialog box	168
18: Example of costs for accessing memory entities	170
19: Memory Access types	172
20: Breakpoint conditions	172
21: Memory Access types	174
22: Characteristics of a forced interrupt	183
23: Description of the Interrupt Log window	185
24: Timer interrupt settings	187
25: IAR Embedded Workbench IDE menu bar	192
26: Workspace window context menu commands	196
27: Description of source code control commands	197
28: Description of source code control states	198
29: Description of commands on the editor window context menu	204
30: Editor keyboard commands for insertion point navigation	205
31: Editor keyboard commands for scrolling	206

32: Editor keyboard commands for selecting text	206
33: Information in Source Browser window	207
34: Source Browser window context menu commands	208
35: Breakpoints window context menu commands	210
36: Breakpoint conditions	212
37: Log breakpoint conditions	213
38: Location types	214
39: File menu commands	219
40: Edit menu commands	221
41: Find dialog box options	224
42: Replace dialog box options	225
43: Incremental Search function buttons	228
44: View menu commands	229
45: Project menu commands	231
46: Argument variables	233
47: Configurations for project dialog box options	234
48: New Configuration dialog box options	235
49: Description of Create New Project dialog box	236
50: Project option categories	236
51: Description of the Batch Build dialog box	238
52: Description of the Edit Batch Build dialog box	239
53: Tools menu commands	240
54: Project IDE options	253
55: Register Filter options	259
56: Configure Tools dialog box options	261
57: Command shells	263
58: Window menu commands	266
59: Editing in C-SPY windows	270
60: Disassembly window toolbar	272
61: Disassembly context menu commands	273
62: Memory window operations	274
63: Commands on the memory window context menu	275
64: Fill dialog box options	276
65: Memory fill operations	277

66: Symbolic Memory window toolbar	279
67: Symbolic memory window columns	279
68: Commands on the Symbolic Memory window context menu	280
69: Watch window context menu commands	282
70: Effects of display format setting on different types of expressions	283
71: Symbolic memory window columns	286
72: Statics window context menu commands	287
73: Profiling window columns	293
74: Stack window columns	295
75: Debug menu commands	297
76: Log file options	300
77: XLINK range check options	339
78: XLINK list file options	340
79: XLINK list file format options	341
80: XLINK checksum algorithms	345
81: cspybat parameters	353
82: Examples of C-SPY macro variables	362
83: C-SPY setup macros	366
84: Summary of system macros	367
85: __cancelInterrupt return values	369
86: __disableInterrupts return values	370
87: __driverType return values	370
88: __enableInterrupts return values	371
89: __evaluate return values	371
90: __openFile return values	372
91: __readFile return values	374
92: __setCodeBreak return values	377
93: __setDataBreak return values	378
94: __setSimBreak return values	379
95: __sourcePosition return values	380

Figures

1: Create New Project dialog box	26
2: Workspace window	27
3: New Workspace dialog box	27
4: Adding files to project1	28
5: Setting compiler options	29
6: Compilation message	30
7: Workspace window after compilation	31
8: Setting the option Scan for Changed Files	32
9: The C-SPY Debugger main window	36
10: Stepping in C-SPY	37
11: Using Step Into in C-SPY	38
12: Inspecting variables in the Auto window	39
13: Watching variables in the Watch window	40
14: Setting breakpoints	41
15: Register window	42
16: Output from the I/O operations	43
17: Reaching program exit in C-SPY	44
18: Setting a breakpoint in CPPTutor.cpp	50
19: Inspecting the function calls	51
20: Printing Fibonacci sequences	52
21: Specifying setup macro file	57
22: Inspecting the interrupt settings	58
23: Printing the Fibonacci values in the Terminal I/O window	60
24: IAR Embedded Workbench IDE window	70
25: Configure Tools dialog box	73
26: Customized Tools menu	74
27: Examples of workspaces and projects	76
28: Displaying a project in the Workspace window	80
29: Workspace window—an overview	81
30: General options	86
31: Editor window	94

32: Parentheses matching in editor window	97
33: Editor window status bar	97
34: Editor window code template menu	98
35: Specifying external command line editor	101
36: External editor DDE settings	102
37: IAR C-SPY Debugger and target systems	106
38: C-SPY highlighting source location	116
39: Viewing assembler variables in the Watch window	127
40: Breakpoint icons	130
41: Breakpoint Usage dialog box	133
42: Memory window	138
43: Stack window	139
44: Register window	140
45: Register Filter page	141
46: Macro Configuration dialog box	147
47: Quick Watch window	149
48: Profiling window	152
49: Graphs in Profiling window	152
50: Function details window	153
51: Code Coverage window	154
52: Simulator menu	160
53: Trace window	161
54: Trace toolbar	162
55: Function Trace window	163
56: Trace Expressions window	163
57: Find In Trace window	164
58: Find in Trace dialog box	165
59: Memory Access Setup dialog box	167
60: Edit Memory Access dialog box	169
61: Data breakpoints dialog box	171
62: Immediate breakpoints page	174
63: Breakpoint Usage dialog box	175
64: Simulated interrupt configuration	178
65: Simulation states - example 1	179

66: Simulation states - example 2	179
67: Interrupt Setup dialog box	180
68: Edit Interrupt dialog box	182
69: Forced Interrupt window	183
70: Interrupt Log window	185
71: IAR Embedded Workbench IDE window	192
72: IAR Embedded Workbench IDE toolbar	193
73: IAR Embedded Workbench IDE window status bar	194
74: Workspace window	194
75: Workspace window context menu	196
76: Source Code Control menu	197
77: Select Source Code Control Provider dialog box	199
78: Check In Files dialog box	200
79: Check Out File dialog box	201
80: Editor window	202
81: Editor window tab context menu	203
82: Editor window context menu	203
83: Source Browser window	207
84: Source Browser window context menu	208
85: Breakpoints window	209
86: Breakpoints window context menu	209
87: Code breakpoints page	211
88: Log breakpoints page	212
89: Enter Location dialog box	214
90: Build window (message window)	215
91: Build window context menu	215
92: Find in Files window (message window)	216
93: Find in Files window context menu	216
94: Tool Output window (message window)	217
95: Tool Output window context menu	217
96: Debug Log window (message window)	217
97: Debug Log window context menu	218
98: File menu	219
99: Edit menu	221

100: Find in Files dialog box	226
101: Incremental Search dialog box	227
102: Template dialog box	228
103: View menu	229
104: Project menu	231
105: Configurations for project dialog box	234
106: New Configuration dialog box	235
107: Create New Project dialog box	236
108: Batch Build dialog box	238
109: Edit Batch Build dialog box	239
110: Tools menu	240
111: Common Fonts options	241
112: Key Bindings options	242
113: Language options	243
114: Editor options	244
115: Configure Auto Indent dialog box	246
116: External Editor options	247
117: Editor Setup Files options	249
118: Editor Colors and Fonts options	250
119: Messages option	251
120: Message dialog box containing a Don't show again option	252
121: Projects options	253
122: Source Code Control options	254
123: Debugger options	255
124: Stack options	257
125: Register Filter options	259
126: Terminal I/O options	260
127: Configure Tools dialog box	261
128: Customized Tools menu	262
129: Filename Extensions dialog box	263
130: Filename Extension Overrides dialog box	264
131: Edit Filename Extensions dialog box	264
132: Configure Viewers dialog box	265
133: Edit Viewer Extensions dialog box	265

134: Window menu	266
135: Embedded Workbench Startup dialog box	267
136: C-SPY debug toolbar	271
137: C-SPY Disassembly window	271
138: Disassembly window context menu	272
139: Memory window	274
140: Memory window context menu	275
141: Fill dialog box	276
142: Memory Save dialog box	277
143: Memory Restore dialog box	278
144: Symbolic Memory window	279
145: Symbolic Memory window context menu	280
146: Register window	281
147: Watch window	282
148: Watch window context menu	282
149: Locals window	283
150: Auto window	284
151: Live Watch window	284
152: Quick Watch window	285
153: Statics window	286
154: Statics window context menu	286
155: Select Statics dialog box	287
156: Call Stack window	288
157: Call Stack window context menu	288
158: Terminal I/O window	289
159: Ctrl codes menu	289
160: Input Mode dialog box	290
161: Code Coverage window	290
162: Code coverage context menu	291
163: Profiling window	292
164: Profiling context menu	292
165: Stack window	294
166: Stack window context menu	296
167: Debug menu	297

168: Autostep settings dialog box	298
169: Macro Configuration dialog box	299
170: Log File dialog box	300
171: Terminal I/O Log File dialog box	301
172: Output options	303
173: Library Configuration options	305
174: Library Options page	306
175: Multi-file Compilation	309
176: Compiler language options	310
177: Compiler optimizations options	313
178: Compiler output options	314
179: Compiler list file options	316
180: Compiler preprocessor options	317
181: Compiler diagnostics options	319
182: Extra Options page for the compiler	320
183: Choosing macro quote characters	324
184: Assembler output options	324
185: Assembler preprocessor options	325
186: Extra Options page for the assembler	327
187: Custom tool options	329
188: Build actions options	331
189: XLINK output file options	333
190: XLINK extra output file options	336
191: Linker defined symbols options	337
192: Linker diagnostics options	338
193: Linker list file options	340
194: Linker config options	342
195: XLINK processing options	344
196: Extra Options page for the linker	346
197: Library builder output options	347
198: Generic C-SPY options	349
199: Extra Options page for the C-SPY debugger	351
200: C-SPY plugin options	352

Preface

Welcome to the IAR Embedded Workbench® IDE User Guide. The purpose of this guide is to help you fully utilize the features in IAR Embedded Workbench with its integrated Windows development tools. The IAR Embedded Workbench IDE is a very powerful Integrated Development Environment that allows you to develop and manage a complete embedded application project.

The user guide includes product overviews and reference information, as well as tutorials that will help you get started. It also describes the processes of editing, project managing, building, and debugging.

Note: Some descriptions in this guide only apply to certain versions of the IAR Embedded Workbench® IDE. For example, not all versions support C++.

Who should read this guide

You should read this guide if you want to get the most out of the features and tools available in the IAR Embedded Workbench IDE. In addition, you should have a working knowledge of:

- The C or C++ programming language
- Application development for embedded systems
- The architecture and instruction set of the processor (refer to the chip manufacturer's documentation)
- The operating system of your host computer.

Refer to the *IAR C/C++ Compiler Reference Guide*, *IAR Assembler Reference Guide*, and *IAR Linker and Library Tools Reference Guide* for more information about the other development tools incorporated in the IAR Embedded Workbench IDE.

How to use this guide

If you are new to using this product, we suggest that you start by reading *Part 1. Product overview* to give you an overview of the tools and the functions that the IAR Embedded Workbench IDE can offer.

If you already have had some experience using IAR Embedded Workbench, but need refreshing on how to work with the IAR development tools, *Part 2. Tutorials* is a good place to begin. The process of managing projects and building, as well as editing, can be found in *Part 3. Project management and building*, page 67, whereas information about how to use the C-SPY® Debugger can be found in *Part 4. Debugging*, page 103.

If you are an experienced user and need this guide only for reference information, see the reference chapters in *Part 6. Reference information* and the online help system available from the IAR Embedded Workbench **Help** menu.

Finally, we recommend the *Glossary* if you should encounter any unfamiliar terms in the IAR Systems user and reference guides.

What this guide contains

Below is a brief outline and summary of the chapters in this guide. Some chapters only apply to certain versions of the IAR Embedded Workbench® IDE, partly or in their entirety.

Part 1. Product overview

This section provides a general overview of all the IAR development tools so that you can become familiar with them:

- *Product introduction* provides a brief summary and lists the features offered in each of the IAR Systems development tools—IAR Embedded Workbench® IDE, IAR C/C++ Compiler, IAR Assembler, IAR XLINK Linker, IAR XAR Library Builder, IAR XLIB Librarian, and IAR C-SPY Debugger.
- *Installed files* describes the directory structure and the types of files it contains. The chapter also includes an overview of the documentation supplied with the IAR development tools.

Part 2. Tutorials

The tutorials give you hands-on training in order to help you get started with using the tools:

- *Creating an application project* guides you through setting up a new project, compiling your application, examining the list file, and linking your application. The tutorial demonstrates a typical development cycle, which is continued with debugging in the next chapter.
- *Debugging using the IAR C-SPY® Debugger* explores the basic facilities of the debugger.

- *Mixing C and assembler modules* demonstrates how you can easily combine source modules written in C with assembler modules. The chapter also demonstrates how the compiler can be used for examining the calling convention.
- *Using C++* shows how to create a C++ class, which creates two independent objects. The application is then built and debugged. This chapter only applies to product versions with C++ support.
- *Simulating an interrupt* shows how you can add an interrupt handler to the project and how this interrupt can be simulated using C-SPY facilities for simulated interrupts, breakpoints, and macros.
- *Creating and using libraries* demonstrates how to create library modules.

Part 3. Project management and building

This section describes the process of editing and building your application:

- *The development environment* introduces you to the IAR Embedded Workbench development environment. The chapter also demonstrates the facilities available for customizing the environment to meet your requirements.
- *Managing projects* describes how you can create workspaces with multiple projects, build configurations, groups, source files, and options that helps you handle different versions of your applications.
- *Building* discusses the process of building your application.
- *Editing* contains detailed descriptions about the IAR Embedded Workbench editor, how to use it, and the facilities related to its usage. The final section also contains information about how to integrate an external editor of your choice.

Part 4. Debugging

This section gives conceptual information about C-SPY functionality and how to use it:

- *The IAR C-SPY® Debugger* introduces some of the concepts that are related to debugging in general and to the IAR C-SPY Debugger in particular. It also introduces you to the C-SPY environment and how to setup, start, and configure C-SPY to reflect the target hardware.
- *Executing your application* describes how you initialize the IAR C-SPY Debugger, the conceptual differences between source and disassembly mode debugging, the facilities for executing your application, and finally, how you can handle terminal input and output.
- *Working with variables and expressions* defines the syntax of the expressions and variables used in C-SPY, as well as the limitations on variable information. The chapter also demonstrates the different methods for monitoring variables and expressions.

- *Using breakpoints* describes the breakpoint system and the different ways to define breakpoints.
- *Monitoring memory and registers* shows how you can examine memory and registers.
- *Using the C-SPY® macro system* describes the C-SPY macro system, its features, for what purposes these features can be used, and how to use them.
- *Analyzing your application* presents facilities for analyzing your application.

Part 5. IAR C-SPY® Simulator

- *Simulator-specific debugging* describes the functionality specific to the simulator.
- *Simulating interrupts* contains detailed information about the C-SPY interrupt simulation system and how to configure the simulated interrupts to make them reflect the interrupts of your target hardware.

Part 6. Reference information

- *IAR Embedded Workbench® IDE reference* contains detailed reference information about the development environment, such as details about the graphical user interface.
- *C-SPY® Debugger reference* provides detailed reference information about the graphical user interface of the IAR C-SPY Debugger.
- *General options* specifies the target, output, library, heap, and stack options.
- *Compiler options* specifies compiler options for language, optimizations, code, output, list file, preprocessor, and diagnostics.
- *Assembler options* describes the assembler options for language, output, list, preprocessor, and diagnostics.
- *Custom build options* describes the options available for custom tool configuration.
- *Build actions options* describes the options available for pre-build and post-build actions.
- *Linker options* describes the XLINK options for output, defining symbols, diagnostics, list generation, setting up the include paths, input, and processing.
- *Library builder options* describes the XAR options available in the Embedded Workbench.
- *Debugger options* gives reference information about generic C-SPY options.
- *The IAR C-SPY Command Line Utility—cspybat* describes how to use the C-SPY debugger in batch mode.
- *C-SPY® macros reference* gives reference information about C-SPY macros, such as a syntax description of the macro language, summaries of the available setup

macro functions, and pre-defined system macros. Finally, a description of each system macro is provided.

Other documentation

The complete set of IAR development tools are described in a series of guides. For information about:

- Programming for the IAR C/C++ Compiler, refer to the *IAR C/C++ Compiler Reference Guide*
- Programming for the IAR Assembler, refer to the *IAR Assembler Reference Guide*
- Using the IAR XLINK Linker, the IAR XAR Library Builder, and the IAR XLIB Librarian, refer to the *IAR Linker and Library Tools Reference Guide*

All of these guides are delivered in hypertext PDF or HTML format on the installation media. Some of them are also delivered as printed books. Note that additional documentation might be available on the **Help** menu depending on your product installation.

Recommended web sites:

- The chip manufacturer web site contains information and news about the microcontroller.
- The IAR Systems web site, **www.iar.com**, holds application notes and other product information.
- Finally, the Embedded C++ Technical Committee web site, **www.caravan.net/ec2plus**, contains information about the Embedded C++ standard.

Document conventions

This book uses the following typographic conventions:

Style	Used for
computer	Text that you type or that appears on the screen.
<i>parameter</i>	A label representing the actual value you should type as part of a command. Note that this style is also used for <i>cpuname</i> , <i>configfile</i> , <i>libraryfile</i> , and other labels representing your product, as well as for the numeric part of filename extensions— <i>xx</i> .
[option]	An optional part of a command.
{option}	A mandatory part of a command.

Table 1: Typographic conventions used in this guide





Style	Used for
a b c	Alternatives in a command.
bold	Names of menus, menu commands, buttons, and dialog boxes that appear on the screen.
<i>reference</i>	A cross-reference within this guide or to another guide.
<i>emphasis</i>	Important terms and concepts.
...	An ellipsis indicates that the previous item can be repeated an arbitrary number of times.
	Identifies instructions specific to the IAR Embedded Workbench IDE interface.
	Identifies instructions specific to the command line interface.
	Identifies helpful tips and programming hints.

Table 1: Typographic conventions used in this guide (Continued)

Part I. Product overview

This part of the IAR Embedded Workbench® IDE User Guide includes the following chapters:

- Product introduction
- Installed files.





Product introduction

The IAR Embedded Workbench® IDE is a very powerful Integrated Development Environment, that allows you to develop and manage complete embedded application projects. It is a development platform, with all the features you would expect to find in your everyday working place.

This chapter describes the IAR Embedded Workbench IDE and provides a general overview of all the tools that are integrated in this product.

The IAR Embedded Workbench IDE

The IAR Embedded Workbench IDE is the framework where all necessary tools are seamlessly integrated:

- The highly optimizing IAR C/C++ Compiler
- The IAR Assembler
- The versatile IAR XLINK Linker
- The IAR XAR Library Builder and the IAR XLIB Librarian
- A powerful editor
- A project manager
- A command line build utility
- IAR C-SPY® debugger, a state-of-the-art high-level language debugger.

IAR Embedded Workbench is available for a large number of microprocessors and microcontrollers in the 8-, 16-, and 32-bit segments, allowing you to stay within a well-known development environment also for your next project. It provides an easy-to-learn and highly efficient development environment with maximum code inheritance capabilities, comprehensive and specific target support. IAR Embedded Workbench promotes a useful working methodology, and thus a significant reduction of the development time can be achieved by using the IAR Systems tools. We call this concept “Different Architectures. One Solution.”

If you want detailed information about supported target processors, contact your software distributor or your IAR representative, or visit the IAR Systems web site **www.iar.com** for information about recent product releases.

AN EXTENSIBLE AND MODULAR ENVIRONMENT

Although the IAR Embedded Workbench IDE provides all the features required for a successful project, we also recognize the need to integrate other tools. Therefore the IAR Embedded Workbench IDE can be easily adapted to work with your favorite editor and source code control system. The IAR XLINK Linker can produce a large number of output formats, allowing for debugging on most third-party emulators. Support for RTOS-aware debugging and high-level debugging of state machines can also be added to the product.

The compiler, assembler, and linker can also be run from a command line environment, if you want to use them as external tools in an already established project environment.

FEATURES

The IAR Embedded Workbench IDE is a flexible integrated development environment, allowing you to develop applications for a variety of different target processors. It provides a convenient Windows interface for rapid development and debugging.

Project management

The IAR Embedded Workbench IDE comes with functions that will help you to stay in control of all project modules, for example, C or C++ source code files, assembler files, include files, and other related modules. You create workspaces and let them contain one or several projects. Files can be grouped, and options can be set on all levels—project, group, or file. Changes are tracked so that a request for rebuild will retranslate all required modules, making sure that no executable files contain out-of-date modules. The following list shows some additional features:

- Project templates to create a project that can be built and executed *out of the box* for a smooth development startup
- Hierarchical project representation
- Source browser with an hierarchical symbol presentation
- Options can be set globally, on groups of source files, or on individual source files
- The Make command automatically detects changes and performs only the required operations
- Text-based project files
- Custom Build utility to expand the standard tool chain in an easy way
- Command line build with the project file as input.

Source code control

Source code control (SCC)—or revision control—is useful for keeping track of different versions of your source code. IAR Embedded Workbench can identify and access any

third-party source code control system that conforms to the SCC interface published by Microsoft.

Window management

To give you full and convenient control of the placement of the windows, each window is *dockable* and you can optionally organize the windows in tab groups. The system of dockable windows also provides a space-saving way to keep many windows open at the same time. It also makes it easy to rearrange the size of the windows.

The text editor

The integrated text editor allows editing of multiple files in parallel, and provides all basic editing features expected from a modern editor, including unlimited undo/redo and automatic completion. In addition, it provides functions specific to software development, like coloring of keywords (C/C++, assembler, and user-defined), block indent, and function navigation within source files. It also recognizes C language elements like matching brackets. The following list shows some additional features:

- Context-sensitive help system that can display reference information for DLIB library functions
- Syntax of C or C++ programs and assembler directives shown using text styles and colors
- Powerful search and replace commands, including multi-file search
- Direct jump to context from error listing
- Multibyte character support
- Parenthesis matching
- Automatic indentation
- Bookmarks
- Unlimited undo and redo for each window.

DOCUMENTATION

The IAR Embedded Workbench IDE is documented in the *IAR Embedded Workbench® IDE User Guide* (this guide). There is also help and hypertext PDF versions of the user documentation available online.

IAR C-SPY Debugger

The IAR C-SPY Debugger is a high-level-language debugger for embedded applications. It is designed for use with the IAR Systems compilers and assemblers, and

it is completely integrated in the IAR Embedded Workbench IDE, providing seamless switching between development and debugging. This will give you possibilities such as:

- Editing while debugging. During a debug session, corrections can be made directly into the same source code window that is used to control the debugging. Changes will be included in the next project rebuild.
- Setting source code breakpoints before starting the debugger. Breakpoints in source code will be associated with the same piece of source code even if additional code is inserted.

The IAR C-SPY Debugger consists both of a general part which provides a basic set of C-SPY features, and of a driver. The C-SPY driver is the part that provides communication with and control of the target system. The driver also provides a user interface—special menus, windows, and dialog boxes—to the functions provided by the target system, for instance, special breakpoints.

Contact your software distributor or IAR Systems representative for information about available C-SPY drivers. You can also find information on the IAR Systems website, **www.iar.com**.

Depending on your product installation, the IAR C-SPY Debugger is available with a simulator driver and optional drivers for hardware debugger systems. For information about hardware debugger systems, see the online help system available from the **Help** menu.

GENERAL C-SPY DEBUGGER FEATURES

Because IAR Systems provides an entire tool chain, the output provided by the compiler and linker can include extensive debug information for the debugger, resulting in good debugging possibilities for you. The IAR C-SPY Debugger offers the general features described in this section.

Source and disassembly level debugging

The IAR C-SPY Debugger allows you to switch between source and disassembly debugging as required, for both C or C++ and assembler source code.

Debugging the C or C++ source code provides the quickest and easiest way of verifying the program logic of your application whereas disassembly debugging lets you focus on the critical sections of your application, and provides you with precise control over the hardware. In Mixed-Mode display, the debugger also displays the corresponding C/C++ source code interleaved with the disassembly listing.

Single-stepping on a function call level

Compared to traditional debuggers, where the finest granularity for source level stepping is line by line, C-SPY provides a finer level of control by identifying every statement and function call as a step point. This means that each function calls—inside expressions, as well as function calls being part of parameter lists to other functions—can be single-stepped. The latter is especially useful when debugging C++ code, where numerous extra function calls are made, for example to object constructors.

The debug information also presents inlined functions as if a call was made, making the source code of the inlined function available.

Code and data breakpoints

The C-SPY breakpoint system lets you set breakpoints of various kinds in the application being debugged, allowing you to stop at locations of particular interest. You can set a *code* breakpoint to investigate whether your program logic is correct. You can also set a *data* breakpoint, to investigate how and when the data changes. Finally, you can add conditions and connect actions to your breakpoints.

Monitoring variables and expressions

When you work with variables and expressions you are presented with a wide choice of facilities. Any variable and expression can be evaluated in one-shot views. You can easily both monitor and log values of a defined set of expressions during a longer period of time. You have instant control over local variables, and real-time data is displayed non-intrusively. Finally, the last referred variables are displayed automatically.

Container awareness

When you run your application in the IAR C-SPY Debugger, you can view the elements of library data types such as STL lists and vectors. This gives you a very good overview and premium debugging opportunities when you work with C++ STL containers.

Call stack information

The IAR C/C++ Compiler generates extensive call stack information. This allows C-SPY to show, without any runtime penalty, the complete stack of function calls wherever the program counter is. You can select any function in the call stack, and for each function you get valid information for local variables and registers available.

Powerful macro system

The IAR C-SPY Debugger includes a powerful internal macro system, to allow you to define complex sets of actions to be performed. C-SPY macros can be used solely or in

conjunction with complex breakpoints and—if you are using the simulator—the interrupt simulation system to perform a wide variety of tasks.

Additional general C-SPY Debugger features

This list shows some additional features:

- A modular and extensible architecture allowing third-party extensions to the debugger, for example, real-time operating systems, peripheral simulation modules, and emulator drivers
- Threaded execution keeps the IDE responsive while running the target application
- Automatic stepping
- Source browser provides easy navigation to functions, types and variables
- Extensive type recognition of variables
- Configurable registers (CPU and peripherals) and memory windows
- Dedicated Stack window
- Support for code coverage and function level profiling
- Target application can access files on host PC using file I/O
- Optional terminal I/O emulation
- UBROF, Intel-extended, and Motorola input formats supported.

C-SPY PLUGIN MODULES

The IAR C-SPY Debugger is designed as a modular architecture with an open SDK that can be used for implementing additional functionality to C-SPY in the form of plugin modules. These modules can be seamlessly integrated in the IAR Embedded Workbench IDE.

Plugin modules can be provided by IAR Systems, as well as by third-party suppliers. Example of such modules are:

- Code Coverage, Profiling, and the Stack window, all well-integrated in the IAR Embedded Workbench IDE.
- The various C-SPY drivers for debugging using certain debug systems.
- RTOS plugin modules for support for real-time OS awareness debugging.
- C-SPYLink that bridges visualSTATE and IAR Embedded Workbench to make true high-level state machine debugging possible directly in C-SPY, in addition to the normal C level symbolic debugging. For more information, refer to the documentation provided with IAR visualSTATE.

For more information about the C-SPY SDK, contact IAR Systems.

RTOS AWARENESS

The IAR C-SPY Debugger supports real-time OS awareness debugging.

RTOS plugin modules can be provided by IAR Systems, as well as by third-party suppliers. Contact your software distributor or IAR Systems representative, alternatively visit the IAR Systems web site, for information about supported RTOS modules.

IAR C-SPY SIMULATOR

The C-SPY simulator driver simulates the functions of the target processor entirely in software. With this driver, the program logic can be debugged long before any hardware is available. Because no hardware is required, it is also the most cost-effective solution for many applications.

Features

In addition to the general features of the C-SPY Debugger the simulator driver also provides:

- Instruction-level simulation
- Memory configuration and validation
- Interrupt simulation
- Peripheral simulation, using the C-SPY macro system in conjunction with immediate breakpoints.

For additional information about the IAR C-SPY Simulator, refer to *Part 5. IAR C-SPY® Simulator* in this guide.

DOCUMENTATION

The IAR C-SPY Debugger is documented in the *IAR Embedded Workbench® IDE User Guide* (this guide). Generic debugger features are described in *Part 4. Debugging*, whereas features specific to each debugger driver are described in *Part 5. IAR C-SPY® Simulator*. Features specific to supported hardware debugger systems are described in the online help system available from the **Help** menu. There are also help and hypertext PDF versions of the documentation available online.

IAR C/C++ Compiler

The IAR C/C++ Compiler is a state-of-the-art compiler that offers the standard features of the C or C++ languages, plus many extensions designed to take advantage of the target-specific facilities.

The compiler is integrated with other IAR Systems software in the IAR Embedded Workbench IDE.

FEATURES

The IAR C/C++ Compiler provides the following features:

Code generation

- Generic and target-specific optimization techniques produce very efficient machine code
- Comprehensive output options, including relocatable object code, assembler source code, and list files with optional assembler mnemonics
- The object code can be linked together with assembler routines
- Generation of extensive debug information.

Language facilities

- Support for the C and C++ programming languages (some product versions do not support C++)
- Support for IAR Extended EC++ with features such as full template support, namespace support, the cast operators `static_cast`, `const_cast`, and `reinterpret_cast`, as well as the Standard Template Library (STL). Applies only to product versions that support C++.
- Placement of classes in different memory types
- Conformance to the ISO/ANSI C standard for a free-standing environment
- Target-specific language extensions, such as special function types, extended keywords, pragma directives, predefined symbols, intrinsic functions, absolute allocation, and inline assembler
- Standard library of functions applicable to embedded systems
- IEEE-compatible floating-point arithmetic
- Interrupt functions can be written in C or C++.

Type checking

- Extensive type checking at compile time
- External references are type checked at link time
- Link-time inter-module consistency checking of the application.

RUNTIME ENVIRONMENT

There are several mechanisms available for customizing the runtime environment and the runtime libraries. For further information about the runtime environment, see the *IAR C/C++ Compiler Reference Guide*.

DOCUMENTATION

The IAR C/C++ Compiler is documented in the *IAR C/C++ Compiler Reference Guide*.

IAR Assembler

The IAR Assembler is integrated with the other IAR Systems software tools. It is a powerful relocating macro assembler (supporting the Intel/Motorola style) with a versatile set of directives and expression operators. The assembler features a built-in C language preprocessor.

FEATURES

The IAR Assembler provides the following features:

- C preprocessor
- List file with extensive cross-reference output
- Number of symbols and program size limited only by available memory
- Support for complex expressions with external references
- Up to 65536 relocatable segments per module
- 255 significant characters in symbol names.

DOCUMENTATION

The IAR Assembler is documented in the *IAR Assembler Reference Guide*.

IAR XLINK Linker

The IAR XLINK Linker links one or more relocatable object files produced by the IAR Assembler or IAR C/C++ Compiler to produce machine code for the processor you are using. It is equally well suited for linking small, single-file, absolute assembler applications as for linking large, relocatable, multi-module, C/C++, or mixed C/C++ and assembler applications.

It can generate one out of more than 30 industry-standard loader formats, in addition to the IAR Systems proprietary debug format used by the IAR C-SPY Debugger—UBROF (Universal Binary Relocatable Object Format). An application can be made up of any

number of UBROF relocatable files, in any combination of assembler and C or C++ applications.

The final output produced by the IAR XLINK Linker is an absolute, target-executable object file that can be downloaded to the processor or to a hardware emulator. Optionally, the output file might or might not contain debug information depending on the output format you choose.

The IAR XLINK Linker supports user libraries, and will load only those modules that are actually needed by the application you are linking. Before linking, the IAR XLINK Linker performs a full C-level type checking across all modules as well as a full dependency resolution of all symbols in all input files, independent of input order. It also checks for consistent compiler settings for all modules and makes sure that the correct version and variant of the C or C++ runtime library is used.

FEATURES

- Full inter-module type checking
- Simple override of library modules
- Flexible segment commands allow detailed control of code and data placement
- Link-time symbol definition enables flexible configuration control
- Optional code checksum generation for runtime checking
- Removes unused code and data.

DOCUMENTATION

The IAR XLINK Linker is documented in the *IAR Linker and Library Tools Reference Guide*.

IAR XAR Library Builder and IAR XLIB Librarian

A library is a single file that contains a number of relocatable object modules, each of which can be loaded independently from other modules in the file as it is needed. The IAR XAR Library Builder assists you to build libraries easily. In addition the IAR XLIB Librarian enables you to manipulate the relocatable library object files produced by the IAR Systems assembler and compiler.

A library file is no different from any other relocatable object file produced by the assembler or compiler, except that it includes a number of modules of the `LIBRARY` type. All C or C++ applications make use of libraries, and the IAR C/C++ Compiler is supplied with a number of standard library files.

FEATURES

The IAR XAR Library Builder and IAR XLIB Librarian both provide the following features:

- Modules can be combined into a library file
- Interactive or batch mode operation.

The IAR XLIB Librarian provides the following additional features:

- Modules can be listed, added, inserted, replaced, or removed
- Modules can be changed between program and library type
- Segments can be listed
- Symbols can be listed.

DOCUMENTATION

The IAR XLIB Librarian and the IAR XAR Library Builder are documented in the *IAR Linker and Library Tools Reference Guide*, a PDF document available from the IAR Embedded Workbench IDE **Help** menu.

Installed files

This chapter describes which directories are created during installation and what file types are used. At the end of the chapter, there is a section that describes what information you can find in the various guides and online documentation.

Refer to the *QuickStart Card* and the *Installation and Licensing Guide*, which are delivered with the product, for system requirements and information about how to install and register the IAR Systems products.

Directory structure

The installation procedure creates several directories to contain the different types of files used with the IAR Systems development tools. The following sections give a description of the files contained by default in each directory.

ROOT DIRECTORY

The root directory created by the default installation procedure is the `x:\Program Files\IAR Systems\Embedded Workbench 5.n\` directory where *x* is the drive where Microsoft Windows is installed and *5.n* is the version number of the IAR Embedded Workbench IDE.

In the root directory there are two subdirectories—*common* and one named after the processor you are using. The latter directory will hereafter be referred to as *cpuname*.

Note: The installation path can be different from the one shown above depending on previously installed IAR products, and on your preferences.

THE CPUNAME DIRECTORY

The *cpuname* directory contains all product-specific subdirectories.

The *cpuname\bin* directory

The *cpuname\bin* subdirectory contains executable files for target-specific components, such as the IAR C/C++ Compiler, the IAR Assembler, and the IAR C-SPY® drivers.

The *cpuname*\config directory

The *cpuname*\config subdirectory contains files used for configuring the development environment and projects, for example:

- Linker command files (*.xcl)
- Special function register description files (*.sfr)
- C-SPY device description files (*.ddf)
- Device selection files (*.ixx, *.menu)
- Flash loader applications for different devices (*.dxx), depends on your product version
- Syntax coloring configuration files (*.cfg)
- Project templates for both application and library projects (*.ewp), and for the library projects, the corresponding library configuration files.

The *cpuname*\doc directory

The *cpuname*\doc subdirectory contains release notes with recent additional information about the tools. We recommend that you read all of these files. The directory also contains online hypertext versions in hypertext PDF format of this user guide, and of the reference guides, as well as online help files (*.chm).

The *cpuname*\drivers directory

The *cpuname*\drivers subdirectory contains low-level device drivers, typically USB drivers, required by the C-SPY drivers.

The *cpuname*\examples directory

The *cpuname*\examples subdirectory contains files related to example projects, which can be opened from the **Startup Screen** dialog box.

The *cpuname*\inc directory

The *cpuname*\inc subdirectory holds include files, such as the header files for the standard C or C++ library. There are also specific header files defining special function registers (SFRs); these files are used by both the compiler and the assembler.

The *cpuname*\lib directory

The *cpuname*\lib subdirectory holds prebuilt libraries and the corresponding library configuration files, used by the compiler.

The *cpuname*\plugins directory

The *cpuname*\plugins subdirectory contains executable files and description files for components that can be loaded as plugin modules.

The *cpuname*\powerpac directory

The *cpuname*\powerpac subdirectory contains files related to the add-on product IAR PowerPac. This directory is available if you have installed IAR PowerPac.

The *cpuname*\src directory

The *cpuname*\src subdirectory holds source files for some configurable library functions. This directory also holds the library source code.

The *cpuname*\tutor directory

The *cpuname*\tutor subdirectory contains the files used for the tutorials in this guide.

THE COMMON DIRECTORY

The *common* directory contains subdirectories for components shared by all IAR Embedded Workbench products.

The *common*\bin directory

The *common*\bin subdirectory contains executable files for components common to all IAR Embedded Workbench products, such as the IAR XLINK Linker, the IAR XLIB Librarian, the IAR XAR Library Builder, the editor and the graphical user interface components. The executable file for the IAR Embedded Workbench IDE is also located here.

The *common*\config directory

The *common*\config subdirectory contains files used by IAR Embedded Workbench IDE for holding settings in the development environment.

The *common*\doc directory

The *common*\doc subdirectory contains readme files with recent additional information about the components common to all IAR Embedded Workbench products, such as the linker and library tools. We recommend that you read these files. The directory also contains an online version in PDF format of the *IAR Linker and Library Tools Reference Guide*.

The common\plugins directory

The `common\plugins` subdirectory contains executable files and description files for components that can be loaded as plugin modules, for example modules for Code coverage and Profiling.

The common\src directory

The `common\src` subdirectory contains source files for components common to all IAR Embedded Workbench products, such as a sample reader of the IAR XLINK Linker output format `SIMPLE`.

THE METADATA DIRECTORY

The `metadata` directory contains metadata (version number, name, etc.) about the installed product components. Do not modify these files.

File types

The versions of the IAR Systems development tools use the following default filename extensions to identify the produced files and other recognized file types:

Ext.	Type of file	Output from	Input to
axx	Target application	XLINK	EPROM, C-SPY, etc.
asm	Assembler source code	Text editor	Assembler
bat	Windows command batch file	C-SPY	Windows
c	C source code	Text editor	Compiler
cfg	Syntax coloring configuration	Text editor	IAR Embedded Workbench IDE
chm	Online help system	--	IAR Embedded Workbench IDE
cpp	Embedded C++ source code	Text editor	Compiler
dxx	Target application with debug information	XLINK	C-SPY and other symbolic debuggers
dat	Macros for formatting of STL containers	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
dbg	Target application with debug information	XLINK	C-SPY and other symbolic debuggers
dbgt	Debugger desktop settings	C-SPY	C-SPY
ddf	Device description file	Text editor	C-SPY

Table 2: File types

Ext.	Type of file	Output from	Input to
dep	Dependency information	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
dni	Debugger initialization file	C-SPY	C-SPY
ewd	Project settings for C-SPY	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
ewp	IAR Embedded Workbench project (current version)	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
ewplugin	IAR Embedded Workbench IDE description file for plugin modules	--	IAR Embedded Workbench IDE
eww	Workspace file	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
fnt	Formatting information for the Locals and Watch windows	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
h	C/C++ or assembler header source	Text editor	Compiler or assembler #include
helpfiles	Help menu configuration file	Text editor	IAR Embedded Workbench IDE
i	Preprocessed source	Compiler	Compiler
ixx	Device selection file	Text editor	IAR Embedded Workbench IDE
inc	Assembler header source	Text editor	Assembler #include
ini	Project configuration	IAR Embedded Workbench IDE	—
log	Log information	IAR Embedded Workbench IDE	—
lst	List output	Compiler and assembler	—
mac	C-SPY macro definition	Text editor	C-SPY
map	List output	XLINK	—
menu	Device selection file	Text editor	IAR Embedded Workbench IDE
par	Parameter file	IAR Embedded Workbench IDE	XLINK setup utility

Table 2: File types (Continued)

Ext.	Type of file	Output from	Input to
pbd	Source browse information	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
pbi	Source browse information	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
pew	IAR Embedded Workbench project (old project format)	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
prj	IAR Embedded Workbench project (old project format)	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
rxx	Object module	Compiler and assembler	XLINK, XAR, and XLIB
sxx	Assembler source code	Text editor	IAR Assembler
sfr	Special function register definitions	Text editor	C-SPY
tcl	XLINK template command file	Text editor	XLINK setup utility
vsp	visualSTATE project files	IAR visualSTATE Designer	IAR visualSTATE Designer and IAR Embedded Workbench IDE
wsdt	Workspace desktop settings	IAR Embedded Workbench IDE	IAR Embedded Workbench IDE
xcl	Extended command line	Text editor	Assembler, compiler, linker
xlb	Extended librarian batch command	Text editor	XLIB

Table 2: File types (Continued)

Note: The notation *xx* stands for two digits, which form an identifier for the processor you are using.

When you run the IAR Embedded Workbench IDE, some files are created and located in dedicated directories under your project directory, by default \$PROJ_DIR\$\Debug, \$PROJ_DIR\$\Release, \$PROJ_DIR\$\settings, and the file *.dep under the installation directory. None of these directories or files affect the execution of the IAR Embedded Workbench IDE, which means you can safely remove them if required.

FILES WITH NON-DEFAULT FILENAME EXTENSIONS



In the IAR Embedded Workbench IDE you can increase the number of recognized filename extensions using the **Filename Extensions** dialog box, available from the **Tools** menu. You can also connect your filename extension to a specific tool in the tool chain. See *Filename Extensions dialog box*, page 263.



On the command line, you can override the default filename extension by including an explicit extension when specifying a filename.



Note: If you run the tools from the command line, the XLINK listings (map files) will by default have the extension `lst`, which might overwrite the list file generated by the compiler. Therefore, we recommend that you name XLINK map files explicitly, for example `project1.map`.

Documentation

This section briefly describes the information that is available in the user and reference guides, in the online help, and on the Internet.

You can access the online documentation from the **Help** menu in the IAR Embedded Workbench IDE. Help is also available via the F1 key in the IAR Embedded Workbench IDE.

We recommend that you read the file `readme.htm` for recent information that might not be included in the user guides. It is located in the `cpuname\doc` directory.

Note: Additional documentation might be available depending on your product installation.

THE USER AND REFERENCE GUIDES

The user and reference guides provided with IAR Embedded Workbench are as follows:

IAR Embedded Workbench® IDE User Guide

This guide. For a brief overview, see *What this guide contains*, page xxxiv.

IAR C/C++ Compiler Reference Guide

This guide provides reference information about the IAR C/C++ Compiler. You should refer to this guide for information about:

- How to configure the compiler to suit your target processor and application requirements
- How to write efficient code for your target processor
- The assembler language interface and the calling convention
- The available data types
- The runtime libraries
- The IAR language extensions.

IAR Assembler Reference Guide

This guide provides reference information about the IAR Assembler, including details of the assembler source format, and reference information about the assembler operators, directives, mnemonics, and diagnostics.

IAR Linker and Library Tools Reference Guide

This online PDF guide provides reference information about the IAR linker and library tools:

- The IAR XLINK Linker reference sections provide information about XLINK options, output formats, environment variables, and diagnostics.
- The IAR XAR Library Builder reference sections provide information about XAR options and output.
- The IAR XLIB Librarian reference sections provide information about XLIB commands, environment variables, and diagnostics.

ONLINE HELP

The context-sensitive online help contains reference information about the menus and dialog boxes in the IAR Embedded Workbench IDE. There is also keyword reference information for library-specific functions. To obtain reference information for a function, select the function name in the editor window and press F1.

IAR ON THE WEB


The latest news from IAR Systems can be found at the web site **www.iar.com**, available from the **Help** menu in the Embedded Workbench IDE. Visit it for information about:

- Product announcements
- Updates and news about current versions
- Special offerings
- Evaluation copies of the IAR Systems products
- Technical Support, including technical notes
- Application notes
- Links to chip manufacturers and other interesting sites
- Distributors; the names and addresses of distributors in each country.

Part 2. Tutorials

This part of the IAR Embedded Workbench® IDE User Guide contains the following chapters:

- Creating an application project
- Debugging using the IAR C-SPY® Debugger
- Mixing C and assembler modules
- Using C++
- Simulating an interrupt
- Creating and using libraries.





Creating an application project

This chapter introduces you to the IAR Embedded Workbench® integrated development environment (IDE). The tutorial demonstrates a typical development cycle and shows how you use the compiler and the linker to create a small application for your device. For instance, creating a workspace, setting up a project with C source files, and compiling and linking your application.

The development cycle continues in the next chapter, see *Debugging using the IAR C-SPY® Debugger*, page 35.

Setting up a new project

Using the IAR Embedded Workbench IDE, you can design advanced project models. You create a *workspace* to which you add one or several *projects*. There are ready-made *project templates* for both application and library projects. Each project can contain a hierarchy of *groups* in which you collect your *source files*. For each project you can define one or several *build configurations*. For more details about designing project models, see the chapter *Managing projects* in this guide.

Because the application in this tutorial is a simple application with very few files, the tutorial does not need an advanced project model.

We recommend that you create a specific directory where you can store all your project files. In this tutorial we call the directory `projects`. You can find all the files needed for the tutorials in the `cpuname\tutor` directory. Make a copy of the `tutor` directory in your `projects` directory.

Before you can create your project you must first create a workspace.

CREATING A WORKSPACE WINDOW

The first step is to create a new workspace for the tutorial application. When you start the IAR Embedded Workbench IDE for the first time, there is already a ready-made workspace, which you can use for the tutorial projects. If you are using that workspace, you can ignore the first step.

Choose **File>New>Workspace**. Now you are ready to create a project and add it to the workspace.

CREATING THE NEW PROJECT

- 1 To create a new project, choose **Project>Create New Project**. The **Create New Project** dialog box appears, which lets you base your new project on a project template.

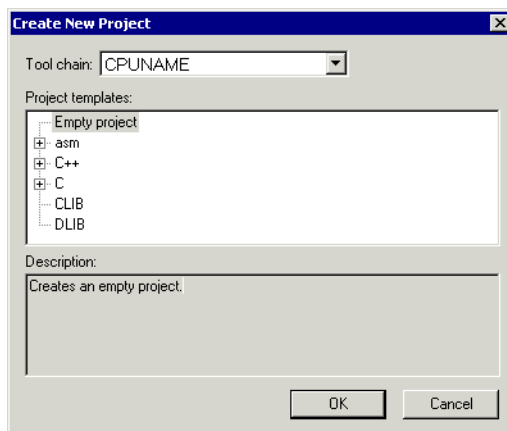


Figure 1: Create New Project dialog box

- 2 From the **Tool chain** drop-down list, choose the tool chain you are using and click **OK**.
- 3 For this tutorial, select the project template **Empty project**, which simply creates an empty project that uses default project settings.
- 4 In the standard **Save As** dialog box that appears, specify where you want to place your project file, that is, in your newly created `projects` directory. Type `project1` in the **File name** box, and click **Save** to create the new project.

The project will appear in the Workspace window.

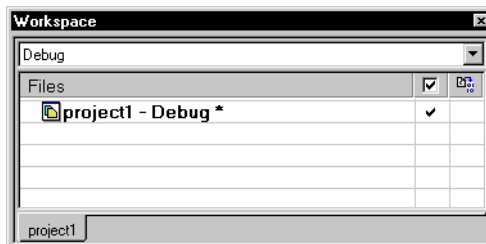


Figure 2: Workspace window

By default two build configurations are created: Debug and Release. In this tutorial only Debug will be used. You choose the build configuration from the drop-down menu at the top of the window. The asterisk in the project name indicates that there are changes that have not been saved.

A project file—with the filename extension `ewp`—will be created in the `projects` directory, not immediately, but later on when you save the workspace. This file contains information about your project-specific settings, such as build options.

- 5 Before you add any files to your project, you should save the workspace. Choose **File>Save Workspace** and specify where you want to place your workspace file. In this tutorial, you should place it in your newly created `projects` directory. Type `tutorials` in the **File name** box, and click **Save** to create the new workspace.

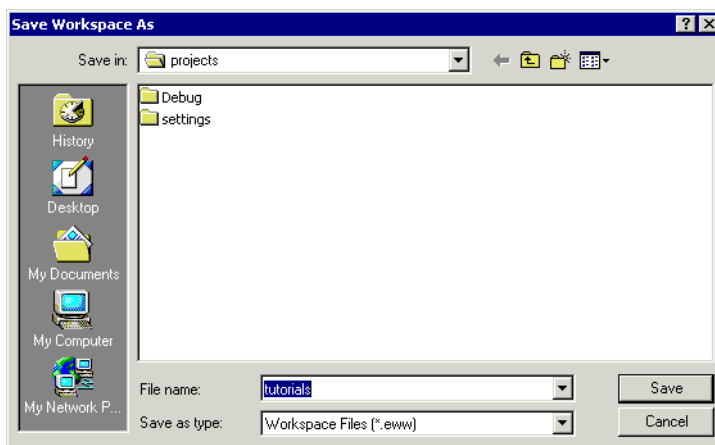


Figure 3: New Workspace dialog box

A workspace file—with the filename extension `eww`—has now been created in the `projects` directory. This file lists all projects that you will add to the workspace. Information related to the current session, such as the placement of windows and breakpoints is located in the files created in the `projects\settings` directory.

ADDING FILES TO THE PROJECT

This tutorial uses the source files `Tutor.c` and `Utilities.c`.

- The `Tutor.c` application is a simple program using only standard features of the C language. It initializes an array with the ten first Fibonacci numbers and prints the result to `stdout`.
- The `Utilities.c` application contains utility routines for the Fibonacci calculations.

Creating several *groups* is a possibility for you to organize your source files logically according to your project needs. However, because there are only two files in this project there is no need for creating a group. For more information about how to create complex project structures, see the chapter *Managing projects*.

- 1 In the Workspace window, select the destination to which you want to add a source file; a group or, as in this case, directly to the project.
- 2 Choose **Project>Add Files** to open a standard browse dialog box. Locate the files `Tutor.c` and `Utilities.c`, select them in the file selection list, and click **Open** to add them to the `project1` project.

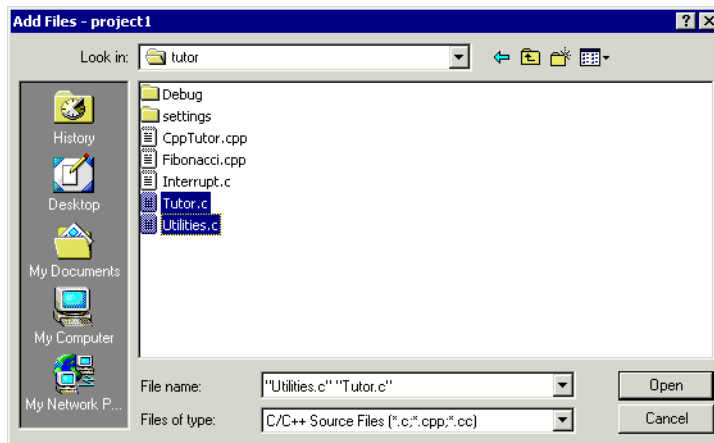


Figure 4: Adding files to `project1`

SETTING PROJECT OPTIONS

Now you will set the project options. For application projects, options can be set on all levels of nodes. First you will set the general options to suit the processor configuration in this tutorial. Because these options must be the same for the whole build configuration, they must be set on the project node.

- 1 Select the project folder icon **project1 - Debug** in the Workspace window and choose **Project>Options**. In this tutorial you should use the default settings. Then set up the compiler options for the project.
- 2 Select **C/C++ Compiler** in the **Category** list to display the compiler option pages.

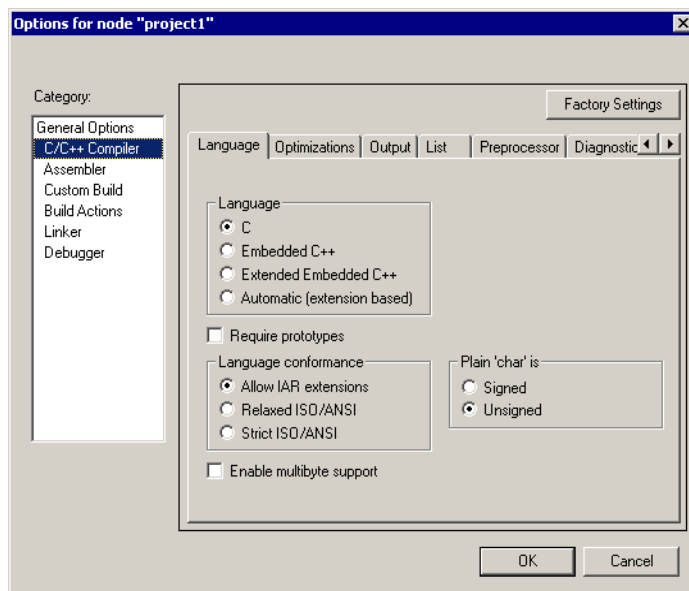


Figure 5: Setting compiler options

- 3 Verify that default settings are used. In addition to the default settings, click the **List** page, and select the options **Output list file** and **Assembler mnemonics**. Click **OK** to set the options you have specified.

Note: It is possible to customize the amount of information to be displayed in the Build messages window. In this tutorial, the default setting is not used. Thus, the contents of the Build messages window on your screen might differ from the screen shots.

The project is now ready to be built.

Compiling and linking the application

You can now compile and link the application. You should also create a compiler list file and a linker map file and view both of them.

COMPILING THE SOURCE FILES

1 To compile the file `Utilities.c`, select it in the Workspace window.

2 Choose **Project>Compile**.



Alternatively, click the **Compile** button in the toolbar or choose the **Compile** command from the context menu that appears when you right-click on the selected file in the Workspace window.

The progress will be displayed in the Build messages window.

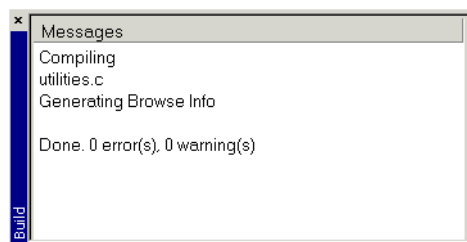


Figure 6: Compilation message

3 Compile the file `Tutor.c` in the same manner.

The IAR Embedded Workbench IDE has now created new directories in your project directory. Because you are using the build configuration **Debug**, a **Debug** directory has been created containing the directories `List`, `Obj`, and `Exe`:

- The `List` directory is the destination directory for the list files. The list files have the extension `lst`.
- The `Obj` directory is the destination directory for the object files from the compiler and the assembler. These files have the extension `xxx` and will be used as input to the IAR XLINK Linker.
- The `Exe` directory is the destination directory for the executable file. It has the extension `dx` and will be used as input to the IAR C-SPY® Debugger. Note that this directory will be empty until you have linked the object files.

Click on the plus signs in the Workspace window to expand the view. As you can see, IAR Embedded Workbench has also created an output folder icon in the Workspace

window containing any generated output files. All included header files are displayed as well, showing the dependencies between the files.

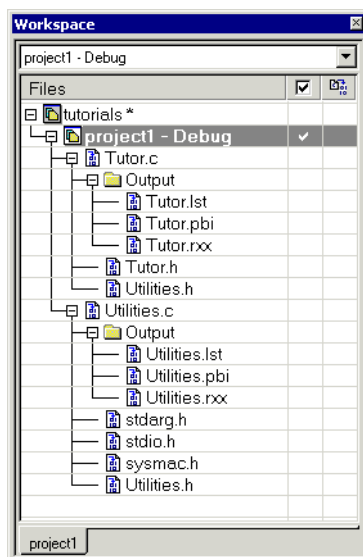


Figure 7: Workspace window after compilation

VIEWING THE LIST FILE

Now examine the compiler list file and notice how it is automatically updated when you, as in this case, will investigate how different optimization levels affect the generated code size.

- I Open the list file `Utilities.lst` by double-clicking it in the Workspace window. Examine the list file, which contains the following information:
 - The *header* shows the product version, information about when the file was created, and the command line version of the compiler options that were used
 - The *body* of the list file shows the assembler code and binary code generated for each statement. It also shows how the variables are assigned to different segments
 - The *end* of the list file shows the amount of stack, code, and data memory required, and contains information about error and warning messages that might have been generated.

Notice the amount of generated code at the end of the file and keep the file open.

- 2 Choose **Tools>Options** to open the **IDE Options** dialog box and click the **Editor** tab. Select the option **Scan for Changed Files**. This option turns on the automatic update of any file open in an editor window, such as a list file. Click the **OK** button.

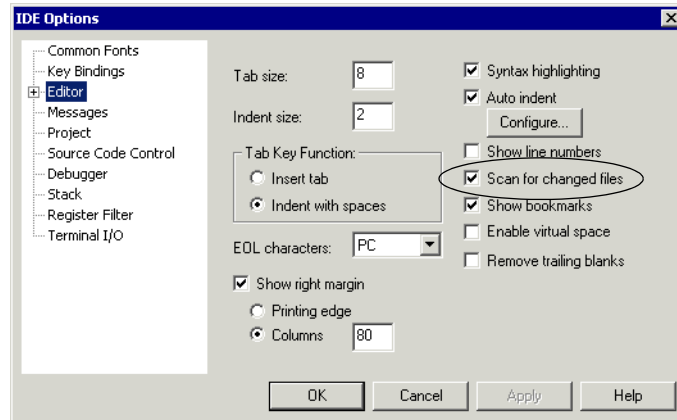


Figure 8: Setting the option Scan for Changed Files

- 3 Select the file `Utilities.c` in the Workspace window. Open the **C/C++ Compiler** options dialog box by right-clicking on the selected file in the Workspace window. Click the **Optimizations** tab and select the **Override inherited settings** option. Choose **High** from the **Optimizations** drop-down list. Click **OK**.

Notice that the options override on the file node is indicated in the Workspace window.

- 4 Compile the file `Utilities.c`. Now you will notice two things. First, note the automatic updating of the open list file due to the selected option **Scan for Changed Files**. Second, look at the end of the list file and notice the effect on the code size due to the increased optimization.
- 5 For this tutorial, the optimization level **None** should be used, so before linking the application, restore the default optimization level. Open the **C/C++ Compiler** options dialog box by right-clicking on the selected file in the Workspace window. Deselect the **Override inherited settings** option and click **OK**. Recompile the file `Utilities.c`.

LINKING THE APPLICATION

Now you should set up the options for the IAR XLINK Linker.

- 1 Select the project folder icon **project1 - Debug** in the Workspace window and choose **Project>Options**. Then select **Linker** in the **Category** list to display the XLINK option pages. For this tutorial, default factory settings are used. However, pay attention to the choice of output format and linker command file.

Output format

It is important to choose the output format that suits your purpose. You might want to load it to a debugger—which means that you need output with debug information. In this tutorial you will use the default output options suitable for the C-SPY debugger—**Debug information for C-SPY, With runtime control modules**, and **With I/O emulation modules**—which means that some low-level routines will be linked that direct `stdin` and `stdout` to the Terminal I/O window in the C-SPY Debugger. You find these options on the **Output** page.

Alternatively, in your real application project, you might want to load the output to a PROM programmer—in which case you need an output format without debug information, such as Intel-hex or Motorola S-records.

Linker command file

In the linker command file, the XLINK command line options for segment control are used for placing segments. It is important to be familiar with the linker command file and placement of segments. You can read more about this in the *IAR C/C++ Compiler Reference Guide*.

Note: The linker command file templates supplied with the product can be used as is in the simulator, but when using them for your target system you might have to adapt them to your actual hardware memory layout. You can find supplied linker command files in the `config` directory.

In this tutorial you will use the default linker command file, which you can see on the **Config** page.

If you want to examine the linker command file, use a suitable text editor, such as the IAR Embedded Workbench editor, or print a copy of the file, and verify that the definitions match your requirements.

Linker map file

By default no linker map file is generated. To generate a linker map file, click the **List** tab and select the options **Generate linker listing**, **Segment map**, and **Module map**.

- 2 Click **OK** to save the linker options.

Now you should link the object file, to generate code that can be debugged.

- 3** Choose **Project>Make**. The progress will as usual be displayed in the Build messages window. The result of the linking is a code file `project1.dxx` with debug information and a map file `project1.map`.

VIEWING THE MAP FILE

Examine the file `project1.map` to see how the segment definitions and code were placed in memory. These are the main points of interest in a map file:

- The header includes the options used for linking.
- The CROSS REFERENCE section shows the address of the program entry.
- The RUNTIME MODEL section shows the runtime model attributes that are used.
- The MODULE MAP shows the files that are linked. For each file, information about the modules that were loaded as part of your application, including segments and global symbols declared within each segment, is displayed.
- The SEGMENTS IN ADDRESS ORDER section lists all the segments that constitute your application.

The `project1.dxx` application is now ready to be run in the IAR C-SPY Debugger.

Debugging using the IAR C-SPY® Debugger

This chapter continues the development cycle started in the previous chapter and explores the basic features of the IAR C-SPY Debugger.

Note that, depending on what IAR product package you have installed, the IAR C-SPY Debugger may or may not be included. The tutorials assume that you are using the C-SPY Simulator.

Debugging the application

The `project1.dxx` application, created in the previous chapter, is now ready to be run in the IAR C-SPY Debugger where you can watch variables, set breakpoints, view code in disassembly mode, monitor registers and memory, and print the program output in the Terminal I/O window.

STARTING THE DEBUGGER

Before starting the IAR C-SPY Debugger you must set a few C-SPY options.

- 1 Choose **Project>Options** and then the **Debugger** category. On the **Setup** page, make sure that you have chosen **Simulator** from the **Driver** drop-down list and that **Run to main** is selected. Click **OK**.



- 2 Choose **Project>Debug**. Alternatively, click the **Debugger** button in the toolbar. The IAR C-SPY Debugger starts with the `project1.dxx` application loaded. In addition to the windows already opened in the Embedded Workbench, a set of C-SPY-specific windows are now available.

ORGANIZING THE WINDOWS

In the IAR Embedded Workbench IDE, you can *dock* windows at specific places, and organize them in tab groups. You can also make a window *floating*, which means it is always on top of other windows. If you change the size or position of a floating window, other currently open windows are not affected.



The status bar, located at the bottom of the Embedded Workbench main window, contains useful help about how to arrange windows. For further details, see *Organizing the windows on the screen*, page 71.

Make sure the following windows and window contents are open and visible on the screen: the Workspace window with the active build configuration **tutorials – project1**, the editor window with the source files `Tutor.c` and `Utilities.c`, and the Debug Log window.

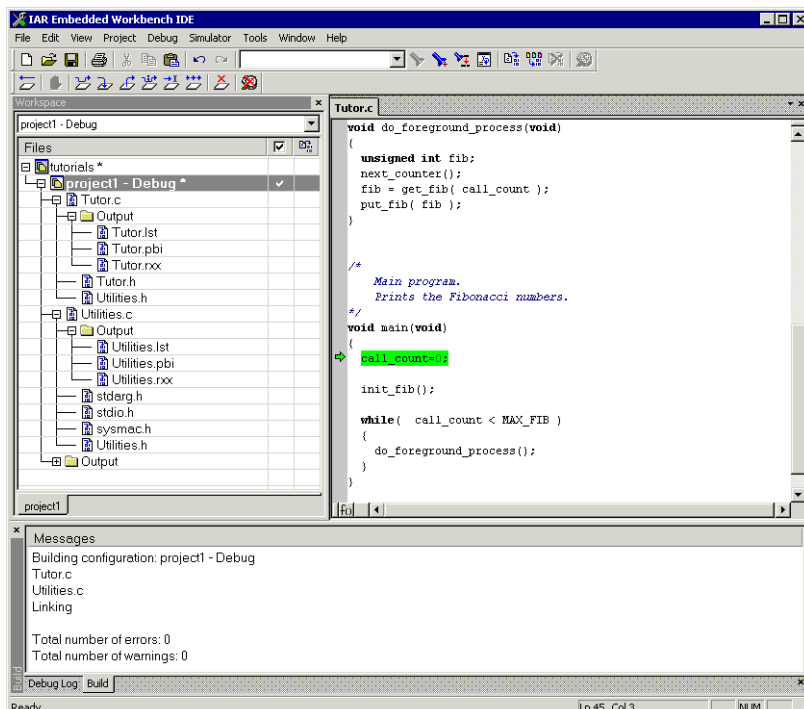


Figure 9: The C-SPY Debugger main window

INSPECTING SOURCE STATEMENTS

- 1 To inspect the source statements, double-click the file `Tutor.c` in the Workspace window.
- 2 With the file `Tutor.c` displayed in the editor window, first step over with the **Debug>Step Over** command.



Alternatively, click the **Step Over** button on the toolbar.

The current position should be the call to the `init_fib` function.

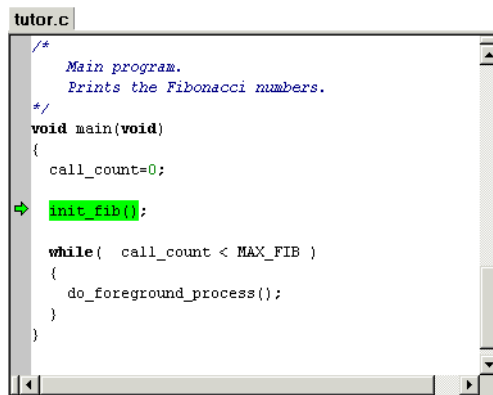


Figure 10: Stepping in C-SPY

- 3 Choose **Debug>Step Into** to step into the function `init_fib`.



Alternatively, click the **Step Into** button on the toolbar.

At source level, the **Step Over** and **Step Into** commands allow you to execute your application a statement at a time. **Step Into** continues stepping inside function or subroutine calls, whereas **Step Over** executes each function call in a single step. For further details, see *Step*, page 114.

When **Step Into** is executed you will notice that the active window changes to `Utilities.c` as the function `init_fib` is located in this file.

- 4 Use the **Step Into** command until you reach the `for` loop.

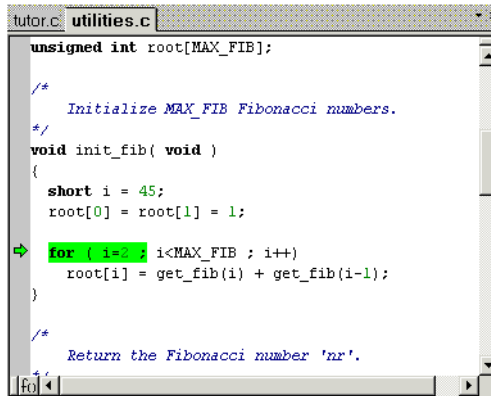


Figure 11: Using Step Into in C-SPY

- 5 Use **Step Over** until you are back in the header of the `for` loop. Notice that the step points are on a function call level, not on a statement level.



You can also step on a statement level. Choose **Debug>Next statement** to execute one statement at a time. Alternatively, click the **Next statement** button on the toolbar.

Notice how this command differs from the **Step Over** and the **Step Into** commands.

- 6 Debugging with C-SPY is usually quicker and more straightforward in C/C++ source mode. However, if you want to have full control over low-level routines, you can debug in disassembly mode where each step corresponds to one assembler instruction. C-SPY lets you switch freely between the two modes.

Choose **View>Disassembly** to open the Disassembly window, if it is not already open. You will see the assembler code corresponding to the current C statement.

Try the different step commands also in the Disassembly window.

INSPECTING VARIABLES


C-SPY allows you to watch variables or expressions in the source code, so that you can keep track of their values as you execute your application. You can look at a variable in a number of ways; for example by pointing at it in the source window with the mouse pointer, or by opening one of the Locals, Watch, Live Watch, or Auto windows. For more information about inspecting variables, see the chapter *Working with variables and expressions*.

Note: When optimization level **None** is used, all non-static variables will live during their entire scope and thus, the variables are fully debuggable. When higher levels of optimizations are used, variables might not be fully debuggable.

Using the Auto window

- 1 Choose **View>Auto** to open the Auto window.

The Auto window will show the current value of recently modified expressions.

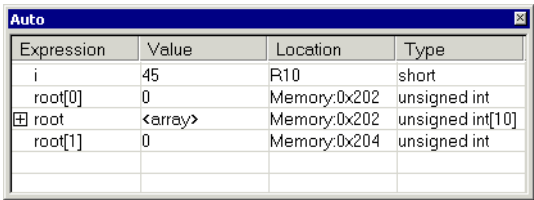The screenshot shows a window titled "Auto" with a table of variables. The table has four columns: Expression, Value, Location, and Type. The rows are: i (Value: 45, Location: R10, Type: short), root[0] (Value: 0, Location: Memory:0x202, Type: unsigned int), root (Value: <array>, Location: Memory:0x202, Type: unsigned int[10]), and root[1] (Value: 0, Location: Memory:0x204, Type: unsigned int).

Expression	Value	Location	Type
i	45	R10	short
root[0]	0	Memory:0x202	unsigned int
root	<array>	Memory:0x202	unsigned int[10]
root[1]	0	Memory:0x204	unsigned int

Figure 12: Inspecting variables in the Auto window

- 2 Keep stepping to see how the values change.

Setting a watchpoint

Next you will use the Watch window to inspect variables.

- 3 Choose **View>Watch** to open the Watch window. Notice that it is by default grouped together with the currently open Auto window; the windows are located as a *tab group*.
- 4 Set a watchpoint on the variable `i` using the following procedure: Click the dotted rectangle in the Watch window. In the entry field that appears, type `i` and press the Enter key.

You can also drag a variable from the editor window to the Watch window.

- 5 Select the `root` array in the `init_fib` function, then drag it to the Watch window.

The Watch window will show the current value of `i` and `root`. You can expand the `root` array to watch it in more detail.

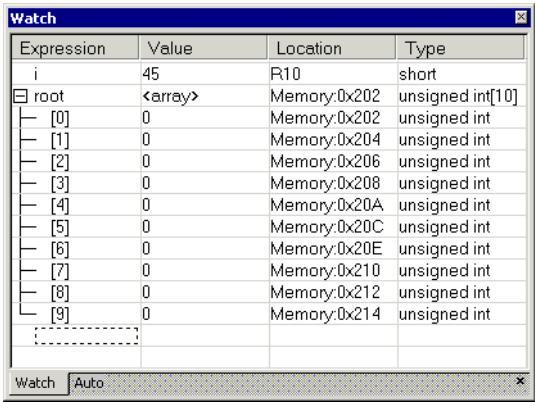


Figure 13: Watching variables in the Watch window

- 6 Execute some more steps to see how the values of `i` and `root` change.
- 7 To remove a variable from the Watch window, select it and press **Delete**.

SETTING AND MONITORING BREAKPOINTS

The IAR C-SPY Debugger contains a powerful breakpoint system with many features. For detailed information about the different breakpoints, see *The breakpoint system*, page 129.

The most convenient way is usually to set breakpoints interactively, simply by positioning the insertion point in or near a statement and then choosing the **Toggle Breakpoint** command.

- I Set a breakpoint on the statement `get_fib(i)` using the following procedure: First, click the `Utilities.c` tab in the editor window and click in the statement to position the insertion point. Then choose **Edit>Toggle Breakpoint**.



Alternatively, click the **Toggle Breakpoint** button on the toolbar.

A breakpoint will be set at this statement. The statement will be highlighted and there will be a **red dot** in the margin to show that there is a breakpoint there.

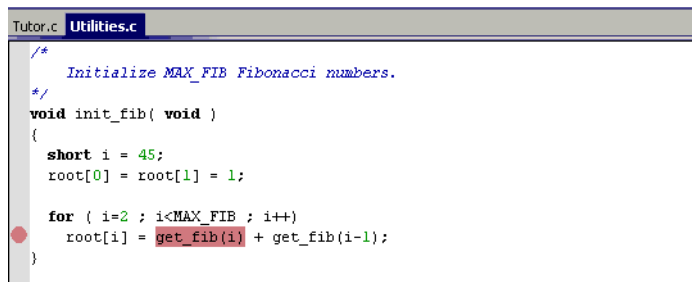


Figure 14: Setting breakpoints

To view all defined breakpoints, choose **View>Breakpoints** to open the Breakpoints window. You can find information about the breakpoint execution in the Debug Log window.

Executing up to a breakpoint

- 2 To execute your application until it reaches the breakpoint, choose **Debug>Go**.



Alternatively, click the **Go** button on the toolbar.

The application will execute up to the breakpoint you set. The Watch window will display the value of the `root` expression and the Debug Log window will contain information about the breakpoint.

- 3 Select the breakpoint and choose **Edit>Toggle Breakpoint** to remove the breakpoint.

MONITORING REGISTERS

The Register window lets you monitor and modify the contents of the processor registers.

- 1 Choose **View>Register** to open the Register window.

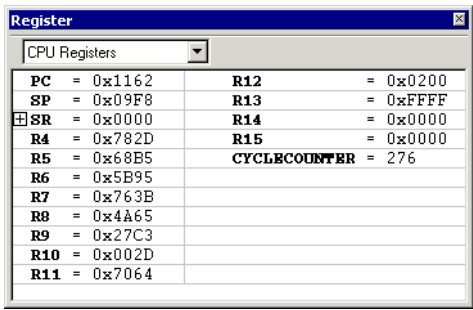


Figure 15: Register window

- 2 **Step Over** to execute the next instructions, and watch how the values change in the Register window.
- 3 Close the Register window.

MONITORING MEMORY

The Memory window lets you monitor selected areas of memory. In the following example, the memory corresponding to the variable `root` will be monitored.

- 1 Choose **View>Memory** to open the Memory window.
- 2 Make the Utilities.c window active and select `root`. Then drag it from the C source window to the Memory window.

The memory contents in the Memory window corresponding to `root` will be selected.

If not all of the memory units have been initialized by the `init_fib` function of the C application yet, continue to step over and you will notice how the memory contents will be updated.

You can change the memory contents by editing the values in the Memory window. Just place the insertion point at the memory content that you want to edit and type the desired value.

Close the Memory window.

VIEWING TERMINAL I/O

Sometimes you might need to debug constructions in your application that make use of `stdin` and `stdout` without the possibility of having hardware support. C-SPY lets you simulate `stdin` and `stdout` by using the Terminal I/O window.

Note: The Terminal I/O window is only available in C-SPY if you have linked your project using the output option **With I/O emulation modules**. This means that some low-level routines will be linked that direct `stdin` and `stdout` to the Terminal I/O window, see *Linking the application*, page 33.

- I Choose **View>Terminal I/O** to display the output from the I/O operations.

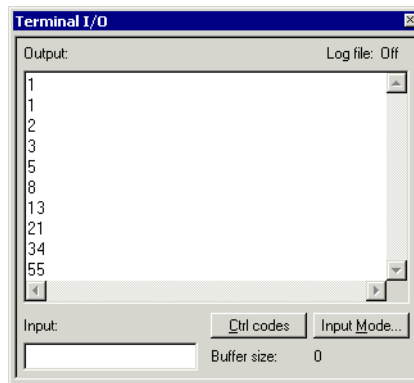


Figure 16: Output from the I/O operations

The contents of the window depends on how far you have executed the application.

REACHING PROGRAM EXIT

- I To complete the execution of your application, choose **Debug>Go**.



Alternatively, click the **Go** button on the toolbar.

As no more breakpoints are encountered, C-SPY reaches the end of the application and a program exit reached message is printed in the Debug Log window.

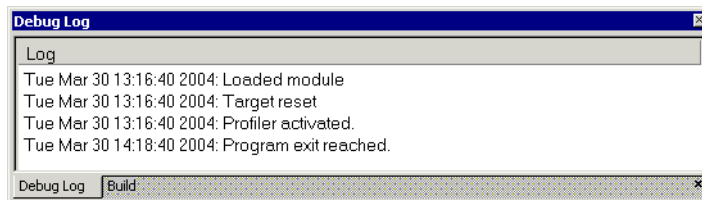


Figure 17: Reaching program exit in C-SPY

All output from the application has now been displayed in the Terminal I/O window.



If you want to start again with the existing application, choose **Debug>Reset**, or click the **Reset** button on the toolbar.

- 2 To exit from C-SPY, choose **Debug>Stop Debugging**. Alternatively, click the **Stop Debugging** button on the toolbar. The Embedded Workbench workspace is displayed.



C-SPY also provides many other debugging facilities. Some of these—for example macros and interrupt simulation—are described in the following tutorial chapters.

For further details about how to use C-SPY, see *Part 4. Debugging*. For reference information about the features of C-SPY, see *Part 6. Reference information* and the online help system.

Mixing C and assembler modules

In some projects it may be necessary to write certain pieces of source code in assembler language. The chapter first demonstrates how the compiler can be helpful in examining the calling convention, which you need to be familiar with when calling assembler modules from C/C++ modules or vice versa. Furthermore, this chapter demonstrates how you can easily combine source modules written in C with assembler modules, but the procedure is applicable to projects containing source modules written in C++, too, if your product version supports C++.

This tutorial assumes that you are familiar with the basics of the IAR Embedded Workbench® IDE described in the previous tutorial chapters.

Examining the calling convention

When writing an assembler routine that will be called from a C routine, it is necessary to be aware of the calling convention used by the compiler. By creating skeleton code in C and letting the compiler produce an assembler output file from it, you can study the produced assembler output file and find the details of the calling convention.

In this example you will make the compiler create an assembler output file from the file `Utilities.c`.

- 1** Create a new project in the workspace `tutorials` used in previous tutorials, and name the project `project2`.
- 2** Add the files `Tutor.c` and `Utilities.c` to the project.

To display an overview of the workspace, click the **Overview** tab available at the bottom of the Workspace window. To view only the newly created project, click the **project2** tab. For now, the **project2** view should be visible.
- 3** To set options, choose **Project>Options**, and select the **General Options** category. On project level, default factory settings should be used in this tutorial. Click **OK**.
- 4** To set options on file level node, in the Workspace window, select the file `Utilities.c`.

Choose **Project>Options**. You will notice that only the **C/C++ Compiler** and **Custom Build** categories are available.

- 5 In the **C/C++ Compiler** category, select **Override inherited settings** and verify the following settings:

Page	Option
Optimizations	Size: None (Best debug support)
List	Output assembler file Include source Include call frame information (deselected).

Table 3: Compiler options for project2

Note: In this example it is necessary to use a low optimization level when compiling the code to show local and global variable accesses. If a higher level of optimization is used, the required references to local variables can be removed. The actual function declaration is not changed by the optimization level.

- 6 Click **OK** and return to the Workspace window.
- 7 Compile the file `Utilities.c`. You can find the output file `Utilities.sxx` in the subdirectory `projects\debug\list`.
- 8 To examine the calling convention and to see how the C or C++ code is represented in assembler language, open the file `Utilities.sxx`.

You can now study where and how parameters are passed, how to return to the program location from where a function was called, and how to return a resulting value. You can also see which registers an assembler-level routine must preserve.

To obtain the correct interface for your own application functions, you should create skeleton code for each function that you need.

For more information about the calling convention used in the compiler, see the *IAR C/C++ Compiler Reference Guide*.

Adding an assembler module to the project

This tutorial demonstrates how you can easily create a project containing both assembler modules and C modules. You will also compile the project and view the assembler output list file.

SETTING UP THE PROJECT

- I Modify `project2` by adding the file `Utilities.sxx`.

Note: To view assembler files in the **Add files** dialog box, choose **Project>Add Files** and choose **Assembler Files** from the **Files of type** drop-down list.

- 2** Select the project level node in the Workspace window, choose **Project>Options**. Use the default settings in the **General Options**, **C/C++ Compiler**, and **Linker** categories. Select the **Assembler** category, click the **List** tab, and select the option **Output list file**.

Click **OK**.

- 3** Select the file `Utilities.sxx` in the Workspace window and choose **Project>Compile** to assemble it.

Assuming that the source file was assembled successfully, the file `Utilities.rxx` will be created, containing the linkable object code.

Viewing the assembler list file

- 4** Open the list file by double-clicking the file `Utilities.lst` available in the Output folder icon in the Workspace window.

The *end* of the file contains a summary of errors and warnings that were generated.

For further details of the list file format, see the *IAR Assembler Reference Guide*.

- 5** Choose **Project>Make** to relink `project2`.
- 6** Start C-SPY to run the `project2.dxx` application and see that it behaves like in the previous tutorial. Exit the debugger when you are done.

Using C++

In this chapter, C++ is used to create a C++ class. The class is then used for creating two independent objects, and the application is built and debugged. We also show an example of how to set a conditional breakpoint.

This tutorial assumes that you are familiar with the basics of the IAR Embedded Workbench® IDE described in the previous tutorial chapters.

Note that, depending on what IAR product package you have installed, support for C++ may or may not be included. This tutorial assumes that there is support for C++.

Creating a C++ application

This tutorial will demonstrate how to use the IAR Embedded Workbench C++ features. The tutorial consists of two files:

- `Fibonacci.cpp` creates a class `fibonacci` that can be used to extract a series of Fibonacci numbers
- `CPPtutor.cpp` creates two objects, `fib1` and `fib2`, from the class `fibonacci` and extracts two sequences of Fibonacci numbers using the `fibonacci` class.

To demonstrate that the two objects are independent of each other, the numbers are extracted at different speeds. A number is extracted from `fib1` each turn in the loop while a number is extracted from `fib2` only every second turn.

The object `fib1` is created using the default constructor while the definition of `fib2` uses the constructor that takes an integer as its argument.

COMPILING AND LINKING THE C++ APPLICATION

- 1 In the workspace `tutorials` used in the previous chapters, create a new project, `project3`.
- 2 Add the files `Fibonacci.cpp` and `CPPtutor.cpp` to `project3`.
- 3 Choose **Project>Options** and make sure default factory settings are used.

Note: For this application, the default stack size might be too small. For further information about the required settings, see the `CPPtutor.cpp` file.

In addition to the default settings, you need to switch to the C++ programming language, which is supported by the IAR DLIB Library. To use a DLIB library, choose the **General Options** category and click the **Library Configuration** tab. From the **Library** drop-down list, choose **Normal DLIB**.

To switch to the C++ programming language, choose the **C/C++ Compiler** category and click the **Language** tab. Choose **Embedded C++**.

To read more about the IAR DLIB Library and the C++ support, see the *IAR C/C++ Compiler Reference Guide*.

- 4 Choose **Project>Make** to compile and link your application.



Alternatively, click the **Make** button on the toolbar. The **Make** command compiles and links those files that have been modified.

- 5 Choose **Project>Debug** to start the IAR C-SPY® Debugger.

SETTING A BREAKPOINT AND EXECUTING TO IT

- 1 Open the CPPtutor.cpp window if it is not already open.
- 2 To see how the object is constructed, set a breakpoint on the C++ object `fib1` on the following line:

```
fibonacci fib1;
```

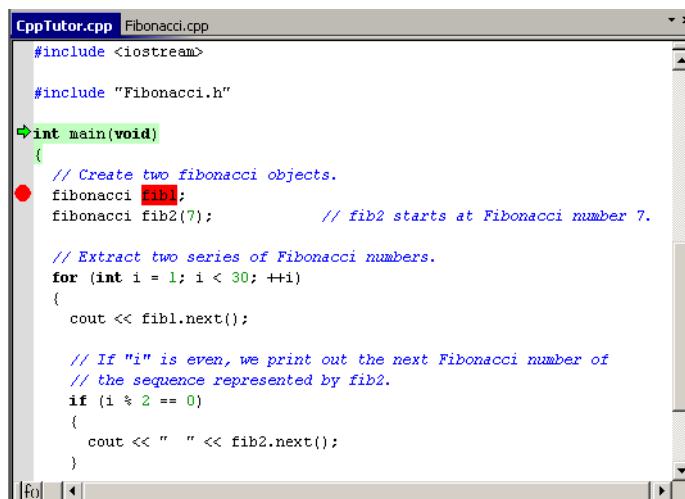


Figure 18: Setting a breakpoint in CPPtutor.cpp

- 3 Choose **Debug>Go**, or click the **Go** button on the toolbar.

The cursor should now be placed at the breakpoint.

- 4 To step into the constructor, choose **Debug>Step Into** or click the **Step Into** button in the toolbar. Then click **Step Out** again.

- 5 **Step Over** until the line:

```
cout << fib1.next();
```

Step Into until you are in the function `next` in the file `Fibonacci.cpp`.

- 6 Use the **Go to function** button in the lower left corner of the editor window to find and go to the function `nth` by double-clicking the function name. Set a breakpoint on the function call `nth(n-1)` at the line



```
value = nth(n-1) + nth(n-2);
```

- 7 It can be interesting to backtrace the function calls a few levels down and to examine the value of the parameter for each function call. By adding a condition to the breakpoint, the break will not be triggered until the condition is true, and you will be able to see each function call in the Call Stack window.

To open the Breakpoints window, choose **View>Breakpoints**. Select the breakpoint in the Breakpoints window, right-click to open the context menu, and choose **Edit** to open the **Edit Breakpoints** dialog box. Set the value in the **Skip count** text box to 4 and click **OK**.

Close the dialog box.

Looking at the function calls

- 8 Choose **Debug>Go** to execute the application until the breakpoint condition is fulfilled.
- 9 When C-SPY stops at the breakpoint, choose **View>Call Stack** to open the Call Stack window.

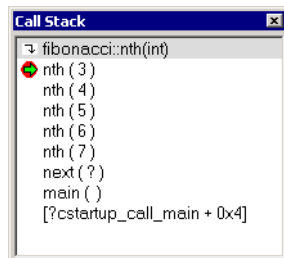


Figure 19: Inspecting the function calls

There are five instances of the function `nth` displayed on the call stack. Because the Call Stack window displays the values of the function parameters, you can see the different values of `n` in the different function instances.

You can also open the Register window to see how it is updated as you trace the function calls by double-clicking on the function instances.

PRINTING THE FIBONACCI NUMBERS

- 1 Open the Terminal I/O window from the **View** menu.
- 2 Remove the breakpoints and run the application to the end and verify the Fibonacci sequences being printed.

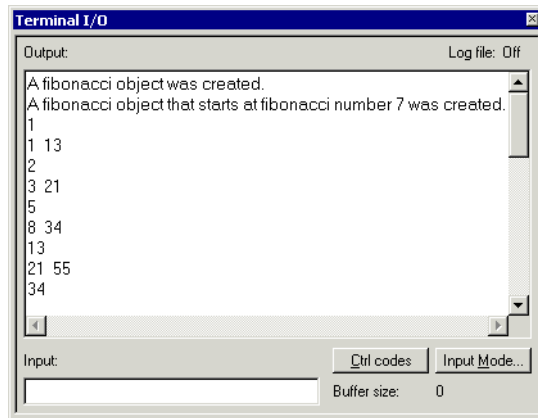


Figure 20: Printing Fibonacci sequences

Simulating an interrupt

In this tutorial an interrupt handler for a serial port is added to the project. The Fibonacci numbers will be read from an on-chip communication peripheral device (UART).

This tutorial will show how the IAR C/C++ Compiler interrupt keyword and the `#pragma vector` directive can be used. The tutorial will also show how an interrupt can be simulated using the features that support interrupts, breakpoints, and macros. Notice that this example does not describe an exact simulation; the purpose is to illustrate a situation where C-SPY® macros, breakpoints, and the interrupt system can be useful to simulate hardware.

This tutorial assumes that you are familiar with the basics of the IAR Embedded Workbench® IDE described in the previous tutorial chapters.

Note that interrupt simulation is possible only when you are using the IAR C-SPY Simulator.

Adding an interrupt handler

This section will demonstrate how to write an interrupt in an easy way. It starts with a brief description of the application used in this project, followed by a description of how to set up the project.

THE APPLICATION—A BRIEF DESCRIPTION

The interrupt handler will read values from the serial communication port receive register (UART), `RBUF`. It will then print the value. The main program enables interrupts and starts printing periods (.) in the foreground process while waiting for interrupts.

Note: In this tutorial, the serial communication port UART and the receive buffer register `RBUF` are symbolic names. To follow this tutorial and simulate the interrupt in the C-SPY simulator, you should instead use names that are suitable for your target system. See the `Interrupt.c` file in the `cpuname\tutor` directory.

WRITING AN INTERRUPT HANDLER

The following lines define the interrupt handler used in this tutorial (the complete source code can be found in the file `Interrupt.c` supplied in the `cpuname\tutor` directory):

```
/* define the interrupt handler */
#pragma vector=UARTR_VECTOR
__interrupt void uartRecieveHandler( void )
```

The `#pragma vector` directive is used for specifying the interrupt vector address—in this case the interrupt vector for the UART receive interrupt—and the keyword `__interrupt` is used for directing the compiler to use the calling convention needed for an interrupt function.

Note: In this tutorial, the name of the vector is symbolic. To follow this tutorial and simulate the interrupt in the C-SPY simulator, you should instead use a name that is suitable for your target system. See the `Interrupt.c` file in the `cpuname\tutor` directory.

For detailed information about the extended keywords and pragma directives used in this tutorial, see the *IAR C/C++ Compiler Reference Guide*.

SETTING UP THE PROJECT

- 1 Add a new project—`project4`—to the workspace `tutorials` used in previous tutorials.
- 2 Add the files `Utilities.c` and `Interrupt.c` to it.
- 3 In the Workspace window, select the project level node and choose **Project>Options**. Select the **General Options** category, and click the **Target** tab. Choose **ARM7TDMI** from the **Core** drop-down menu.

In addition, make sure the factory settings are used in the **C/C++ Compiler** and **Linker** categories. Make sure default factory settings are used in the **General Options**, **C/C++ Compiler**, and **Linker** categories.

Note: The file `Interrupt.c` might specify any specific settings required.

Next you will set up the simulation environment.

Setting up the simulation environment

The C-SPY interrupt system is based on the cycle counter. You can specify the amount of cycles to pass before C-SPY generates an interrupt.

To simulate the input to UART, values will be read from the file `InputData.txt`, which contains the Fibonacci series. You will set an *immediate read breakpoint* on the

UART receive register, `RBUF`, and connect a user-defined macro function to it (in this example the `Access` macro function). The macro reads the Fibonacci values from the text file.

Whenever an interrupt is generated, the interrupt routine will read `RBUF` and the breakpoint will be triggered, the `Access` macro function will be executed and the Fibonacci values will be fed into the UART receive register.

The immediate read breakpoint will trigger the break *before* the processor reads the `RBUF` register, allowing the macro to store a new value in the register that is immediately read by the instruction.

This section will demonstrate the steps involved in setting up the simulator for simulating a serial port interrupt. The steps involved are:

- Defining a C-SPY setup file which will open the file `InputData.txt` and define the `Access` macro function
- Specifying C-SPY options
- Building the project
- Starting the simulator
- Specifying the interrupt request
- Setting the breakpoint and associating the `Access` macro function to it.

Note: For a simple example of a system timer interrupt simulation, see *Simulating a simple interrupt*, page 186.

DEFINING A C-SPY SETUP MACRO FILE

In C-SPY, you can define setup macros that will be registered during the C-SPY startup sequence. In this tutorial you will use the C-SPY macro file `SetupSimple.mac`, available in the `cpuname\tutor` directory. It is structured as follows:

First the setup macro function `execUserSetup` is defined, which is automatically executed during C-SPY setup. Thus, it can be used to set up the simulation environment automatically. A message is printed in the Log window to confirm that this macro has been executed:

```
execUserSetup()
{
    __message "execUserSetup() called\n";
```

Then the file `InputData.txt`, which contains the Fibonacci series to be fed into UART, will be opened:

```
    _fileHandle = __openFile(
        "$TOOLKIT_DIR$\tutor\InputData.txt", "r" );
```

After that, the macro function `Access` is defined. It will read the Fibonacci values from the file `InputData.txt`, and assign them to the receive register address:

```
Access()
{
    __message "Access() called\n";
    __var _fibValue;
    if( 0 == __readFile( _fileHandle, &_fibValue ) )
    {
        RBUF = _fibValue;
    }
}
```

You will have to connect the `Access` macro to an immediate read breakpoint. However, this will be done at a later stage in this tutorial.

Finally, the file contains two macro functions for managing correct file handling at reset and exit.

For detailed information about macros, see the chapters *Using the C-SPY® macro system* and *C-SPY® macros reference*.

Next you will specify the macro file and set the other C-SPY options needed.

SPECIFYING C-SPY OPTIONS

- 1 To select C-SPY options, choose **Project>Options**. In the **Debugger** category, click the **Setup** tab.
- 2 Use the **Use macro file** browse button to specify the macro file to be used:

```
SetupSimple.mac
```

Alternatively, use an argument variable to specify the path:

```
$TOOLKIT_DIR$\tutor\SetupSimple.mac
```

See *Argument variables summary*, page 233, for details.

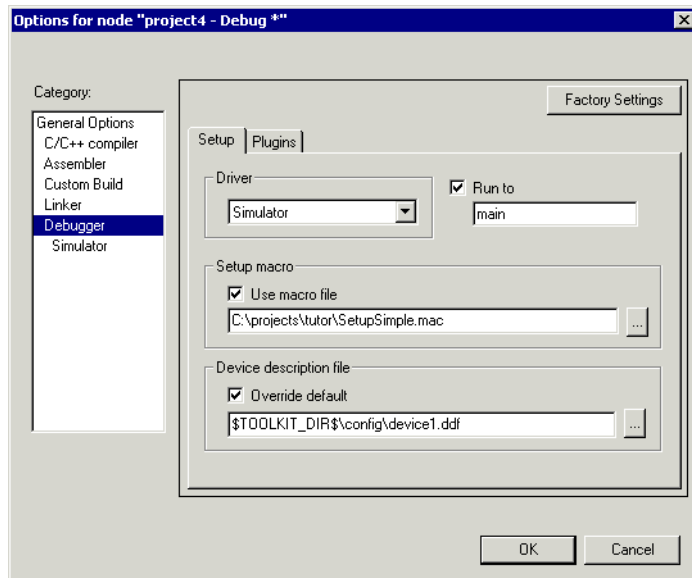


Figure 21: Specifying setup macro file

- 3 The C-SPY interrupt system requires some interrupt definitions, provided by the device description files. With the **Device description file** option you can specify the appropriate file. In this tutorial, use the default file.
- 4 Select **Run to main** and click **OK**. This will ensure that the debug session will start by running to the `main` function.

The project is now ready to be built.

BUILDING THE PROJECT

- 1 Compile and link the project by choosing **Project>Make**.



Alternatively, click the **Make** button on the toolbar. The **Make** command compiles and links those files that have been modified.

STARTING THE SIMULATOR



- 1 Start the IAR C-SPY Debugger to run the `project4` project.

The `Interrupt.c` window is displayed (among other windows). Click in it to make it the active window.

- 2 Examine the Log window. Note that the macro file has been loaded and that the `execUserSetup` function has been called.

SPECIFYING A SIMULATED INTERRUPT

Now you will specify your interrupt to make it simulate an interrupt every 2000 cycles.

- I Choose **Simulator>Interrupt Setup** to display the **Interrupt Setup** dialog box. Click **New** to display the **Edit Interrupt** dialog box and make the following settings for your interrupt:

Setting	Value	Description
Interrupt	UARTR_VECTOR	Specifies which interrupt to use
Description	As is	The interrupt definition that the simulator uses to be able to simulate the interrupt correctly.
First activation	4000	Specifies the first activation moment for the interrupt. The interrupt is activated when the cycle counter has passed this value.
Repeat Interval	2000	Specifies the repeat interval for the interrupt, measured in clock cycles.
Hold time	Infinite	Hold time, not used here.
Probability %	100	Specifies probability. 100% specifies that the interrupt will occur at the given frequency. Another percentage might be used for simulating a more random interrupt behavior.
Variance %	0	Time variance, not used here.

Table 4: Interrupts dialog box

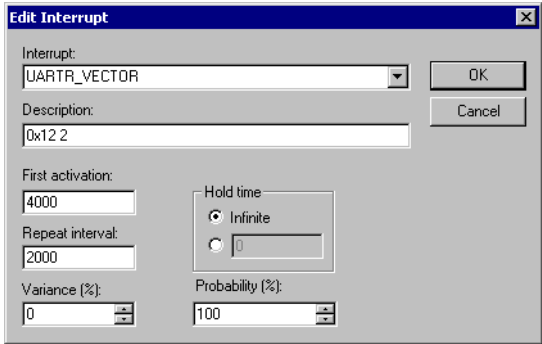


Figure 22: Inspecting the interrupt settings

During execution, C-SPY will wait until the cycle counter has passed the activation time. When the current assembler instruction is executed, C-SPY will generate an interrupt which is repeated approximately every 2000 cycles.

- 2 When you have specified the settings, click **OK** to close the **Edit Interrupt** dialog box, and then click **OK** to close the **Interrupt Setup** dialog box.

For information about how you can use the system macro `__orderInterrupt` in a C-SPY setup file to automate the procedure of defining the interrupt, see *Using macros for interrupts and breakpoints*, page 61.

SETTING AN IMMEDIATE BREAKPOINT

By defining a macro and connecting it to an immediate breakpoint, you can make the macro simulate the behavior of a hardware device, for instance an I/O port, as in this tutorial. The immediate breakpoint will not halt the execution, only temporarily suspend it to check the conditions and execute any connected macro.

In this example, the input to the UART is simulated by setting an immediate read breakpoint on the `RBUF` address and connecting the defined `Access` macro to it. The macro will simulate the input to the UART. These are the steps involved:

- 1 Choose **View>Breakpoints** to open the Breakpoints window, right-click to open the context menu, choose **New Breakpoint>Immediate** to open the **Immediate** tab.
- 2 Add the following parameters for your breakpoint.

Setting	Value	Description
Break at	RBUF	Receive buffer address.
Access Type	Read	The breakpoint type (Read or Write)
Action	Access ()	The macro connected to the breakpoint.

Table 5: Breakpoints dialog box

During execution, when C-SPY detects a read access from the `RBUF` address, C-SPY will temporarily suspend the simulation and execute the `Access` macro. The macro will read a value from the file `InputData.txt` and write it to `RBUF`. C-SPY will then resume the simulation by reading the receive buffer value in `RBUF`.

- 3 Click **OK** to close the breakpoints dialog box.

For information about how you can use the system macro `__setSimBreak` in a C-SPY setup file to automate the breakpoint setting, see *Using macros for interrupts and breakpoints*, page 61.

Simulating the interrupt

In this section you will execute your application and simulate the serial port interrupt.

EXECUTING THE APPLICATION

- 1 Step through the application and stop when it reaches the `while` loop, where the application waits for input.
- 2 In the `Interrupt.c` source window, locate the function `uartReceiveHandler`.
- 3 Place the insertion point on the `++callCount;` statement in this function and set a breakpoint by choosing **Edit>Toggle Breakpoint**, or click the **Toggle Breakpoint** button on the toolbar. Alternatively, use the context menu.

If you want to inspect the details of the breakpoint, choose **Edit>Breakpoints**.

- 4 Open the Terminal I/O window and run your application by choosing **Debug>Go** or clicking the **Go** button on the toolbar.

The application should stop in the interrupt function.

- 5 Click **Go** again in order to see the next number being printed in the Terminal I/O window.

Because the main program has an upper limit on the Fibonacci value counter, the tutorial application will soon reach the `exit` label and stop.

The Terminal I/O window will display the Fibonacci series.

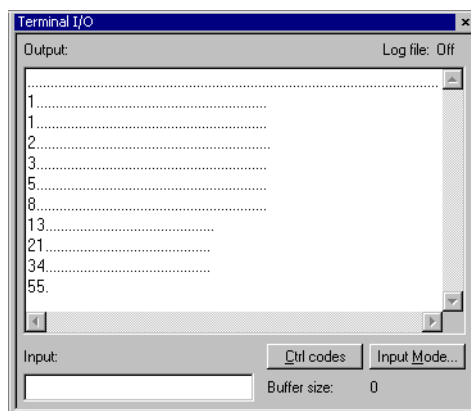


Figure 23: Printing the Fibonacci values in the Terminal I/O window

Using macros for interrupts and breakpoints

To automate the setting of breakpoints and the procedure of defining interrupts, the system macros `__setSimBreak` and `__orderInterrupt`, respectively, can be executed by the setup macro `execUserSetup`.

The file `SetupAdvanced.mac` is extended with system macro calls for setting the breakpoint and specifying the interrupt:

```
SimulationSetup()
{...
    _interruptID = __orderInterrupt( "UARTR_VECTOR", 4000,
                                    2000, 0, 1, 0, 100 );

    if( -1 == _interruptID )
    {
        __message "ERROR: failed to order interrupt";
    }

    _breakID = __setSimBreak( "RBUF", "R", "Access()" );
}
```

By replacing the file `SetupSimple.mac`, used in the previous tutorial, with the file `SetupAdvanced.mac`, setting the breakpoint and defining the interrupt will be automatically performed at C-SPY startup. Thus, you do not need to start the simulation by manually filling in the values in the **Interrupts** and **Breakpoints** dialog boxes.

Note: Before you load the file `SetupAdvanced.mac` you should remove the previously defined breakpoint and interrupt.

Creating and using libraries

This tutorial demonstrates how to create a library project and how you can combine it with an application project.

This tutorial assumes that you are familiar with the basics of the IAR Embedded Workbench® IDE described in the previous tutorial chapters.

Using libraries

If you are working on a large project you will soon accumulate a collection of useful modules containing one or more routines that can be used by several of your applications. To avoid having to assemble or compile a module each time it is needed, you can store such modules as object files, that is, assembled or compiled but not linked.

You can collect many modules in a single object file which then is referred to as a *library*. It is recommended that you use library files to create collections of related routines, such as a device driver.

Use the IAR XAR Library Builder to build libraries.

The Main.sxx program

The `Main.sxx` program uses a routine called `max` to set the contents of one register to the maximum value of two other registers. The `EXTERN` directive declares `max` as an external symbol, to be resolved at link time.

A copy of the program is provided in the `cpuname\tutor` directory.

The library routines

The two library routines will form a separately assembled library. It consists of the `max` routine called by `main`, and a corresponding `min` routine, both of which operate on the contents of the registers used in the `Main.sxx` program. The file containing these library routines is called `Maxmin.sxx`, and a copy is provided with the product.

The routines are defined as library modules by the `MODULE` directive, which instructs the IAR XLINK Linker to include the modules only if they are referenced by another module.

The `PUBLIC` directive makes the `max` and `min` symbols public to other modules.

For detailed information about the `MODULE` and `PUBLIC` directives, see the *IAR Assembler Reference Guide*.

CREATING A NEW PROJECT

- 1 In the workspace `tutorials` used in previous chapters, add a new project called `project5`.
- 2 Add the file `Main.sxx` to the new project.
- 3 To set options, choose **Project>Options**. Select the **General Options** category and click the **Library Configuration** tab. Choose **None** from the **Library** drop-down list, which means that a standard C/C++ library will not be linked.

The default options are used for the other option categories.

- 4 To assemble the file `Main.sxx`, choose **Project>Compile**.



You can also click the **Compile** button on the toolbar.

CREATING A LIBRARY PROJECT

Now you are ready to create a library project.

- 1 In the same workspace `tutorials`, add a new project called `tutor_library`.
- 2 Add the file `Maxmin.sxx` to the project.
- 3 To set options, choose **Project>Options**. In the **General Options** category, verify the following settings:

Page	Option
Output	Output file: Library
Library Configuration	Library: None

Table 6: General options for a library project

Note that **Library Builder** appears in the list of categories, which means that the IAR XAR Library Builder is added to the build tool chain. It is not necessary to set any XAR-specific options for this tutorial.

Click **OK**.

- 4 Choose **Project>Make**.

The library output file `tutor_library.rxx` has now been created.

USING THE LIBRARY IN YOUR APPLICATION PROJECT

You can now add your library containing the maxmin routine to `project5`.

- 1 In the Workspace window, click the **project5** tab. Choose **Project>Add Files** and add the file `tutor_library.rxx` located in the `projects\Debug\Exe` directory. Click **Open**.




- 2 Click **Make** to build your project.
- 3 You have now combined a library with an executable project, and the application is ready to be executed. For information about how to manipulate the library, see the *IAR Linker and Library Tools Reference Guide*.

Part 3. Project management and building

This part of the IAR Embedded Workbench® IDE User Guide contains the following chapters:

- The development environment
- Managing projects
- Building
- Editing.





The development environment

This chapter introduces you to the IAR Embedded Workbench® development environment (IDE). The chapter also demonstrates how you can customize the environment to suit your requirements.

The IAR Embedded Workbench IDE

THE TOOL CHAIN

The IAR Embedded Workbench IDE is the framework where all necessary tools—the *tool chain*—are seamlessly integrated: a C/C++ compiler, an assembler, the IAR XLINK Linker, the IAR XAR Library Builder, the IAR XLIB Librarian, an editor, a project manager with Make utility, and the IAR C-SPY® Debugger, which is a high-level language debugger. The tools used specifically for building your source code are referred to as the *build tools*.

The tool chain that comes with your product installation is adapted for a certain microcontroller. However, the IAR Embedded Workbench IDE can simultaneously manage multiple tool chains for various microcontrollers.

You can also add IAR visualSTATE to the tool chain, which means that you can add state machine diagrams directly to your project in the IAR Embedded Workbench IDE.

You can use the Custom Build mechanism to incorporate also other tools to the tool chain, see *Extending the tool chain*, page 89.

The compiler, assembler, and linker can also be run from a command line environment, if you want to use them as external tools in an already established project environment.

This illustration shows the IAR Embedded Workbench IDE window with different components.

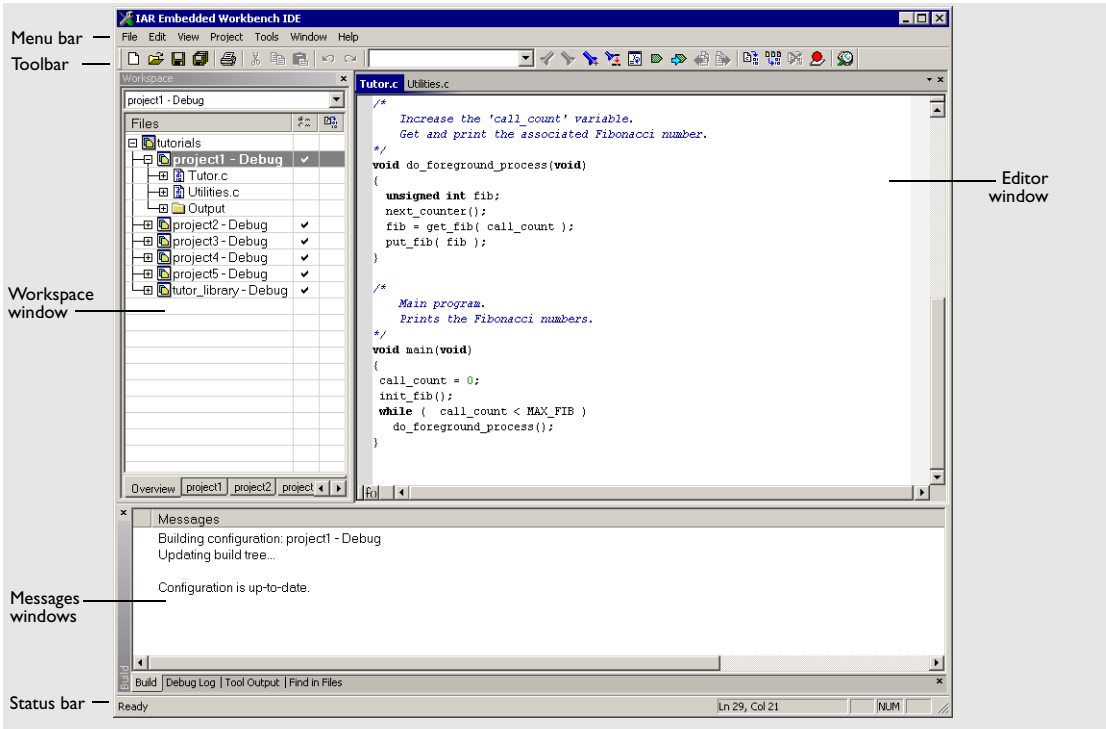


Figure 24: IAR Embedded Workbench IDE window

The window might look different depending on what additional tools you are using.

RUNNING THE IAR EMBEDDED WORKBENCH IDE

Click the **Start** button on the taskbar and choose **All Programs>IAR Systems>IAR Embedded Workbench for chip manufacturer CPUNAME>IAR Embedded Workbench**.

The file `IarIdePm.exe` is located in the `common\bin` directory under your IAR installation, in case you want to start the program from the command line or from within Windows Explorer.

Double-clicking the workspace filename

The workspace file has the filename extension `.eww`. If you double-click a workspace filename, the IAR Embedded Workbench IDE starts. If you have several versions of IAR Embedded Workbench installed, the workspace file will be opened by the most recently used version of your IAR Embedded Workbench that uses that file type.

EXITING

To exit the IAR Embedded Workbench IDE, choose **File>Exit**. You will be asked whether you want to save any changes to editor windows, the projects, and the workspace before closing them.

Customizing the environment

The IAR Embedded Workbench IDE is a highly customizable environment. This section demonstrates how you can work with and organize the windows on the screen, the possibilities for customizing the IDE, and how you can set up the environment to communicate with external tools.

ORGANIZING THE WINDOWS ON THE SCREEN

In the IAR Embedded Workbench IDE, you can position the windows and arrange a layout according to your preferences. You can *dock* windows at specific places, and organize them in tab groups. You can also make a window *floating*, which means it is always on top of other windows. If you change the size or position of a floating window, other currently open windows are not affected.

Each time you open a previously saved workspace, the same windows are open, and they have the same sizes and positions.

For every project that is executed in the C-SPY environment, a separate layout is saved. In addition to the information saved for the workspace, information about all open debugger-specific windows is also saved.

Using docked versus floating windows

Each window that you open has a default location, which depends on other currently open windows. To give you full and convenient control of window placement, each window can either be docked or floating.

A docked window is locked to a specific area in the Embedded Workbench main window, which you can decide. To keep many windows open at the same time, you can organize the windows in tab groups. This means one area of the screen is used for several concurrently open windows. The system also makes it easy to rearrange the size of the

windows. If you rearrange the size of one docked window, the sizes of any other docked windows are adjusted accordingly.

A floating window is always on top of other windows. Its location and size does not affect other currently open windows. You can move a floating window to any place on your screen, also outside of the IAR Embedded Workbench IDE main window.

Note: The editor window is always docked. When you open the editor window, its placement is decided automatically depending on other currently open windows. For more information about how to work with the editor window, see *Using the IAR Embedded Workbench editor*, page 93.

Organizing windows

To place a window as a *separate* window, drag it next to another open window.

To place a window in the same tab group as another open window, drag the window you want to locate to the middle of the area and drop the window.

To make a window floating, double-click on the window's title bar.



The status bar, located at the bottom of the IAR Embedded Workbench IDE main window, contains useful help about how to arrange windows.

CUSTOMIZING THE IDE

To customize the IDE, choose **Tools>Options** to get access to a wide variety of commands for:

- Configuring the editor
- Configuring the editor colors and fonts
- Configuring the project build command
- Organizing the windows in C-SPY
- Using an external editor
- Changing common fonts
- Changing key bindings
- Configuring the amount of output to the Messages window.

In addition, you can increase the number of recognized filename extensions. By default, each tool in the build tool chain accepts a set of standard filename extensions. If you have source files with a different filename extension, you can modify the set of accepted filename extensions. Choose **Tools>Filename Extensions** to get access to the necessary commands.

For reference information about the commands for customizing the IDE, see *Tools menu*, page 240. You can also find further information related to customizing the editor

in the section *Customizing the editor environment*, page 100. For further information about customizations related to C-SPY, see *Part 4. Debugging*.

INVOKING EXTERNAL TOOLS

The **Tools** menu is a configurable menu to which you can add external tools for convenient access to these tools from within the IAR Embedded Workbench IDE. For this reason, the menu might look different depending on which tools you have preconfigured to appear as menu commands.

To add an external tool to the menu, choose **Tools>Configure Tools** to open the **Configure Tools** dialog box.

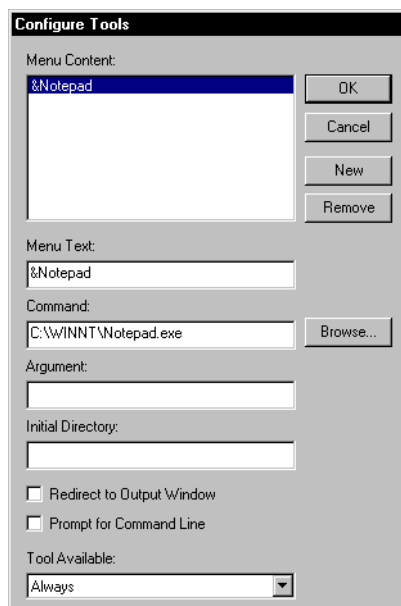


Figure 25: *Configure Tools* dialog box

For reference information about this dialog box, see *Configure Tools dialog box*, page 261.

Note: It is not possible to use the **Configure Tools** dialog box to extend the tool chain in the IAR Embedded Workbench IDE, see *The tool chain*, page 69.

After you have entered the appropriate information and clicked **OK**, the menu command you have specified is displayed on the **Tools** menu.




Figure 26: Customized Tools menu

Note: If you intend to add an external tool to the standard build tool chain, see *Extending the tool chain*, page 89.

Adding command line commands

Command line commands and calls to batch files must be run from a command shell. You can add command line commands to the **Tools** menu and execute them from there.

- 1 To add commands to the **Tools** menu, you must specify an appropriate command shell.

Type one of the following command shells in the **Command** text box:

System	Command shell
Windows 2000/XP/Vista	cmd.exe (recommended) or command.com

Table 7: Command shells

- 2 Specify the command line command or batch file name in the **Argument** text box.

The **Argument** text should be specified as:

`/C name`

where *name* is the name of the command or batch file you want to run.

The `/C` option terminates the shell after execution, to allow the IAR Embedded Workbench IDE to detect when the tool has finished.

Example

To add the command **Backup** to the **Tools** menu to make a copy of the entire project directory to a network drive, you would specify **Command** either as `command.cmd` or as `cmd.exe` depending on your host environment, and **Argument** as:

`/C copy c:\project*.* F:`

Alternatively, to use a variable for the argument to allow relocatable paths:

`/C copy $PROJ_DIR$ *.* F:`

Managing projects

This chapter discusses the project model used by the IAR Embedded Workbench IDE. It covers how projects are organized and how you can specify workspaces with multiple projects, build configurations, groups, source files, and options that help you handle different versions of your applications. The chapter also describes the steps involved in interacting with an external third-party source code control system.

The project model

In a large-scale development project, with hundreds of files, you must be able to organize the files in a structure that is easily navigated and maintained by perhaps several engineers involved.

The IAR Embedded Workbench IDE is a flexible environment for developing projects also with a number of different target processors in the same project, and a selection of tools for each target processor.

HOW PROJECTS ARE ORGANIZED

The IAR Embedded Workbench IDE has been designed to suit the way that software development projects are typically organized. For example, perhaps you need to develop related versions of an application for different versions of the target hardware, and you might also want to include debugging routines into the early versions, but not in the final application.

Versions of your applications for different target hardware will often have source files in common, and you might want to be able to maintain only one unique copy of these files, so that improvements are automatically carried through to each version of the application. Perhaps you also have source files that differ between different versions of the application, such as those dealing with hardware-dependent aspects of the application.

The IAR Embedded Workbench IDE allows you to organize projects in a hierarchical tree structure showing the logical structure at a glance. In the following sections the different levels of the hierarchy are described.

Projects and workspaces

Typically you create a *project* which contains the source files needed for your embedded systems application. If you have several related projects, you can access and work with them simultaneously. To achieve this, you can organize related projects in *workspaces*.

Each workspace you define can contain one or more projects, and each project must be part of at least one workspace.

Consider this example: two related applications—for instance A and B—will be developed, requiring one development team each (team A and B). Because the two applications are related, parts of the source code can be shared between the applications. The following project model can be applied:

- Three projects—one for each application, and one for the common source code
- Two workspaces—one for team A and one for team B.

It is both convenient and efficient to collect the common sources in a library project (compiled but not linked object code), to avoid having to compile it unnecessarily.

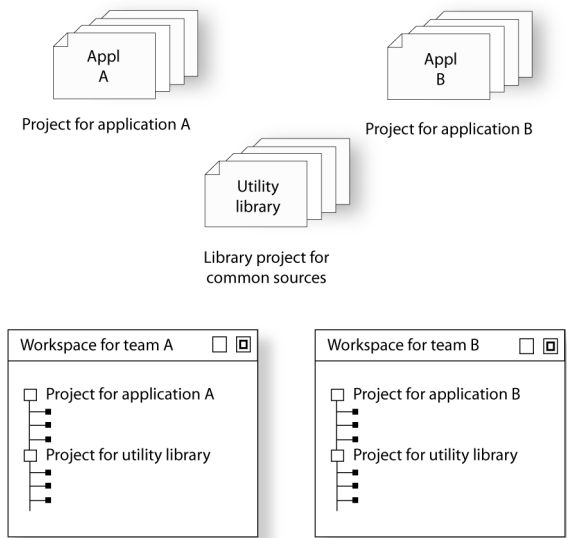


Figure 27: Examples of workspaces and projects

For an example where a library project has been combined with an application project, see the chapter *Creating and using libraries* in *Part 2. Tutorials*.

Projects and build configurations

Often, you need to build several versions of your project. The Embedded Workbench lets you define multiple build configurations for each project. In a simple case, you might need just two, called **Debug** and **Release**, where the only differences are the options used for optimization, debug information, and output format. In the Release configuration, the preprocessor symbol `NDEBUG` is defined, which means the application will not contain any asserts.

Additional build configurations can be useful, for instance, if you intend to use the application on different target devices. The application is the same, but hardware-related parts of the code differ. Thus, depending on which target device you intend to build for, appropriate source files can be excluded from the build configuration. The following build configurations might fulfil these requirements for Project A:

- Project A - Device 1:Release
- Project A - Device 1:Debug
- Project A - Device 2:Release
- Project A - Device 2:Debug

Groups

Normally, projects contain hundreds of files that are logically related. You can define each project to contain one or more groups, in which you can collect related source files. You can also define multiple levels of subgroups to achieve a logical hierarchy. By default, each group is present in all build configurations of the project, but you can also specify a group to be excluded from a particular build configuration.

Source files

Source files can be located directly under the project node or in a hierarchy of groups. The latter is convenient if the amount of files makes the project difficult to survey. By default, each file is present in all build configurations of the project, but you can also specify a file to be excluded from a particular build configuration.

Only the files that are part of a build configuration will actually be built and linked into the output code.

Once a project has been successfully built, all include files and output files are displayed in the structure below the source file that included or generated them.

Note: The settings for a build configuration can affect which include files that will be used during compilation of a source file. This means that the set of include files associated with the source file after compilation can differ between the build configurations.

CREATING AND MANAGING WORKSPACES

This section describes the overall procedure for creating the workspace, projects, groups, files, and build configurations. The **File** menu provides the commands for creating workspaces. The **Project** menu provides commands for creating projects, adding files to a project, creating groups, specifying project options, and running the IAR Systems development tools on the current projects.

For reference information about these menus, menu commands, and dialog boxes, see the chapter *IAR Embedded Workbench® IDE reference*.

The steps involved for creating and managing a workspace and its contents are:

- Creating a workspace.
An empty Workspace window appears, which is the place where you can view your projects, groups, and files.
- Adding new or existing projects to the workspace.
When creating a new project, you can base it on a *template project* with preconfigured project settings. There are template projects available for C applications, C++ applications, assembler applications, and library projects.
- Creating groups.
A group can be added either to the project's top node or to another group within the project.
- Adding files to the project.
A file can be added either to the project's top node or to a group within the project.
- Creating new build configurations.
By default, each project you add to a workspace will have two build configurations called **Debug** and **Release**.
You can base a *new* configuration on an already existing configuration. Alternatively, you can choose to create a default build configuration.
Note that you do not have to use the same tool chain for the new build configuration as for other build configurations in the same project.
- Excluding groups and files from a build configuration.
Note that the icon indicating the excluded group or file will change to white in the Workspace window.
- Removing items from a project.

For a detailed example, see *Creating an application project*, page 25.

Note: It might not be necessary for you to perform all of these steps.

Drag and drop

You can easily drag individual source files and project files from the Windows file explorer to the Workspace window. Source files dropped on a *group* will be added to that group. Source files dropped outside the project tree—on the Workspace window background—will be added to the active project.

Source file paths

The IAR Embedded Workbench IDE supports relative source file paths to a certain degree.

If a source file is located in the project file directory or in any subdirectory of the project file directory, the IAR Embedded Workbench IDE will use a path relative to the project file when accessing the source file.

Navigating project files

There are two main different ways to navigate your project files: using the Workspace window or the Source Browser window. The Workspace window displays an hierarchical view of the source files, dependency files, and output files and how they are logically grouped. The Source Browser window, on the other hand, displays information about the build configuration that is currently active in the Workspace window. For that configuration, the Source Browser window displays a hierarchical view of all globally defined symbols, such as variables, functions, and type definitions. For classes, information about any base classes is also displayed.

VIEWING THE WORKSPACE

The Workspace window is where you access your projects and files during the application development.

- 1 Choose which project you want to view by clicking its tab at the bottom of the Workspace window.

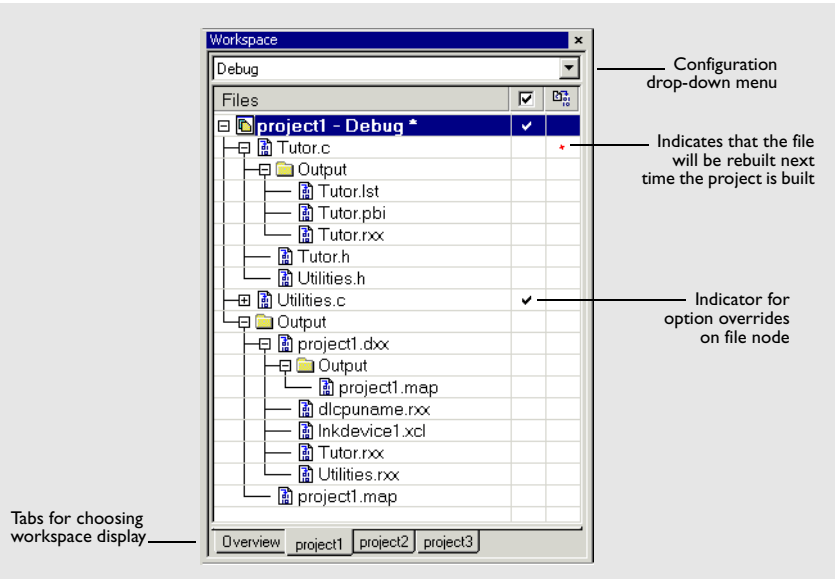


Figure 28: Displaying a project in the Workspace window

For each file that has been built, an *Output* folder icon appears, containing generated files, such as object files and list files. The latter is generated only if the list file option is enabled. There is also an *Output* folder related to the project node that contains generated files related to the whole project, such as the executable file and the linker map file (if the list file option is enabled).

Also, any included header files will appear, showing dependencies at a glance.

- 2 To display the project with a different build configuration, choose that build configuration from the drop-down list at the top of the Workspace window.

The project and build configuration you have selected are displayed highlighted in the Workspace window. It is the project and build configuration that is selected from the drop-down list that will be built when you build your application.

- 3 To display an overview of all projects in the workspace, click the **Overview** tab at the bottom of the Workspace window.

An overview of all project members is displayed.

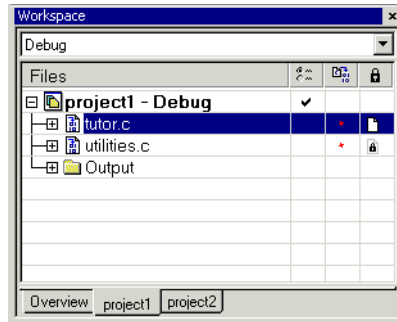


Figure 29: Workspace window—an overview

The current selection in the **Build Configuration** drop-down list is also highlighted when an overview of the workspace is displayed.

DISPLAYING BROWSE INFORMATION

To display browse information in the Source Browser window, choose **Tools>Options>Project** and select the option **Generate browse information**.

To open the Source Browser window, choose **View>Source Browser**. The Source Browser window is by default docked with the Workspace window. Source browse information is displayed for the active build configuration. For reference information, see *Source Browser window*, page 207.

Note that you can choose a file filter and a type filter from the context menu that appears when you right-click in the top pane of the window.

To see the definition of a global symbol or a function, there are three alternative methods that you can use:

- In the Source Browser window, right-click on a symbol, or function, and choose the **Go to definition** command from the context menu that appears
- In the Source Browser window, double-click on a row
- In the editor window, right-click on a symbol, or function, and choose the **Go to definition** command from the context menu that appears.

The definition of the symbol or function is displayed in the editor window.

The source browse information is continuously updated in the background. While you are editing source files, or when you open a new project, there will be a short delay before the information is up-to-date.

Source code control

IAR Embedded Workbench can identify and access any installed third-party source code control (SCC) system that conforms to the SCC interface published by Microsoft corporation. From within the IDE you can connect an IAR Embedded Workbench project to an external SCC project, and perform some of the most commonly used operations.

To connect your IAR Embedded Workbench project to a source code control system you should be familiar with the source code control *client application* you are using. Note that some of the windows and dialog boxes that appear when you work with source code control in the IAR Embedded Workbench IDE originate from the SCC system and are not described in the documentation from IAR Systems. For information about details in the client application, refer to the documentation supplied with that application.

Note: Different SCC systems use very different terminology even for some of the most basic concepts involved. It is important to keep this in mind when reading the description below.

INTERACTING WITH SOURCE CODE CONTROL SYSTEMS

In any SCC system, you use a client application to maintain a central archive. In this archive you keep the working copies of the files of your project. The SCC integration in IAR Embedded Workbench allows you to conveniently perform a few of the most common SCC operations directly from within the IDE. However, several tasks must still be performed in the client application.

To connect an IAR Embedded Workbench project to a source code control system, you should:

- In the SCC client application, set up an SCC project
- In IAR Embedded Workbench, connect your project to the SCC project.

Setting up an SCC project in the SCC client application

Use your SCC client tools to set up a working directory for the files in your IAR Embedded Workbench project that you want to control using your SCC system. The files can be placed in one or more nested subdirectories, all located under a common root. Specifically, all the source files must reside in the same directory as the `ewp` project file, or nested in subdirectories of this directory.

For information about the steps involved, refer to the documentation supplied with the SCC client application.

Connecting projects in IAR Embedded Workbench

In IAR Embedded Workbench, connect your application project to the SCC project.

- 1 In the Workspace window, select the project for which you have created an SCC project. From the **Project** menu, choose **Source Code Control>Add Project To Source Control**. This command is also available from the context menu that appears when you right-click in the Workspace window.

Note: The commands on the **Source Code Control** submenu are available when there is at least one SCC client application available.

- 2 If you have source code control systems from different vendors installed, a dialog box will appear to let you choose which system you want to connect to.
- 3 An SCC-specific dialog box will appear where you can navigate to the proper SCC project that you have set up.

Viewing the SCC states

When your IAR Embedded Workbench project has been connected to the SCC project, a column that contains status information for source code control will appear in the Workspace window. Different icons will be displayed depending on whether:

- a file is checked out to you
- a file is checked out to someone else
- a file is checked in
- a file has been modified
- there is a new version of a file in the archive.

There are also icons for some combinations of these states. Note that the interpretation of these states depends on the SCC client application you are using. For reference information about the icons and the different states they represent, see *Source code control states*, page 198.

For reference information about the commands available for accessing the SCC system, see *Source Code Control menu*, page 197.

Configuring the source code control system

To customize the source code control system, choose **Tools>Options** and click the **Source Code Control** tab. For reference information about the available commands, see *Terminal I/O options*, page 260.

Building

This chapter briefly discusses the process of building your application, and describes how you can extend the chain of build tools with tools from third-party suppliers.

Building your application

The building process consists of the following steps:

- Setting project options
- Building the project
- Correcting any errors detected during the build procedure.

To make the build process more efficient, you can use the **Batch Build** command. This gives you the possibility to perform several builds in one operation. If necessary, you can also specify pre-build and post-build actions.

In addition to use the IAR Embedded Workbench IDE for building projects, it is also possible to use the command line utility `iarbuild.exe` for building projects.

For examples of building application and library projects, see *Part 2. Tutorials* in this guide. For further information about building library projects, see the *IAR C/C++ Compiler Reference Guide*.

SETTING OPTIONS

To specify how your application should be built, you must define one or several build configurations. Every build configuration has its own settings, which are independent of the other configurations. All settings are indicated in a separate column in the Workspace window.

For example, a configuration that is used for debugging would not be highly optimized, and would produce output that suits the debugging. Conversely, a configuration for building the final application would be highly optimized, and produce output that suits a flash or PROM programmer.

For each build configuration, you can set options on the project level, group level, and file level. Many options can only be set on the project level because they affect the entire build configuration. Examples of such options are **General Options**, linker settings, and debug settings. Other options, such as compiler and assembler options, that you set on project level are default for the entire build configuration.

It is possible to override project level settings by selecting the required item, for instance a specific group of files, and selecting the option **Override inherited settings**. The new settings will affect all members of that group, that is, files and any groups of files. To restore all settings to the default factory settings, click the **Factory Settings** button.

Note: There is one important restriction on setting options. If you set an option on file level (file level override), no options on higher levels that operate on files will affect that file.

Using the Options dialog box

The **Options** dialog box—available by choosing **Project>Options**—provides options for the building tools. You set these options for the selected item in the Workspace window. Options in the **General Options**, **Linker**, and **Debugger** categories can only be set for the entire build configuration, and not for individual groups and files. However, the options in the other categories can be set for the entire build configuration, a group of files, or an individual file.

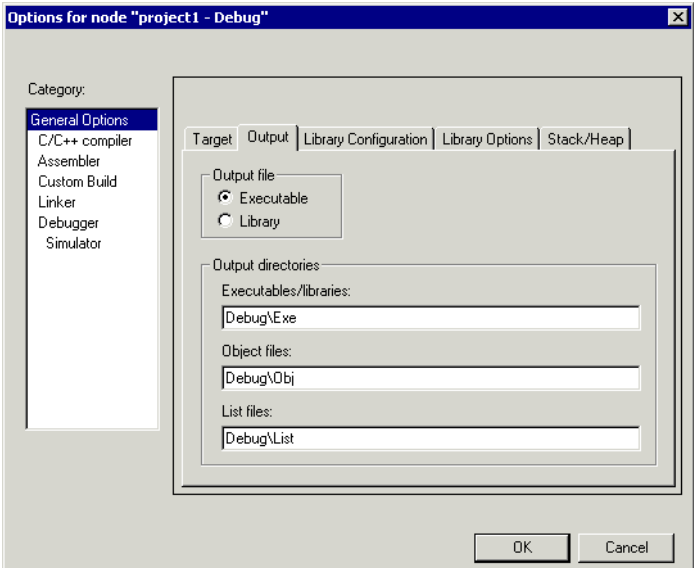


Figure 30: General options

The **Category** list allows you to select which building tool to set options for. The tools available in the **Category** list depends on which tools are included in your product. If you select **Library** as output file on the **Output** page, **Linker** will be replaced by **Library Builder** in the category list. When you select a category, one or more pages containing options for that component are displayed.

Click the tab corresponding to the type of options you want to view or change. To restore all settings to the default factory settings, click the **Factory Settings** button, which is available for all categories except **General Options** and **Custom Build**. Note that there are two sets of category settings available: Debug and Release. Which one that will be used depends on your build configuration; see *New Configuration dialog box*, page 235.

For information about each option and how to set options, see the chapters *General options*, *Compiler options*, *Assembler options*, *Linker options*, *Library builder options*, *Custom build options*, and *Debugger options* in Part 6. Reference information in this guide. For information about options specific to the debugger driver you are using, see the part of this book that corresponds to your driver.

Note: If you add to your project a source file with a non-recognized filename extension, you cannot set options on that source file. However, you can add support for additional filename extensions. For reference information, see *Filename Extensions dialog box*, page 263.

BUILDING A PROJECT

You have access to the build commands both from the **Project** menu and from the context menu that appears if you right-click an item in the Workspace window.

The three build commands **Make**, **Compile**, and **Rebuild All** run in the background, so you can continue editing or working with the IAR Embedded Workbench IDE while your project is being built.

For further reference information, see *Project menu*, page 231.

BUILDING MULTIPLE CONFIGURATIONS IN A BATCH

Use the batch build feature when you want to build more than one configuration at once. A batch is an ordered list of build configurations. The **Batch Build** dialog box—available from the **Project** menu—lets you create, modify, and build batches of configurations.

For workspaces that contain several configurations it is convenient to define one or several different batches. Instead of building the entire workspace, you can build only the appropriate build configurations, for instance Release or Debug configurations.

For detailed information about the **Batch Build** dialog box, see *Batch Build dialog box*, page 238.

USING PRE- AND POST-BUILD ACTIONS

If necessary, you can specify pre-build and post-build actions that you want to take place before or after the build. The **Build Actions** dialog box—available from the **Project** menu—lets you specify the actions required.

For detailed information about the **Build Actions** dialog box, see *Build actions options*, page 331.



Using pre-build actions for time stamping

Pre-build actions can be used for embedding a time stamp for the build in the resulting binary file. To achieve this, follow these steps:

- 1** Create a dedicated time stamp file, for example, `timestamp.c` and add it to your project.
- 2** In this source file, use the preprocessor macros `__TIME__` and `__DATE__` to initialize a string variable.
- 3** Choose **Project>Options>Build Actions** to open the **Build Actions** dialog box.
- 4** In the **Pre-build command line** text field, specify for example this pre-build action:

```
"touch $PROJ_DIR$\timestamp.c"
```

You can use the open source command line utility `touch` for this purpose or any other suitable utility which updates the modification time of the source file.

- 5** If the project is not entirely up-to-date, the next time you use the **Make** command, the pre-build action will be invoked before the regular build process. The regular build process then always must recompile `timestamp.c` and the correct timestamp will end up in the binary file.

If the project already is up-to-date, the pre-build action will not be invoked. This means that nothing will be built, and the binary file still contains the timestamp for when it was last built.

CORRECTING ERRORS FOUND DURING BUILD

The compiler, assembler, and debugger are fully integrated with the development environment. So if there are errors in your source code, you can jump directly to the correct position in the appropriate source file by double-clicking the error message in the error listing in the Build message window, or selecting the error and pressing Enter.

After you have resolved any problems reported during the build process and rebuilt the project, you can directly start debugging the resulting code at the source level.

To specify the level of output to the Build message window, choose **Tools>Options** to open the **IDE Options** dialog box. Click the **Messages** tab and select the level of output in the **Show build messages** drop-down list. Alternatively, you can right-click in the **Build Messages** window and select **Options** from the context menu.

For reference information about the Build messages window, see *Build window*, page 215.

BUILDING FROM THE COMMAND LINE

It is possible to build the project from the command line by using the IAR Command Line Build Utility (`iarbuild.exe`) located in the `common\bin` directory. As input you use the project file, and the invocation syntax is:

```
iarbuild project.ewp [-clean|-build|-make] <configuration>
[-log errors|warnings|info|all]
```

Parameter	Description
<code>project.ewp</code>	Your IAR Embedded Workbench IDE project file.
<code>-clean</code>	Removes any intermediate and output files.
<code>-build</code>	Rebuilds and relinks all files in the current build configuration.
<code>-make</code>	Brings the current build configuration up to date by compiling, assembling, and linking only the files that have changed since the last build.
<code>configuration</code>	The name of the configuration you want to build, which can either be one of the predefined configurations Debug or Release, or a name that you define yourself. For more information about build configurations, see <i>Projects and build configurations</i> , page 77.
<code>-log errors</code>	Displays build error messages.
<code>-log warnings</code>	Displays build warning and error messages.
<code>-log info</code>	Displays build warning and error messages, and messages issued by the <code>#pragma message</code> preprocessor directive.
<code>-log all</code>	Displays all messages generated from the build, for example compiler sign-on information and the full command line.

Table 8: `iarbuild.exe` command line options

If you run the application from a command shell without specifying a project file, you will get a sign-on message describing available parameters and their syntax.

Extending the tool chain

IAR Embedded Workbench provides a feature—Custom Build—which lets you extend the standard tool chain. This feature is used for executing external tools (not provided by IAR). You can make these tools execute each time specific files in your project have changed.

By specifying custom build options, on the **Custom tool configuration** page, the build commands treat the external tool and its associated files in the same way as the standard tools within the IAR Embedded Workbench IDE and their associated files. The relation between the external tool and its input files and generated output files is similar to the

relation between the C/C++ Compiler, `c` files, `h` files, and `xxx` files. See *Custom build options*, page 329, for details about available custom build options.

You specify filename extensions of the files used as input to the external tool. If the input file has changed since you last built your project, the external tool is executed; just as the compiler executes if a `c` file has changed. In the same way, any changes in additional input files (for instance include files) are detected.

You must specify the name of the external tool. You can also specify any necessary command line options needed by the external tool, as well as the name of the output files generated by the external tool. Note that it is possible to use argument variables for substituting file paths.

For some of the file information, you can use argument variables.

It is possible to specify custom build options to any level in the project tree. The options you specify are inherited by any sublevel in the project tree.

TOOLS THAT CAN BE ADDED TO THE TOOL CHAIN

Some examples of external tools, or types of tools, that you can add to the IAR Embedded Workbench tool chain are:

- Tools that generate files from a specification, such as Lex and YACC
- Tools that convert binary files—for example files that contain bitmap images or audio data—to a table of data in an assembler or C source file. This data can then be compiled and linked together with the rest of your application.

ADDING AN EXTERNAL TOOL

The following example demonstrates how to add the tool *Flex* to the tool chain. The same procedure can be used also for other tools.

In the example, Flex takes the file `foo.lex` as input. The two files `foo.c` and `foo.h` are generated as output.

- 1 Add the file you want to work with to your project, for example `foo.lex`.
- 2 Select this file in the Workspace window and choose **Project>Options**. Select **Custom Build** from the list of categories.
- 3 In the **Filename extensions** field, type the filename extension `.lex`. Remember to specify the leading period (`.`).
- 4 In the **Command line** field, type the command line for executing the external tool, for example

```
flex $FILE_PATH$ -o$FILE_BPATH$.c
```


During the build process, this command line will be expanded to:

```
flex foo.lex -ofoo.c
```

Note the usage of *argument variables*. For further details of these variables, see *Argument variables summary*, page 233.

Take special note of the use of `$FILE_BNAME$` which gives the base name of the input file, in this example appended with the `c` extension to provide a C source file in the same directory as the input file `foo.lex`.

- 5 In the **Output files** field, describe the output files that are relevant for the build. In this example, the tool Flex would generate two files—one source file and one header file. The text in the **Output files** text box for these two files would look like this:

```
$FILE_BPATH$.c  
$FILE_BPATH$.h
```

- 6 If there are any additional files used by the external tool during the build, these should be added in the **Additional input files** field: for instance:

```
$TOOLKIT_DIR$\inc\stdio.h
```

This is important, because if the dependency files change, the conditions will no longer be the same and the need for a rebuild is detected.

- 7 Click **OK**.
- 8 To build your application, choose **Project>Make**.

Editing

This chapter describes in detail how to use the IAR Embedded Workbench editor. The final section describes how to customize the editor and how to use an external editor of your choice.

Using the IAR Embedded Workbench editor

The integrated text editor allows editing of multiple files in parallel, and provides all basic editing features expected from a modern editor. In addition, it provides features specific to software development. It also recognizes C or C++ language elements.

EDITING A FILE

The editor window is where you write, view, and modify your source code. You can open one or several text files, either from the **File** menu, or by double-clicking a file in the Workspace window. If you open several files, they are organized in a *tab group*. You can have several editor windows open at the same time.

Click the tab for the file that you want to display. All open files are also available from the drop-down menu at the upper right corner of the editor window.

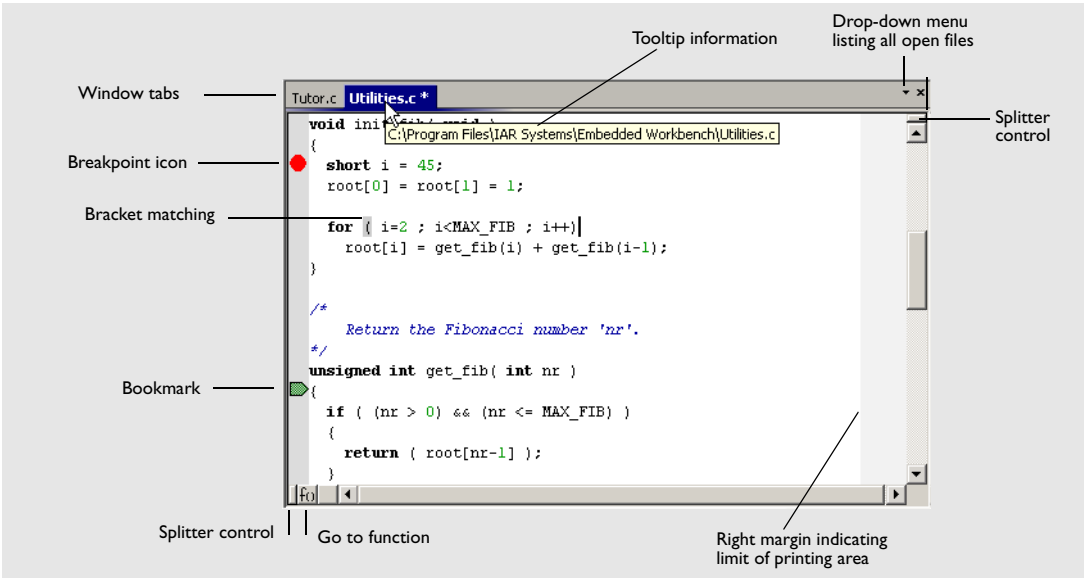


Figure 31: Editor window

The name of the open source file is displayed on the tab. If a file is read-only, a padlock is visible at the bottom left corner of the editor window. If a file has been modified after it was last saved, an asterisk appears on the tab after the filename, for example Utilities.c *.

The commands on the **Window** menu allow you to split the editor window into panes. On the **Window** menu you also find commands for opening multiple editor windows, as well as commands for moving files between different editor windows. For reference information about each command on the menu, see *Window menu*, page 266. For reference information about the editor window, see *Editor window*, page 202.



Note: When you want to print a source file, it can be useful to enable the option **Show line numbers**—available by choosing **Tools>Options>Editor**.

Accessing reference information for DLIB library functions

When you need to know the syntax for any C or Embedded C++ library function, select the function name in the editor window and press F1. The library documentation for the selected function appears in a help window.

Using and customizing editor commands and shortcut keys

The **Edit** menu provides commands for editing and searching in editor windows. For instance, unlimited undo/redo by using the **Edit>Undo** and **Edit>Redo** commands, respectively. You can also find some of these commands on the context menu that appears when you right-click in the editor window. For reference information about each command, see *Edit menu*, page 221.

There are also editor shortcut keys for:

- moving the insertion point
- scrolling text
- selecting text.

For detailed information about these shortcut keys, see *Editor key summary*, page 205.

To change the default shortcut key bindings, choose **Tools>Options**, and click the **Key Bindings** tab. For further details, see *Key Bindings options*, page 242.

Splitting the editor window into panes

You can split the editor window horizontally or vertically into multiple panes, to allow you to look at different parts of the same source file at once, or move text between two different panes.

To split the window, double-click the appropriate splitter bar, or drag it to the middle of the window. Alternatively, you can split a window into panes using the **Window>Split** command.

To revert to a single pane, double-click the splitter control or drag it back to the end of the scroll bar.

Dragging and dropping of text

You can easily move text within an editor window or between different editor windows. Select the text and drag it to the new location.

Syntax coloring

If the **Tools>Options>Editor>Syntax highlighting** option is enabled, the IAR Embedded Workbench editor automatically recognizes the syntax of:

- C and C++ keywords
- C and C++ comments
- Assembler directives and comments
- Preprocessor directives
- Strings.

The different parts of source code are displayed in different text styles.

To change these styles, choose **Tools>Options**, and use the **Editor>Colors and Fonts** options. For additional information, see *Editor Colors and Fonts options*, page 250.

In addition, you can define your own set of keywords that should be syntax-colored automatically:

- 1** In a text file, list all the keywords that you want to be automatically syntax-colored. Separate each keyword with either a space or a new line.
- 2** Choose **Tools>Options** and select **Editor>Setup Files**.
- 3** Select the **Use Custom Keyword File** option and specify your newly created text file. A browse button is available for your convenience.
- 4** Select **Edit>Colors and Fonts** and choose **User Keyword** from the **Syntax Coloring** list. Specify the font, color, and type style of your choice. For additional information, see *Editor Colors and Fonts options*, page 250.
- 5** In the editor window, type any of the keywords you listed in your keyword file; see how the keyword is syntax-colored according to your specification.

Automatic text indentation

The text editor can perform different kinds of indentation. For assembler source files and normal text files, the editor automatically indents a line to match the previous line. If you want to indent a number of lines, select the lines and press the Tab key. Press Shift-Tab to move a whole block of lines to the left.

For C/C++ source files, the editor indents lines according to the syntax of the C/C++ source code. This is performed whenever you:

- Press the Return key
- Type any of the special characters {, }, :, and #
- Have selected one or several lines, and choose the **Edit>Auto Indent** command.

To enable or disable the indentation:

- 1** Choose **Tools>Options** and select **Editor**.
- 2** Select or deselect the **Auto indent** option.

To customize the C/C++ automatic indentation, click the **Configure** button.

For additional information, see *Configure Auto Indent dialog box*, page 246.

Matching brackets and parentheses

When the insertion point is located next to a parenthesis, the matching parenthesis is highlighted with a light gray color:

```
for( int i = 0; i < 10; i++){
{
}
```

Figure 32: Parentheses matching in editor window

The highlight remains in place as long as the insertion point is located next to the parenthesis.

To select all text between the brackets surrounding the insertion point, choose **Edit>Match Brackets**. Every time you choose **Match Brackets** after that, the selection will increase to the next hierarchic pair of brackets.

Note: Both of these functions—automatic matching of corresponding parentheses and selection of text between brackets—apply to `()`, `[]`, and `{}`.

Displaying status information

As you are editing, the status bar—available by choosing **View>Status Bar**—shows the current line and column number containing the insertion point, and the Caps Lock, Num Lock, and Overwrite status:

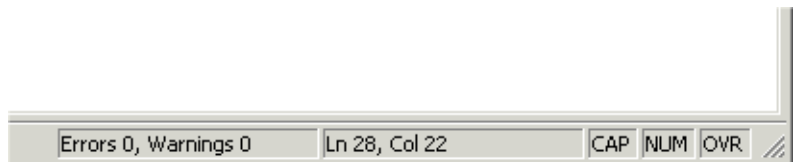


Figure 33: Editor window status bar

USING AND ADDING CODE TEMPLATES

Code templates is a method for conveniently inserting frequently used source code sequences, for example `for` loops and `if` statements. The code templates are defined in a normal text file. By default, there are a few example templates provided. In addition, you can easily add your own code templates.

Enabling code templates

By default, code templates are enabled. To enable and disable the use of code templates:

- 1 Choose **Tools>Options**.
- 2 Go to the **Editor Setup Files** page.

- 3 Select or deselect the **Use Code Templates** option.
- 4 In the text field, specify which template file you want to use; either the default file or one of your own template files. A browse button is available for your convenience.

Inserting a code template in your source code

To insert a code template in your source code, place the insertion point at the location where you want the template to be inserted and choose **Edit>Insert Template**. This command displays a list in the editor window from which you can choose a code template.

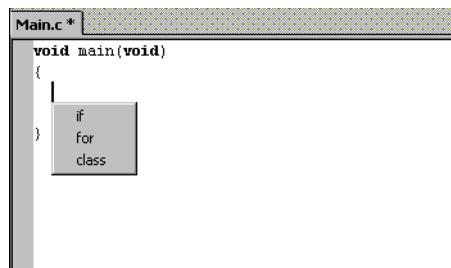


Figure 34: Editor window code template menu

If the code template you choose requires any type of field input, as in the `for` loop example which needs an end value and a count variable, an input dialog box appears.

Adding your own code templates

The source code templates are defined in a normal text file. The original template file `CodeTemplates.txt` is located in the `common\config` installation directory. The first time you use IAR Embedded Workbench, the original template file is copied to a directory for local settings, and this is the file that will be used by default if code templates are enabled. To use your own template file, follow the procedure described in *Enabling code templates*, page 97.

To open the template file and define your own code templates, choose **Edit>Code Templates>Edit Templates**.

The syntax for defining templates is described in the default template file.

NAVIGATING IN AND BETWEEN FILES

The editor provides several functions for easy navigation within the files and between different files:

- Switching between source and header files

If the insertion point is located on an `#include` line, you can choose the **Open "header.h"** command from the context menu, which opens the header file in an editor window. You can also choose the command **Open Header/Source File**, which opens the header or source file that corresponds to the current file, or activates it if it is already open. This command is available if the insertion point is located on any line except an `#include` line.

- Function navigation



Click the **Go to function** button in the bottom left corner in an editor window to list all functions defined in the source file displayed in the window. You can then choose to go directly to one of the functions by double-clicking it in the list.

- Adding bookmarks

Use the **Edit>Navigate>Toggle Bookmark** command to add and remove bookmarks. To switch between the marked locations, choose **Edit>Navigate>Go to Bookmark**.

SEARCHING

There are several standard search functions available in the editor:

- **Quick search** text box
- **Find** dialog box
- **Replace** dialog box
- **Find in files** dialog box
- **Incremental Search** dialog box.

To use the **Quick search** text box on the toolbar, type the text you want to search for and press Enter. Press Esc to cancel the search. This is a quick method for searching for text in the active editor window.

To use the **Find**, **Replace**, **Find in Files**, and **Incremental Search** functions, choose the corresponding command from the **Edit** menu. For reference information about each search function, see *Edit menu*, page 221.

Customizing the editor environment

The IAR Embedded Workbench IDE editor can be configured on the **IDE Options** pages **Editor** and **Editor Colors and Fonts**. Choose **Tools>Options** to access the pages.

For details about these pages, see *Tools menu*, page 240.

USING AN EXTERNAL EDITOR

The **External Editor** options—available by choosing **Tools>Options>Editor**—let you specify an external editor of your choice.

Note: While debugging using C-SPY, C-SPY will not use the external editor for displaying the current debug state. Instead, the built-in editor will be used.

To specify an external editor of your choice, follow this procedure:

- 1** Select the option **Use External Editor**.
- 2** An external editor can be called in one of two ways, using the **Type** drop-down menu.
Command Line calls the external editor by passing command line parameters.
DDE calls the external editor by using DDE (Windows Dynamic Data Exchange).
- 3** If you use the command line, specify the command line to pass to the editor, that is, the name of the editor and its path, for instance:

`C:\WINNT\notepad.exe`.

You can send an argument to the external editor by typing the argument in the **Arguments** field. For example, type `$FILE_PATH$` to start the editor with the active file (in editor, project, or Messages window).

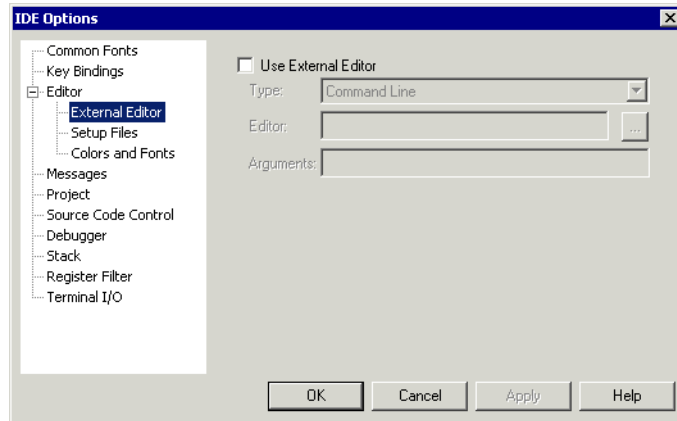


Figure 35: Specifying external command line editor

- 4 If you use DDE, specify the editor's DDE service name in the **Service** field. In the **Command** field, specify a sequence of command strings to send to the editor.

The service name and command strings depend on the external editor that you are using. Refer to the user documentation of your external editor to find the appropriate settings.

The command strings should be entered as:

```
DDE-Topic CommandString
DDE-Topic CommandString
```

as in the following example, which applies to Codewright®:

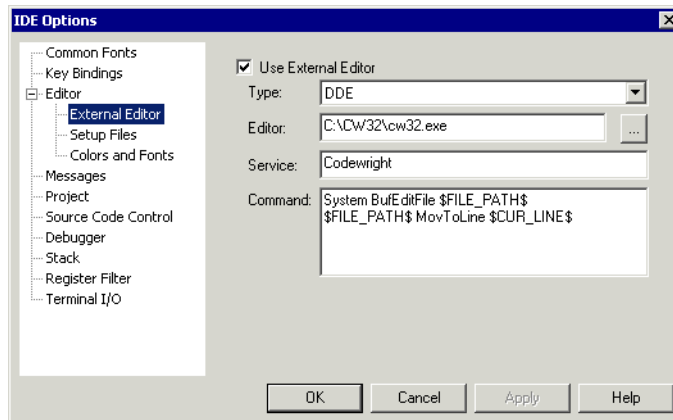


Figure 36: External editor DDE settings

The command strings used in this example will open the external editor with a dedicated file activated. The cursor will be located on the current line as defined in the context from where the file is open, for instance when searching for a string in a file, or when double-clicking an error message in the Message window.

5 Click **OK**.


When you open a file by double-clicking it in the Workspace window, the file will be opened by the external editor.

Variables can be used in the arguments. For more information about the argument variables that are available, see *Argument variables summary*, page 233.

Part 4. Debugging

This part of the IAR Embedded Workbench® IDE User Guide contains the following chapters:

- The IAR C-SPY® Debugger
- Executing your application
- Working with variables and expressions
- Using breakpoints
- Monitoring memory and registers
- Using the C-SPY® macro system
- Analyzing your application.





The IAR C-SPY® Debugger

This chapter introduces you to the IAR C-SPY Debugger. First some of the concepts are introduced that are related to debugging in general and to the IAR C-SPY Debugger in particular. Then the debugger environment is presented, followed by a description of how to setup, start, and finally adapt C-SPY to target hardware.

Debugger concepts

This section introduces some of the concepts that are related to debugging in general and to the IAR C-SPY Debugger in particular. This section does not contain specific conceptual information related to the functionality of the IAR C-SPY Debugger. Instead, such information can be found in each chapter of this part of the guide. The IAR Systems user documentation uses the following terms when referring to these concepts.

IAR C-SPY DEBUGGER AND TARGET SYSTEMS

The IAR C-SPY Debugger can be used for debugging either a software target system or a hardware target system.

The following figure shows an overview of C-SPY and possible target systems.

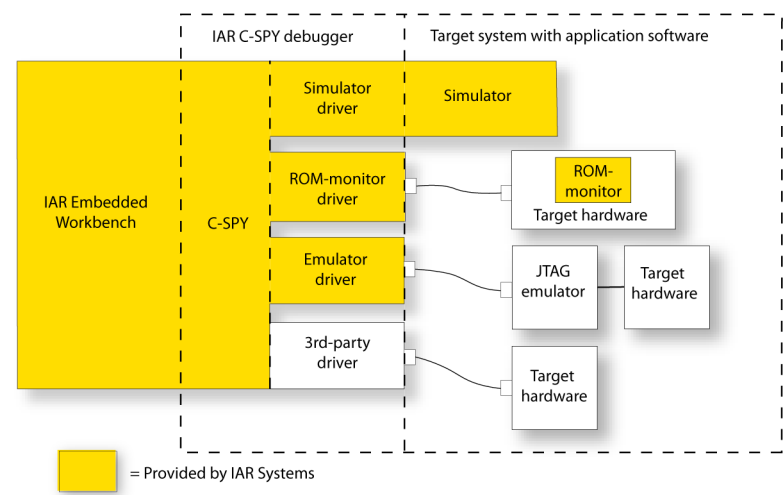


Figure 37: IAR C-SPY Debugger and target systems

DEBUGGER

The debugger, for instance C-SPY, is the program that you use for debugging your applications on a target system.

TARGET SYSTEM

The target system is the system on which you execute your application when you are debugging it. The target system can consist of hardware, either an evaluation board or your own hardware design. It can also be completely or partially simulated by software. Each type of target system needs a dedicated C-SPY driver.

USER APPLICATION

A user application is the software you have developed and which you want to debug using the IAR C-SPY Debugger.

IAR C-SPY DEBUGGER SYSTEMS

The IAR C-SPY Debugger consists of both a general part which provides a basic set of C-SPY features, and a driver. The C-SPY driver is the part that provides communication with and control of the target system. The driver also provides the user

interface—menus, windows, and dialog boxes—to the functions provided by the target system, for instance, special breakpoints. There are three main types of C-SPY drivers:

- Simulator driver
- ROM-monitor driver
- Emulator driver

If you have more than one C-SPY driver installed on your computer you can switch between them by choosing the appropriate driver from within the IAR Embedded Workbench IDE.

For an overview of the general features of IAR C-SPY Debugger, see *IAR C-SPY Debugger*, page 5. For an overview of the functionality provided by each driver, see the online help system available from the **Help** menu. There may also be a driver guide in hypertext PDF format available in the `doc` directory. Contact your software distributor or IAR representative for information about available C-SPY drivers. You can also find information on the IAR Systems website, www.iar.com.

ROM-MONITOR PROGRAM

The ROM-monitor program is a piece of firmware that is loaded to non-volatile memory on your target hardware; it runs in parallel with your application. The ROM-monitor communicates with the debugger and provides services needed for debugging the application, for instance stepping and breakpoints.

THIRD-PARTY DEBUGGERS

It is possible to use a third-party debugger together with the IAR Systems tool chain as long as the third-party debugger can read any of the output formats provided by XLINK, such as UBROF, ELF/DWARF, COFF, Intel-extended, Motorola, or any other available format. For information about which format to use with third-party debuggers, see the user documentation supplied with that tool.

The C-SPY environment

AN INTEGRATED ENVIRONMENT

The IAR C-SPY Debugger is a high-level-language debugger for embedded applications. It is designed for use with the IAR C/C++ Compiler and IAR Assembler, and is completely integrated in the IAR Embedded Workbench IDE, providing development and debugging within the same application.

All windows that are open in the Embedded Workbench workspace will stay open when you start the C-SPY Debugger. In addition, a set of C-SPY-specific windows will be opened.

You can modify your source code in an editor window during the debug session, but changes will not take effect until you exit from the debugger and rebuild your application.

The integration also makes it possible to set breakpoints in the text editor at any point during the development cycle. It is also possible to inspect and modify breakpoint definitions also when the debugger is not running, and breakpoint definitions flow with the text as you edit. Your debug settings, such as watch properties, window layouts, and register groups will remain between your debug sessions. When the debugger is running, breakpoints are highlighted in the editor windows.

In addition to the features available in the IAR Embedded Workbench IDE, the debugger environment consists of a set of C-SPY-specific items, such as a debugging toolbar, menus, windows, and dialog boxes.

Reference information about each item specific to C-SPY can be found in the chapter *C-SPY® Debugger reference*, page 269.

For specific information about a C-SPY driver, see the part of the book corresponding to the driver.

Setting up the IAR C-SPY Debugger

Before you start the IAR C-SPY Debugger you should set options to set up the debugger system. These options are available on the **Setup** page of the **Debugger** category, available with the **Project>Options** command. On the **Plugins** page you can find options for loading plug-in modules.

In addition to the options for setting up the debugger system, you can also set debugger-specific IDE options. These options are available with the **Tools>Options** command. For further information about these options, see *Debugger options*, page 255.

CHOOSING A DEBUG DRIVER

Before starting C-SPY, you must choose a driver for the debugger system from the **Driver** drop-down list on the **Setup** page. The contents of the drop-down list depend on your product installation; drivers for hardware debugger systems might, or might not be available. If you choose a driver for a hardware debugger system, you also need to set hardware-specific options. For information about these options, see the online help system available from the **Help** menu.

If you choose a driver for a hardware debugger system, you also need to set hardware-specific options. For information about these options, see the online help system available from the **Help** menu and *Part 6. Reference information* in this guide.

Note: You can only choose a driver you have installed on your computer.

EXECUTING FROM RESET

Using the **Run to** option, you can specify a location you want C-SPY to run to when you start the debugger as well as after each reset. C-SPY will place a breakpoint at this location and all code up to this point will be executed prior to stopping at the location.

The default location to run to is the `main` function. Type the name of the location if you want C-SPY to run to a different location. You can specify assembler labels or whatever can be evaluated to such, for instance function names.

If you leave the check box empty, the program counter will then contain the regular hardware reset address at each reset.

If there are no breakpoints available when C-SPY starts, a warning message appears notifying you that single stepping will be required and that this is time consuming. You can then continue execution in single step mode or stop at the first instruction. If you choose to stop at the first instruction, the debugger starts executing with the PC (program counter) at the default reset location instead of the location you typed in the **Run to** box.

Note: This message will never be displayed in the C-SPY Simulator, where breakpoints are not limited.

For driver-specific information about breakpoints, see the online help system available from the **Help** menu.

USING A SETUP MACRO FILE

A setup macro file is a standard macro file that you choose to load automatically when C-SPY starts. You can define the setup macro file to perform actions according to your needs, by using setup macro functions and system macros. Thus, by loading a setup macro file you can initialize C-SPY to perform actions automatically.

To register a setup macro file, select **Use macro file** and type the path and name of your setup macro file, for example `Setup.mac`. If you do not type a filename extension, the extension `mac` is assumed. A browse button is available for your convenience.

For detailed information about setup macro files and functions, see *The macro file*, page 144. For an example about how to use a setup macro file, see the chapter *Simulating an interrupt* in *Part 2. Tutorials*.

SELECTING A DEVICE DESCRIPTION FILE

C-SPY handles several of the target-specific adaptations by using device description files. They contain device-specific information about for example, definitions of peripheral units and CPU registers, and groups of these.

If you want to use the device-specific information provided in the device description file during your debug session, you must select the appropriate device description file.

Device description files are provided in the `cpuname\config` directory and they have the filename extension `ddf`.

To load a device description file that suits your device, you must, before you start the C-SPY debugger, choose **Project>Options** and select the **Debugger** category. On the **Setup** page, enable the use of a description file and select a file using the **Device description file** browse button.

For an example about how to use a setup macro file, see *Simulating an interrupt in Part 2. Tutorials*.

LOADING PLUGIN MODULES

On the **Plugins** page you can specify C-SPY plugin modules that are to be loaded and made available during debug sessions. Plugin modules can be provided by IAR, as well as by third-party suppliers. Contact your software distributor or IAR representative, or visit the IAR Systems web site, for information about available modules.

For information about how to load plugin modules, see *Plugins*, page 351.

The IAR C-SPY RTOS awareness plugin modules

Provided that there is one or more real-time operating systems plugin modules supported for the IAR Embedded Workbench version you are using, you can load one for use with the IAR C-SPY Debugger. C-SPY RTOS awareness plugin modules give you a high level of control and visibility over an application built on top of a real-time operating system. It displays RTOS-specific items like task lists, queues, semaphores, mailboxes and various RTOS system variables. Task-specific breakpoints and task-specific stepping make it easier to debug tasks.

A loaded plugin will add its own set of windows and buttons when a debug session is started (provided that the RTOS is linked with the application). For information about other RTOS awareness plugin modules, refer to the manufacturer of the plugin module.

Starting the IAR C-SPY Debugger

When you have set up the debugger, you can start it.



To start the IAR C-SPY Debugger and load the current project, click the **Debug** button. Alternatively, choose the **Project>Debug** command.

For information about how to execute your application and how to use the C-SPY features, see the remaining chapters in *Part 4. Debugging*.

Executable files built outside of the IAR Embedded Workbench IDE

It is also possible to load C-SPY with a project that was built outside the IAR Embedded Workbench IDE, for example projects built on the command line. To be able to set C-SPY options for the externally built project, you must create a project within the IAR Embedded Workbench IDE.

To load an externally built executable file, you must first create a project for it in your workspace. Choose **Project>Create New Project**, and specify a project name. To add the executable file to the project, choose **Project>Add Files** and make sure to choose **All Files** in the **Files of type** drop-down list. Locate the executable file (filename extension `.dxx`). To start the executable file, select the project in the Workspace window and click the **Debug** button. The project can be reused whenever you rebuild your executable file.

The only project options that are meaningful to set for this kind of project are options in the **General Options** and **Debugger** categories. Make sure to set up the general project options in the same way as when the executable file was built.

To flash an externally generated application, a corresponding `sim` file must be available in the same directory as the `dxx` file.

REDIRECTING DEBUGGER OUTPUT TO A FILE

The Debug Log window—available from the **View** menu—displays debugger output, such as diagnostic messages and trace information. It can sometimes be convenient to log the information to a file where it can be easily inspected. The **Log Files** dialog box—available from the **Debug** menu—allows you to log output from C-SPY to a file. The two main advantages are:

- The file can be opened in another tool, for instance an editor, so you can navigate and search within the file for particularly interesting parts
- The file provides history about how you have controlled the execution, for instance, what breakpoints have been triggered etc.

The information printed in the file is by default the same as the information listed in the Log window. However, you can choose what you want to log in the file: errors,

warnings, system information, user messages, or all of these. For reference information about the Log File options, see *Log File dialog box*, page 300.

Executing your application

The IAR C-SPY® Debugger provides a flexible range of facilities for executing your application during debugging. This chapter contains information about:

- The conceptual differences between source mode and disassembly mode debugging
- Executing your application
- The call stack
- Handling terminal input and output.

Source and disassembly mode debugging

The IAR C-SPY Debugger allows you to switch seamlessly between source mode and disassembly mode debugging as required.

Source debugging provides the fastest and easiest way of developing your application, without having to worry about how the compiler or assembler has implemented the code. In the editor windows you can execute the application one statement at a time while monitoring the values of variables and data structures.

Disassembly mode debugging lets you focus on the critical sections of your application, and provides you with precise control over the hardware. You can open a disassembly window which displays a mnemonic assembler listing of your application based on actual memory contents rather than source code, and lets you execute the application exactly one instruction at a time. In Mixed-Mode display, the debugger also displays the corresponding C/C++ source code interleaved with the disassembly listing.

Regardless of which mode you are debugging in, you can display registers and memory, and change their contents.

For an example of a debug session both in C source mode and disassembly mode, see *Debugging the application*, page 35.

Executing

The IAR C-SPY Debugger provides a flexible range of features for executing your application. You can find commands for executing on the **Debug** menu as well as on the toolbar.

STEP

C-SPY allows more stepping precision than most other debuggers in that it is not line-oriented but statement-oriented. The compiler generates detailed stepping information in the form of *step points* at each statement, as well as at each function call. That is, source code locations where you might consider whether to execute a step into or a step over command. Because the step points are located not only at each statement but also at each function call, the step functionality allows a finer granularity than just stepping on statements. There are four different step commands:

- Step Into
- Step Over
- Next Statement
- Step Out

Consider this example and assume that the previous step has taken you to the `f(i)` function call (highlighted):

```
int f(int n)
{
    value = f(n-1) + f(n-2) + f(n-3);
    return value;
}
...
f(i);
value ++;
```

While stepping, you typically consider whether to step into a function and continue stepping inside the function or subroutine. The **Step Into** command takes you to the first step point within the subroutine, `f(n-1)`:

```
int f(int n)
{
    value = f(n-1) + f(n-2) + f(n-3);
    return value;
}
...
f(i);
value ++;
```


The **Step Into** command executes to the next step point in the normal flow of control, regardless of whether it is in the same or another function.

The **Step Over** command executes to the next step point in the same function, without stopping inside called functions. The command would take you to the $f(n-2)$ function call, which is not a statement on its own but part of the same statement as $f(n-1)$. Thus, you can skip uninteresting calls which are parts of statements and instead focus on critical parts:

```
int f(int n)
{
    value = f(n-1) + f(n-2) + f(n-3);
    return value;
}
...
f(i);
value ++;
```

The **Next Statement** command executes directly to the next statement `return value`, allowing faster stepping:

```
int f(int n)
{
    value = f(n-1) + f(n-2) + f(n-3);
    return value;
}
...
f(i);
value ++;
```

When inside the function, you have the choice of stepping out of it before reaching the function exit, by using the **Step Out** command. This will take you directly to the statement immediately after the function call:

```
int f(int n)
{
    value = f(n-1) + f(n-2) + f(n-3);
    return value;
}
...
f(i);
value ++;
```

The possibility of stepping into an individual function that is part of a more complex statement is particularly useful when you use C code containing many nested function calls. It is also very useful for Embedded C++, which tends to have many implicit function calls, such as constructors, destructors, assignment operators, and other user-defined operators.

This detailed stepping can in some circumstances be either invaluable or unnecessarily slow. For this reason, it is also possible to step only on statements, which means faster stepping.

GO

The **Go** command continues execution from the current position until a breakpoint or program exit is reached.

RUN TO CURSOR

The **Run to Cursor** command executes to the position in the source code where you have placed the cursor. The **Run to Cursor** command also works in the Disassembly window and in the Call Stack window.

HIGHLIGHTING

At each stop, C-SPY highlights the corresponding C or C++ source or instruction with a green color, in the editor and the Disassembly window respectively. In addition, a green arrow appears in the editor window when you step on C or C++ source level, and in the Disassembly window when you step on disassembly level. This is determined by which of the windows is the active window. If none of the windows are active, it is determined by which of the window is currently placed over the other window.

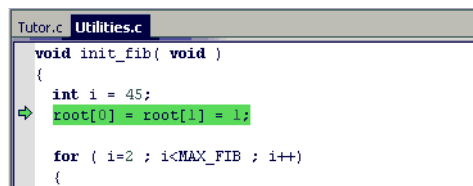


Figure 38: C-SPY highlighting source location

For simple statements without function calls, the whole statement is typically highlighted. When stopping at a statement with function calls, C-SPY highlights the first call because this illustrates more clearly what **Step Into** and **Step Over** would mean at that time.

Occasionally, you will notice that a statement in the source window is highlighted using a pale variant of the normal highlight color. This happens when the program counter is at an assembler instruction which is part of a source statement but not exactly at a step point. This is often the case when stepping in the Disassembly window. Only when the program counter is at the first instruction of the source statement, the ordinary highlight color is used.

USING BREAKPOINTS TO STOP

You can set breakpoints in the application to stop at locations of particular interest. These locations can be either at code sections where you want to investigate whether your program logic is correct, or at data accesses to investigate when and how the data is changed. Depending on which debugger system you are using you might also have access to additional types of breakpoints. For instance, if you are using C-SPY Simulator there is a special kind of breakpoint to facilitate simulation of simple hardware devices. See the chapter *Simulator-specific debugging* for further details.

For a more advanced simulation, you can stop under certain conditions, which you specify. It is also possible to connect a C-SPY macro to the breakpoint. The macro can be defined to perform actions, which for instance can simulate specific hardware behavior.

All these possibilities provide you with a flexible tool for investigating the status of, for example, variables and registers at different stages during the application execution.

For detailed information about the breakpoint system and how to use the different breakpoint types, see the chapter *Using breakpoints*.

USING THE BREAK BUTTON TO STOP

While your application is executing, the **Break** button on the debug toolbar is highlighted in red. You can stop the application execution by clicking the **Break** button, alternatively by choosing the **Debug>Break** command.

STOP AT PROGRAM EXIT

Typically, the execution of an embedded application is not intended to end, which means that the application will not make use of a traditional exit. However, there are situations where a controlled exit is necessary, such as during debug sessions. You can link your application with a special library that contains an exit label. A breakpoint will be automatically set on that label to stop execution when it gets there. Before you start C-SPY, choose **Project>Options**, and select the **Linker** category. On the **Output** page, select the option **With runtime control modules (-r)**.

Call stack information

The IAR C/C++ Compiler generates extensive backtrace information. This allows C-SPY to show, without any runtime penalty, the complete call chain at any time. Typically, this is useful for two purposes:

- Determining in what context the current function has been called

- Tracing the origin of incorrect values in variables and incorrect values in parameters, thus locating the function in the call chain where the problem occurred.

The Call Stack window—available from the **View** menu—shows a list of function calls, with the current function at the top. When you inspect a function in the call chain, by double-clicking on any function call frame, the contents of all affected windows will be updated to display the state of that particular call frame. This includes the editor, Locals, Register, Watch and Disassembly windows. A function would normally not make use of all registers, so these registers might have undefined states and be displayed as dashes (---). For reference information about the Call Stack window, see *Call Stack window*, page 288.

In the editor and Disassembly windows, a green highlight indicates the topmost, or current, call frame; a yellow highlight is used when inspecting other frames.

For your convenience, it is possible to select a function in the call stack and click the **Run to Cursor** command—available on the **Debug** menu, or alternatively on the context menu—to execute to that function.

Assembler source code does not automatically contain any backtrace information. To be able to see the call chain also for your assembler modules, you can add the appropriate `CFI` assembler directives to the source code. For further information, see the *IAR Assembler Reference Guide*.

Terminal input and output

Sometimes you might need to debug constructions in your application that use `stdin` and `stdout` without an actual hardware device for input and output. The Terminal I/O window—available on the **View** menu—lets you enter input to your application, and display output from it. This facility can be useful in two different contexts:

- If your application uses `stdin` and `stdout`
- For producing debug trace printouts.

To use this window, you need to link your application with the option **With I/O emulation modules**. C-SPY will then direct `stdin`, `stdout`, and `stderr` to this window.

For reference information, see *Terminal I/O window*, page 289.

Directing `stdin` and `stdout` to a file

You can also direct `stdin` and `stdout` directly to a file. You can then open the file in another tool, for instance an editor, to navigate and search within the file for particularly interesting parts. The **Terminal I/O Log Files** dialog box—available by choosing

Debug>Logging—allows you to select a destination log file, and to log terminal I/O input and output from C-SPY to this file.

For reference information, see *Terminal I/O Log File dialog box*, page 301.

Working with variables and expressions

This chapter defines the variables and expressions used in C-SPY®. It also demonstrates the different methods for examining variables and expressions.

C-SPY expressions

C-SPY lets you examine the C variables, C expressions, and assembler symbols that you have defined in your application code. In addition, C-SPY allows you to define C-SPY macro variables and macro functions and use them when evaluating expressions. Expressions that are built with these components are called C-SPY expressions and there are several methods for monitoring these in C-SPY.

C-SPY expressions can include any type of C expression, except function calls. The following types of symbols can be used in expressions:

- C/C++ symbols
- Assembler symbols (register names and assembler labels)
- C-SPY macro functions
- C-SPY macro variables

Examples of valid C-SPY expressions are:

```
i + j  
i = 42  
#asm_label  
#R2  
#PC  
my_macro_func(19)
```

C SYMBOLS

C symbols are symbols that you have defined in the C source code of your application, for instance variables, constants, and functions. C symbols can be referenced by their names.

Using sizeof

According to the ISO/ANSI C standard, there are two syntactical forms of `sizeof`:

```
sizeof(type)
```

`sizeof expr`

The former is for types and the latter for expressions.

In C-SPY, do not use parentheses around an expression when you use the `sizeof` operator. For example, use `sizeof x+2` instead of `sizeof (x+2)`.

ASSEMBLER SYMBOLS

Assembler symbols can be assembler labels or register names. That is, general purpose registers and special purpose registers, such as the program counter and the status register. If a device description file is used, all memory-mapped peripheral units, such as I/O ports, can also be used as assembler symbols in the same way as the CPU registers. See *Selecting a device description file*, page 110.

Assembler symbols can be used in C-SPY expressions if they are prefixed by #.

Example	What it does
<code>#pc++</code>	Increments the value of the program counter.
<code>myptr = #label7</code>	Sets <code>myptr</code> to the integral address of <code>label7</code> within its zone.

Table 9: C-SPY assembler symbols expressions

In case of a name conflict between a hardware register and an assembler label, hardware registers have a higher precedence. To refer to an assembler label in such a case, you must enclose the label in back quotes ` (ASCII character 0x60). For example:

Example	What it does
<code>#pc</code>	Refers to the program counter.
<code>#`pc`</code>	Refers to the assembler label <code>pc</code> .

Table 10: Handling name conflicts between hardware registers and assembler labels

Which processor-specific symbols are available by default can be seen in the **Register** window, using the CPU Registers register group. See *Register groups*, page 140.

MACRO FUNCTIONS

Macro functions consist of C-SPY variable definitions and macro statements which are executed when the macro is called.

For details of C-SPY macro functions and how to use them, see *The macro language*, page 144.

MACRO VARIABLES

Macro variables are defined and allocated outside your application, and can be used in a C-SPY expression. In case of a name conflict between a C symbol and a C-SPY macro

variable, the C-SPY macro variable will have a higher precedence than the C variable. Assignments to a macro variable assigns both its value and type.

For details of C-SPY macro variables and how to use them, see *The macro language*, page 361.

Limitations on variable information

The value of a C variable is valid only on step points, that is, the first instruction of a statement and on function calls. This is indicated in the editor window with a bright green highlight color. In practice the value of the variable is accessible and correct more often than that.

When the program counter is inside a statement, but not at a step point, the statement or part of the statement is highlighted with a pale variant of the ordinary highlight color.

EFFECTS OF OPTIMIZATIONS

The compiler is free to optimize the application software as much as possible, as long as the expected behavior remains. Depending on your project settings, a high level of optimization results in smaller or faster code, but also in increased compile time. Debugging might be more difficult because it will be less clear how the generated code relates to the source code. Typically, using a high optimization level can affect the code in a way that will not allow you to view a value of a variable as expected.

Consider this example:

```
foo()
{
    int i = 42;
    ...
    x = bar(i); //Not until here the value of i is known to C-SPY
    ...
}
```

From the point where the variable `i` is declared until it is actually used there is no need for the compiler to waste stack or register space on it. The compiler can optimize the code, which means C-SPY will not be able to display the value until it is actually used. If you try to view a value of a variable that is temporarily unavailable, C-SPY will display the text:

```
Unavailable
```

If you need full information about values of variables during your debugging session, you should make sure to use the lowest optimization level during compilation, that is, **None**.

Viewing variables and expressions

There are several methods for looking at variables and calculating their values:

- **Tooltip watch**—in the editor window—provides the simplest way of viewing the value of a variable or more complex expressions. Just point at the variable with the pointer. The value will be displayed next to the variable.
- **The Auto window**—available from the **View** menu—automatically displays a useful selection of variables and expressions in, or near, the current statement.
- **The Locals window**—available from the **View** menu—automatically displays the local variables, that is, auto variables and function parameters for the active function.
- **The Watch window**—available from the **View** menu—allows you to monitor the values of C-SPY expressions and variables.
- **The Live Watch window**—available from the **View** menu—repeatedly samples and displays the value of expressions while your application is executing. Variables in the expressions must be statically located, such as global variables.
- **The Statics window**—available from the **View** menu—automatically displays the values of variables with static storage duration.
- **The Quick Watch window**, see *Using the Quick Watch window*, page 125.
- **The Trace system**, see *Using the trace system*, page 125.



For text that is too wide to fit in a column—in any of the above windows, except the Trace window—and thus is truncated, just point at the text with the mouse pointer and tooltip information will be displayed.

For reference information about the different windows, see *C-SPY windows*, page 269.

WORKING WITH THE WINDOWS

All the windows are easy to use. You can add, modify, and remove expressions, and change the display format.

A context menu containing useful commands is available in all windows if you right-click in each window. Convenient drag-and-drop between windows is supported, except for in the Locals window and the Quick Watch window where it is not applicable.

To add a value you can also click in the dotted rectangle and type the expression you want to examine. To modify the value of an expression, click in the **Value** field and modify its content. To remove an expression, select it and press the Delete key.

Using the Quick Watch window

The Quick Watch window—available from the **View** menu—lets you watch the value of a variable or expression and evaluate expressions.

The Quick Watch window is different from the Watch window in the following ways:

- The Quick Watch window offers a fast method for inspecting and evaluating expressions. Right-click on the expression you want to examine and choose **Quick Watch** from the context menu that appears. The expression will automatically appear in the Quick Watch window.
- In contrast to the Watch window, the Quick Watch window gives you precise control over when to evaluate the expression. For single variables this might not be necessary, but for expressions with side effects, such as assignments and C-SPY macro functions, it allows you to perform evaluations under controlled conditions.

USING THE TRACE SYSTEM

A *trace* is a recorded sequence of events in the target system, typically executed machine instructions. Depending on what C-SPY driver you are using, additional types of trace data can be recorded. For example, read and write accesses to memory, as well as the values of C-SPY expressions.

By using the trace system, you can trace the program flow up to a specific state, for instance an application crash, and use the trace information to locate the origin of the problem. Trace information can be useful for locating programming errors that have irregular symptoms and occur sporadically. Trace information can also be useful as test documentation.

The trace system is not supported by all C-SPY drivers. For detailed information about the trace system and the components provided by the C-SPY driver you are using, see the corresponding driver documentation in *Simulator-specific debugging*, page 159 and the online help system, respectively.

Which trace system functionality that is provided depends on the C-SPY driver you are using. However, for all C-SPY drivers that support the trace system, the Trace window, the Find in Trace window, and the **Find in Trace** dialog box are always available. You can save the trace information to a file to be analyzed later.

The Trace window and its browse mode

The type of information that is displayed in the Trace window depends on the C-SPY driver you are using. The different trace data is displayed in separate columns, but the **Trace** column is always available if the driver you are using supports the trace system. The corresponding source code can also be shown.

You can follow the execution history by simply looking and scrolling in the Trace window. Alternatively, you can enter *browse mode*. To enter browse mode, double-click an item in the Trace window, or click the **Browse** toolbar button. The selected item turns yellow and the source and disassembly windows will highlight the corresponding location. You can now move around in the Trace window by using the up and down arrow keys, or by scrolling and clicking; the source and Disassembly windows will be updated to show the corresponding location. Double-click again to leave browse mode.

Searching in the trace data

You can perform advanced searches in the recorded trace data. You specify the search criteria in the **Find in Trace** dialog box and view the result in the Find in Trace window.

The Find in Trace window is very similar to the Trace window, showing the same columns and data, but *only* those rows that match the specified search criteria. Double-clicking an item in the Find in Trace window brings up the same item in the Trace window.

VIEWING ASSEMBLER VARIABLES

An assembler label does not convey any type information at all, which means C-SPY cannot easily display data located at that label without getting extra information. To view data conveniently, C-SPY treats, by default, all data located at assembler labels as variables of type `int`. However, in the Watch, Quick Watch, and Live Watch windows, you can select a different interpretation to better suit the declaration of the variables.

In this figure, you can see four variables in the Watch window and their corresponding declarations in the assembler source file to the left:

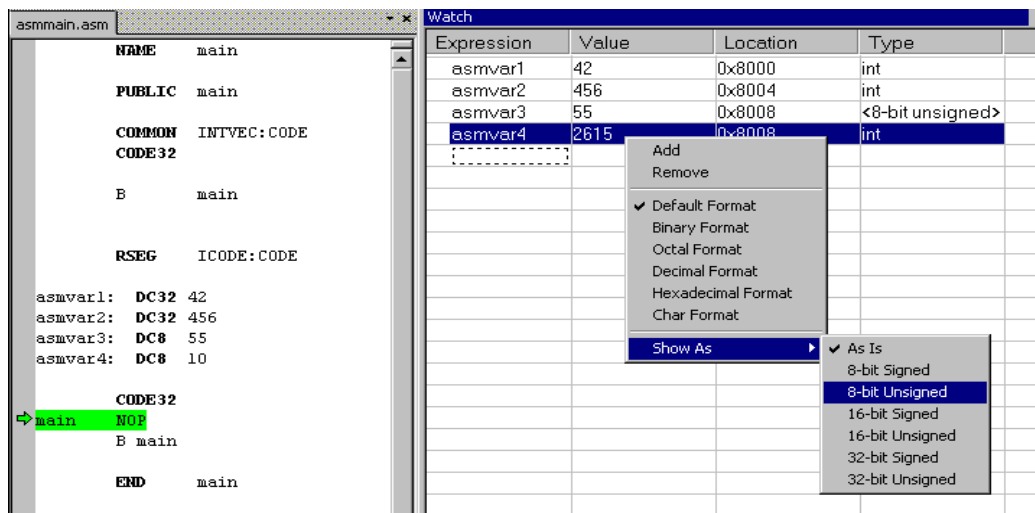


Figure 39: Viewing assembler variables in the Watch window

Note that `asmvar4` is displayed as an `int`, although the original assembler declaration probably intended for it to be a single byte quantity. From the context menu you can make C-SPY display the variable as, for example, an 8-bit unsigned variable. This has already been specified for the `asmvar3` variable.

Using breakpoints

This chapter describes the breakpoint system and different ways to create and monitor breakpoints.

The breakpoint system

The C-SPY® breakpoint system lets you set various kinds of breakpoints in the application you are debugging, allowing you to stop at locations of particular interest. You can set a breakpoint at a *code* location to investigate whether your program logic is correct, or to get trace printouts. In addition to code breakpoints, and depending on what C-SPY driver you are using, additional breakpoint types might be available. For example, you might be able to set a *data* breakpoint, to investigate how and when the data changes. If you are using the simulator driver you can also set *immediate* breakpoints.

All your breakpoints are listed in the *Breakpoints window* where you can conveniently monitor, enable, and disable them.

You can let the execution stop only under certain *conditions*, which you specify. It is also possible to let the breakpoint trigger a *side effect*, for instance executing a C-SPY macro function, without stopping the execution. The macro function can be defined to perform a wide variety of actions, for instance, simulating hardware behavior.

You can set breakpoints while you edit your code even if no debug session is active. The breakpoints will then be validated when the debug session starts. Breakpoints are preserved between debug sessions. C-SPY provides different ways of defining breakpoints.

All these possibilities provide you with a flexible tool for investigating the status of your application.

Defining breakpoints

The breakpoints you define will appear in the Breakpoints window. From this window you can conveniently view all breakpoints, enable and disable breakpoints, and open a dialog box for defining new breakpoints. For more details, see *Breakpoints window*, page 209.

Breakpoints are set with a higher precision than single lines, in analogy with the step mechanism; for more details about the step precision, see *Step*, page 114.

You can set a breakpoint in several different ways: using the **Toggle Breakpoint** command, from the Memory window, from a dialog box, or using predefined system macros. The different methods allow different levels of complexity and automation.

TOGGLING A SIMPLE CODE BREAKPOINT

Toggling a code breakpoint is a quick method of setting a breakpoint. The following methods are available both in the editor window and in the Disassembly window:



- Double-click in the gray left-side margin of the window
- Place the insertion point in the C source statement or assembler instruction where you want the breakpoint, and click the **Toggle Breakpoint** button in the toolbar
- Choose **Edit>Toggle Breakpoint**
- Right-click and choose **Toggle Breakpoint** from the context menu.

Breakpoint icons

A breakpoint is marked with an icon in the left margin of the editor window, and the icon is different for code and for log breakpoints:

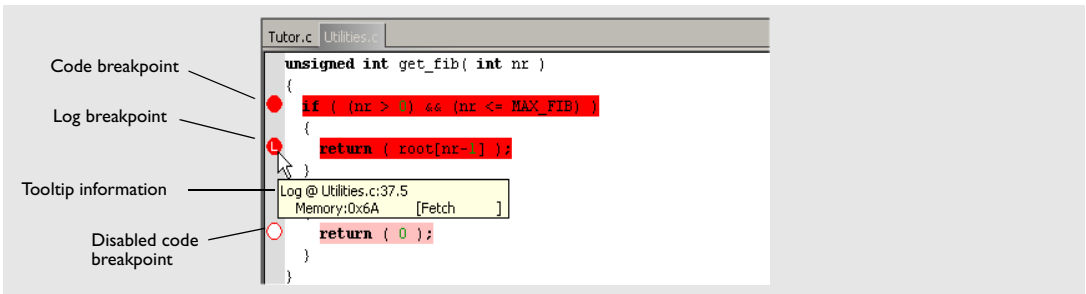


Figure 40: Breakpoint icons



If the breakpoint icon does not appear, make sure the option **Show bookmarks** is selected, see *Editor options*, page 244.



Just point at the breakpoint icon with the mouse pointer to get detailed tooltip information about all breakpoints set on the same location. The first row gives user breakpoint information, the following rows describe the physical breakpoints used for implementing the user breakpoint. The latter information can also be seen in the **Breakpoint Usage** dialog box.

Note: The breakpoint icons might look different for the C-SPY driver you are using. For more information about breakpoint icons, see the driver-specific documentation.

SETTING A BREAKPOINT IN THE MEMORY WINDOW

It is possible to set breakpoints directly on a memory location in the Memory window. Right-click in the window and choose the breakpoint command from the context menu that appears. To set the breakpoint on a range, select a portion of the memory contents.

The breakpoint is not highlighted; you can see, edit, and remove it by using the Breakpoints window, which is available from the **View** menu. The breakpoints you set in this window will be triggered for both read and write access. All breakpoints defined in the Memory window are preserved between debug sessions.

Setting different types of breakpoints in the Memory window is only supported if the driver you use supports these types of breakpoints.

DEFINING BREAKPOINTS USING THE DIALOG BOX

The advantage of using the dialog box is that it provides you with a graphical interface where you can interactively fine tune the characteristics of the breakpoints. You can set the options and quickly test whether the breakpoint works according to your intentions.

To define a new breakpoint:

- 1** Choose **View>Breakpoints** to open the Breakpoints window.
- 2** In the Breakpoints window, right-click to open the context menu.
- 3** On the context menu, choose **New Breakpoint**.
- 4** On the submenu, choose the breakpoint type you want to set. Depending on the C-SPY driver you are using, different breakpoint types might be available.

To modify an existing breakpoint:

- 1** Choose **View>Breakpoints** to open the Breakpoints window.
- 2** In the Breakpoints window, select the breakpoint you want to modify and right-click to open the context menu.
- 3** On the context menu, choose **Edit**.

A breakpoint dialog box appears. Specify the breakpoint settings and click **OK**. The breakpoint will be displayed in the Breakpoints window.

All breakpoints you define using a breakpoint dialog box are preserved between debug sessions.

For reference information about code and log breakpoints, see *Code breakpoints dialog box*, page 210 and *Log breakpoints dialog box*, page 212, respectively. For details about any additional breakpoint types, see the driver-specific documentation.



Tracing incorrect function arguments

If a function with a pointer argument is sometimes incorrectly called with a `NULL` argument, it is useful to put a breakpoint on the first line of the function with a condition that is true only when the parameter is 0. The breakpoint will then not be triggered until the problematic situation actually occurs.



Performing a task with or without stopping execution

You can perform a task when a breakpoint is triggered *with* or *without* stopping the execution.

You can use the **Action** text box to associate an action with the breakpoint, for instance a C-SPY macro function. When the breakpoint is triggered and the execution of your application has stopped, the macro function will be executed.

If you instead want to perform a task without stopping the execution, you can set a condition which returns 0 (false). When the breakpoint is triggered, the condition will be evaluated and since it is not true execution will continue.

Consider the following example where the C-SPY macro function performs a simple task:

```
__var my_counter;

count()
{
    my_counter += 1;
    return 0;
}
```

To use this function as a condition for the breakpoint, type `count()` in the **Expression** text box under **Conditions**. The task will then be performed when the breakpoint is triggered. Because the macro function `count` returns 0, the condition is false and the execution of the program will resume automatically, without any stop.

DEFINING BREAKPOINTS USING SYSTEM MACROS

You can define breakpoints not only by using the **Breakpoints** dialog box but also by using built-in C-SPY system macros. When you use macros for defining breakpoints, the breakpoint characteristics are specified as function parameters.

Macros are useful when you have already specified your breakpoints so that they fully meet your requirements. You can define your breakpoints in a macro file by using built-in system macros and execute the file at C-SPY startup. The breakpoints will then be set automatically each time you start C-SPY. Another advantage is that the debug session will be documented, and that several engineers involved in the development project can share the macro files.

If you use system macros for setting breakpoints it is still possible to view and modify them in the Breakpoints window. In contrast to using the dialog box for defining breakpoints, all breakpoints that are defined using system macros will be removed when you exit the debug session.

The following breakpoint macros are available:

```
__setCodeBreak
__setDataBreak
__setSimBreak
__clearBreak
```

For details of each breakpoint macro, see the chapter *C-SPY® macros reference*.

Defining breakpoints at C-SPY startup using a setup macro file

You can use a setup macro file to define breakpoints at C-SPY startup. Follow the procedure described in *Registering and executing using setup macros and setup files*, page 147.

Viewing all breakpoints

To view breakpoints, you can use the Breakpoints window and the **Breakpoints Usage** dialog box.

For information about the Breakpoints window, see *Breakpoints window*, page 209.

USING THE BREAKPOINT USAGE DIALOG BOX

The **Breakpoint Usage** dialog box—available from C-SPY driver-specific menus, for example the **Simulator** menu—lists all active breakpoints.

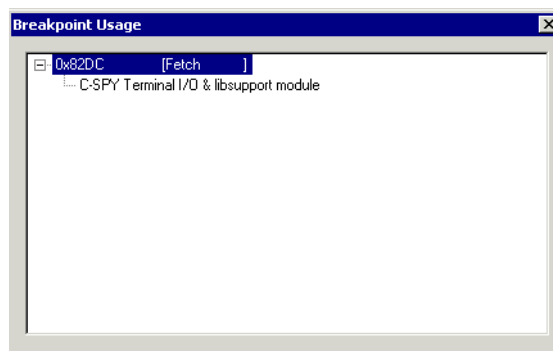


Figure 41: Breakpoint Usage dialog box

The **Breakpoint Usage** dialog box lists all breakpoints currently set in the target system, both the ones you have defined and the ones used internally by C-SPY. For each breakpoint in the list, the address and access type are shown. Each breakpoint can also be expanded to show its originator. The format of the items in this dialog box depends on which C-SPY driver you are using.

The dialog box gives a low-level view of all breakpoints, related but not identical to the list of breakpoints shown in the **Breakpoints** dialog box.

Exceeding the number of available low-level breakpoints will cause the debugger to single step. This will significantly reduce the execution speed. Therefore, in a debugger system with a limited amount of breakpoints, the **Breakpoint Usage** dialog box can be useful for:

- Identifying all consumers of breakpoints
- Checking that the number of active breakpoints is supported by the target system
- Configuring the debugger to utilize the available breakpoints in a better way, if possible.

For information about the available number of breakpoints in the debugger system you are using and how to use the available breakpoints in a better way, see the section about breakpoints in the part of this book that corresponds to the debugger system you are using.

Breakpoint consumers

There are several consumers of breakpoints in a debugger system.

User breakpoints—the breakpoints you define by using the **Breakpoints** dialog box or by toggling breakpoints in the editor window—often consume one low-level breakpoint each, but this can vary greatly. Some user breakpoints consume several low-level breakpoints and conversely, several user breakpoints can share one low-level breakpoint. User breakpoints are displayed in the same way both in the **Breakpoint Usage** dialog box and in the Breakpoints window, for example `Data @[R] callCount`.

C-SPY itself also consumes breakpoints. C-SPY will set a breakpoint if:

- the C-SPY option **Run to** has been selected, and any step command is used. These are temporary breakpoints which are only set when the debugger system is running. This means that they are not visible in the Breakpoint Usage window.
- the linker options **With I/O emulation modules** has been selected.

These types of breakpoint consumers are displayed in the **Breakpoint Usage** dialog box, for example, C-SPY Terminal I/O & libsupport module.

C-SPY plugin modules, for example modules for real-time operating systems, can consume additional breakpoints. Specifically, by default the Stack window consumes a breakpoint. To disable the breakpoint used by the Stack window:

- Choose **Tools>Options>Stack**.
- Deselect the **Stack pointer(s) not valid until program reaches: *label*** option.

Monitoring memory and registers

This chapter describes how to use the features available in the IAR C-SPY® Debugger for examining memory and registers.

Memory addressing

In C-SPY, the term *zone* is used for a named memory area. A memory address, or *location*, is a combination of a zone and a numerical offset into that zone. Memory zones are used in several contexts, perhaps most importantly in the Memory and Disassembly windows. The **Zone** box in these windows allows you to choose which memory zone to display.

Memory zones are defined in the device description files. For further information, see *Selecting a device description file*, page 110.

Windows for monitoring memory and registers

C-SPY provides many windows for monitoring memory and registers, each of them available from the **View** menu:

- The Memory window
Gives an up-to-date display of a specified area of memory—a memory zone—and allows you to edit it. Different colors are used for indicating data coverage along with execution of your application. You can fill specified areas with specific values and you can set breakpoints directly on a memory location or range. You can open several instances of this window, to monitor different memory areas.
- The Symbolic memory window
Displays how variables with static storage duration are laid out in memory. This can be useful for better understanding memory usage or for investigating problems caused by variables being overwritten, for example by buffer overruns.
- The Stack window
Displays the contents of the stack, including how stack variables are laid out in memory. In addition, some integrity checks of the stack can be performed to detect and warn about problems with stack overflow. For example, the Stack window is useful for determining the optimal size of the stack.

- Gives an up-to-date display of the contents of the processor registers and SFRs, and allows you to edit them.

USING THE MEMORY WINDOW

[illegible]

The display area shows the addresses currently being viewed, the memory contents in the format you have chosen, and the memory contents in ASCII format. You can edit the contents of the Memory window, both in the hexadecimal part and the ASCII part of the window.

USING THE STACK WINDOW

Before you can open the Stack window you must make sure it is enabled; Choose **Project>Options>Debugger>Plugins** and select **Stack** from the list of plugins. In C-SPY, you can then open a Stack window by choosing **View>Stack**. You can open

several instances of the Stack window, each showing a different stack—if several stacks are available—or the same stack with different display settings.

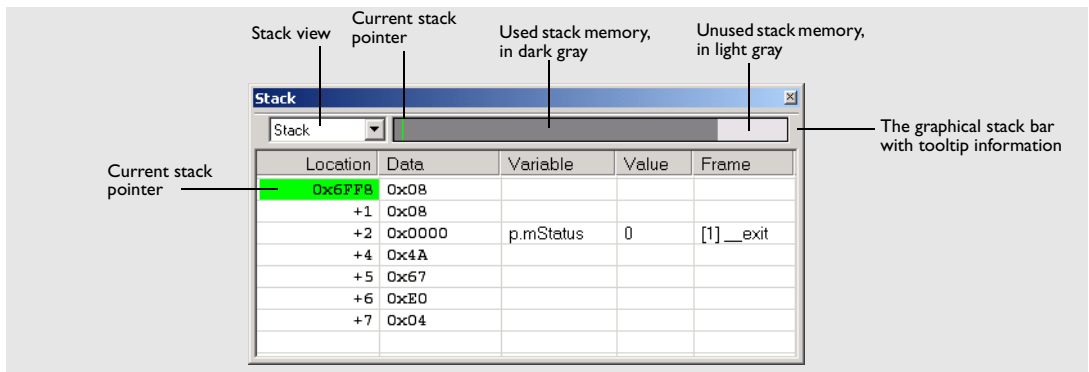


Figure 43: Stack window

For detailed reference information about the Stack window, and the method used for computing the stack usage and its limitations, see *Stack window*, page 293. For reference information about the options specific to the window, see *Stack options*, page 257.



Place the mouse pointer over the stack bar to get tool tip information about stack usage.

Detecting stack overflows

If you have selected the option **Enable stack checks**, available by choosing **Tools>Options>Stack**, you have also enabled the functionality needed to detect stack overflows. This means that C-SPY can issue warnings for stack overflow when the application stops executing. Warnings are issued either when the stack usage exceeds a threshold that you can specify, or when the stack pointer is outside the stack memory range.

Viewing the stack contents

The display area of the Stack window shows the contents of the stack, which can be useful in many contexts. Some examples are:

- Investigating the stack usage when assembler modules are called from C modules and vice versa
- Investigating whether the correct elements are located on the stack
- Investigating whether the stack is restored properly.

WORKING WITH REGISTERS

The Register window gives an up-to-date display of the contents of the processor registers and special function registers, and allows you to edit them.

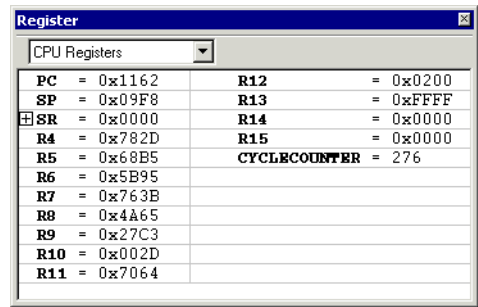


Figure 44: Register window

Every time C-SPY stops, a value that has changed since the last stop is highlighted. To edit the contents of a register, click it, and modify the value. Some registers can be expanded to show individual bits or subgroups of bits.

You can change the display format by changing the **Base** setting on the **Register Filter** page—available by choosing **Tools>Options**.

Register groups

Due to the large amount of registers—memory-mapped peripheral unit registers and CPU registers—it is inconvenient to show all registers concurrently in the Register window. Instead you can divide registers into *register groups*. By default there is only one register group in the debugger: **CPU Registers**.

In addition to the **CPU Registers** there are additional register groups predefined in the device description files—available in the `cpuname\config` directory—that make all SFR registers available in the register window. The device description file contains a section that defines the special function registers and their groups.

You can select which register group to display in the Register window using the drop-down list. You can conveniently keep track of different register groups simultaneously, as you can open several instances of the Register window.

Enabling predefined register groups

To use any of the predefined register groups, select a device description file that suits your device, see *Selecting a device description file*, page 110.

The available register groups will be listed on the **Register Filter** page available if you choose the **Tools>Options** command when C-SPY is running.

Defining application-specific groups

In addition to the predefined register groups, you can create your own register groups that better suit the use of registers in your application.

To define new register groups, choose **Tools>Options** and click the **Register Filter** tab. This page is only available when the IAR C-SPY Debugger is running.

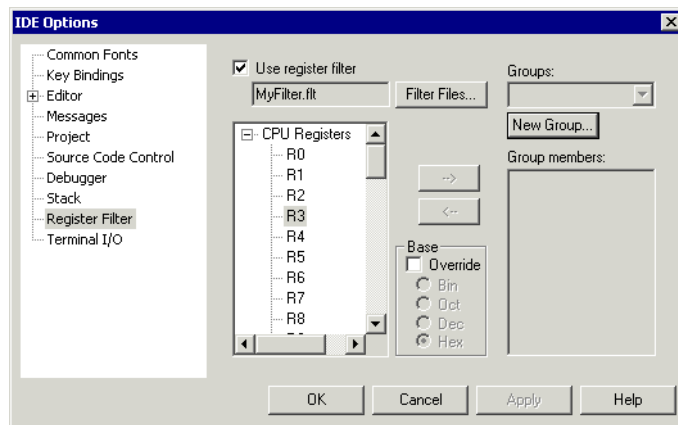


Figure 45: Register Filter page

For reference information about this dialog box, see *Register Filter options*, page 259.

Using the C-SPY® macro system

The IAR C-SPY Debugger includes a comprehensive macro system which allows you to automate the debugging process and to simulate peripheral devices. Macros can be used in conjunction with complex breakpoints and interrupt simulation to perform a wide variety of tasks.

This chapter describes the macro system, its features, for what purpose these features can be used, and how to use them.

The macro system

C-SPY macros can be used solely or in conjunction with complex breakpoints and interrupt simulation to perform a wide variety of tasks. Some examples where macros can be useful:

- Automating the debug session, for instance with trace printouts, printing values of variables, and setting breakpoints.
- Hardware configuring, such as initializing hardware registers.
- Developing small debug utility functions, for instance calculating the stack depth.
- Simulating peripheral devices, see the chapter *Simulating interrupts*. This only applies if you are using the simulator driver.

The macro system has several features:

- The similarity between the *macro language* and the C language, which lets you write your own macro functions.
- Predefined *system macros* which perform useful tasks such as opening and closing files, setting breakpoints and defining simulated interrupts.
- Reserved *setup macro functions* which can be used for defining at which stage the macro function should be executed. You define the function yourself, in a *setup macro file*.
- The option of collecting your macro functions in one or several *macro files*.
- A *dialog box* where you can view, register, and edit your macro functions and files. Alternatively, you can register and execute your macro files and functions using either the setup functionality or system macros.

Many C-SPY tasks can be performed either by using a dialog box or by using macro functions. The advantage of using a dialog box is that it provides you with a graphical interface where you can interactively fine-tune the characteristics of the task you want to perform, for instance setting a breakpoint. You can add parameters and quickly test whether the breakpoint works according to your intentions.

Macros, on the other hand, are useful when you already have specified your breakpoints so that they fully meet your requirements. You can set up your simulator environment automatically by writing a macro file and executing it, for instance when you start C-SPY. Another advantage is that the debug session will be documented, and if there are several engineers involved in the development project you can share the macro files within the group.

THE MACRO LANGUAGE

The syntax of the macro language is very similar to the C language. There are *macro statements*, which are similar to C statements. You can define *macro functions*, with or without parameters and return values. You can use built-in system macros, similar to C library functions. Finally, you can define global and local *macro variables*. For a detailed description of the macro language components, see *The macro language*, page 361.

Example

Consider this example of a macro function which illustrates the different components of the macro language:

```
CheckLatest(value)
{
    oldvalue;
    if (oldvalue != value)
    {
        __message "Message: Changed from ", oldvalue, " to ", value;
        oldvalue = value;
    }
}
```

Note: Reserved macro words begin with double underscores to prevent name conflicts.

THE MACRO FILE

You collect your macro variables and functions in one or several macro files. To define a macro variable or macro function, first create a text file containing the definition. You can use any suitable text editor, such as the editor supplied with the IAR Embedded Workbench IDE. Save the file with a suitable name using the filename extension `mac`.

Setup macro file

It is possible to load a macro file at C-SPY startup; such a file is called a *setup macro file*. This is especially convenient if you want to make C-SPY perform actions before you load your application software, for instance to initialize some CPU registers or memory-mapped peripheral units. Other reasons might be if you want to automate the initialization of C-SPY, or if you want to register multiple setup macro files. An example of a C-SPY setup macro file `SetupSimple.mac` can be found in the `cpuname\tutor` directory.

For information about how to load a setup macro file, see *Registering and executing using setup macros and setup files*, page 147. For an example of how to use setup macro files, see the chapter *Simulating an interrupt* in *Part 2. Tutorials*.

SETUP MACRO FUNCTIONS

The *setup macro functions* are reserved macro function names that will be called by C-SPY at specific stages during execution. The stages to choose between are:

- After communication with the target system has been established but before downloading the application software
- Once after your application software has been downloaded
- Each time the reset command is issued
- Once when the debug session ends.

To define a macro function to be called at a specific stage, you should define and register a macro function with the name of a setup macro function. For instance, if you want to clear a specific memory area before you load your application software, the macro setup function `execUserPreload` is suitable. This function is also suitable if you want to initialize some CPU registers or memory mapped peripheral units before you load your application software. For detailed information about each setup macro function, see *Setup macro functions summary*, page 366.

As with any macro function, you collect your setup macro functions in a macro file. Because many of the setup macro functions execute before `main` is reached, you should define these functions in a *setup macro file*.

Using C-SPY macros

If you decide to use C-SPY macros, you first need to create a macro file in which you define your macro functions. C-SPY needs to know that you intend to use your defined macro functions, and thus you must *register* (load) your macro file. During the debug session you might need to list all available macro functions as well as execute them.

To list the registered macro functions, you can use the **Macro Configuration** dialog box. There are various ways to both register and execute macro functions:

- You can register a macro interactively by using the **Macro Configuration** dialog box.
- You can register and execute macro functions at the C-SPY startup sequence by defining setup macro functions in a setup macro file.
- A file containing macro function definitions can be registered using the system macro `__registerMacroFile`. This means that you can dynamically select which macro files to register, depending on the runtime conditions. Using the system macro also lets you register multiple files at the same moment. For details about the system macro, see *__registerMacroFile*, page 376.
- The Quick Watch window lets you evaluate expressions, and can thus be used for executing macro functions.
- A macro can be connected to a breakpoint; when the breakpoint is triggered the macro will be executed.

USING THE MACRO CONFIGURATION DIALOG BOX

The **Macro Configuration** dialog box—available by choosing **Debug>Macros**—lets you list, register, and edit your macro files and functions. The dialog box offers you an interactive interface for registering your macro functions which is convenient when you develop macro functions and continuously want to load and test them.

Macro functions that have been registered using the dialog box will be deactivated when you exit the debug session, and will not automatically be registered at the next debug session.

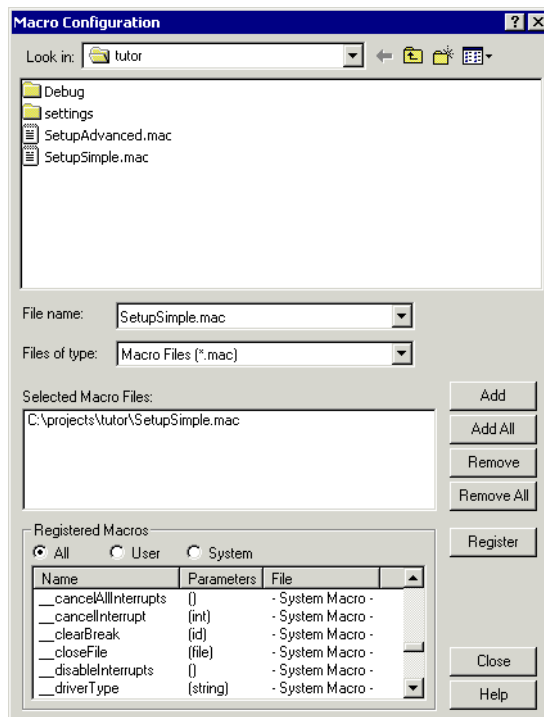


Figure 46: Macro Configuration dialog box

For reference information about this dialog box, see *Macro Configuration dialog box*, page 299.

REGISTERING AND EXECUTING USING SETUP MACROS AND SETUP FILES

It can be convenient to register a macro file during the C-SPY startup sequence, especially if you have several ready-made macro functions. C-SPY can then execute the macros before `main` is reached. You achieve this by specifying a macro file which you load before starting the debugger. Your macro functions will be automatically registered each time you start the C-SPY Debugger.

If you define the macro functions by using the setup macro function names you can define exactly at which stage you want the macro function to be executed.

Follow these steps:

- 1 Create a new text file where you can define your macro function.

For example:

```
execUserSetup()
{
    ...
    __registerMacroFile("MyMacroUtils.mac");
    __registerMacroFile("MyDeviceSimulation.mac");
}
```

This macro function registers the macro files `MyMacroUtils.mac` and `MyDeviceSimulation.mac`. Because the macro function is defined with the `execUserSetup` function name, it will be executed directly after your application has been downloaded.

- 2 Save the file using the filename extension `mac`.
- 3 Before you start C-SPY, choose **Project>Options** and click the **Setup** tab in the **Debugger** category. Select the check box **Use Setup file** and choose the macro file you just created.

The interrupt macro will now be loaded during the C-SPY startup sequence.

EXECUTING MACROS USING QUICK WATCH

The Quick Watch window—available from the **View** menu—lets you watch the value of any variables or expressions and evaluate them. For macros, the Quick Watch window is especially useful because it is a method which lets you dynamically choose when to execute a macro function.

Consider the following simple macro function which checks the status of a watchdog timer interrupt enable bit:

```
WDTstatus()
{
    if (#WDreg & 0x01 != 0) /* Checks the status of WDTIE */
        return "Timer enabled"; /* C-SPY macro string used */
    else
        return "Timer disabled"; /* C-SPY macro string used */
}
```

- 1 Save the macro function using the filename extension `mac`. Keep the file open.
- 2 To register the macro file, choose **Debug>Macros**. The **Macro Configuration** dialog box appears. Locate the file, click **Add** and then **Register**. The macro function appears in the list of registered macros.

- 3 In the macro file editor window, select the macro function name `WDTstatus`. Right-click, and choose **Quick Watch** from the context menu that appears.

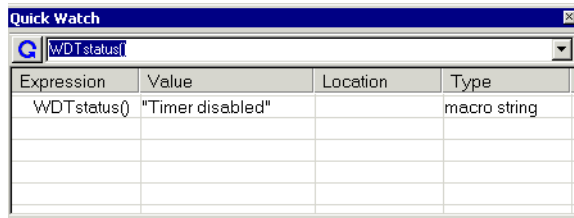


Figure 47: Quick Watch window

The macro will automatically be displayed in the Quick Watch window.

Click **Close** to close the window.

EXECUTING A MACRO BY CONNECTING IT TO A BREAKPOINT

You can connect a macro to a breakpoint. The macro will then be executed at the time when the breakpoint is triggered. The advantage is that you can stop the execution at locations of particular interest and perform specific actions there.

For instance, you can easily produce log reports containing information such as how the values of variables, symbols, or registers changes. To do this you might set a breakpoint on a suspicious location and connect a log macro to the breakpoint. After the execution you can study how the values of the registers have changed.

For an example of how to create a log macro and connect it to a breakpoint, follow these steps:

- 1 Assume this skeleton of a C function in your application source code:

```
int fact(int x)
{
    ...
}
```

- 2 Create a simple log macro function like this example:

```
logfact()
{
    __message "fact(" , x, " )";
}
```

The `__message` statement will log messages to the Log window.

Save the macro function in a macro file, with the filename extension `mac`.

- 3 Before you can execute the macro it must be registered. Open the **Macro Configuration** dialog box—available by choosing **Debug>Macros**—and add your macro file to the list **Selected Macro Files**. Click **Register** and your macro function will appear in the list **Registered Macros**. Close the dialog box.
- 4 Next, you should toggle a code breakpoint—using the **Toggle Breakpoint** button—on the first statement within the function `fact` in your application source code. Open the **Breakpoint** dialog box—available by choosing **Edit>Breakpoints**—your breakpoint will appear in the list of breakpoints at the bottom of the dialog box. Select the breakpoint.
- 5 Connect the log macro function to the breakpoint by typing the name of the macro function, `logfact()`, in the **Action** field and clicking **Apply**. Close the dialog box.
- 6 Now you can execute your application source code. When the breakpoint has been triggered, the macro function will be executed. You can see the result in the Log window.

You can easily enhance the log macro function by, for instance, using the `__fmessage` statement instead, which will print the log information to a file. For information about the `__fmessage` statement, see *Formatted output*, page 364.

For a complete example where a serial port input buffer is simulated using the method of connecting a macro to a breakpoint, see the chapter *Simulating an interrupt* in *Part 2. Tutorials*.

Analyzing your application

It is important to locate an application's bottle-necks and to verify that all parts of an application have been tested. This chapter presents facilities available in the IAR C-SPY® Debugger for analyzing your application so that you can efficiently spend time and effort on optimizations.

Function-level profiling

The profiler will help you find the functions where most time is spent during execution, for a given stimulus. Those functions are the parts you should focus on when spending time and effort on optimizing your code. A simple method of optimizing a function is to compile it using speed optimization. Alternatively, you can move the function into the memory which uses the most efficient addressing mode. For detailed information about efficient memory usage, see the *IAR C/C++ Compiler Reference Guide*.

The Profiling window displays profiling information, that is, timing information for the functions in an application. Profiling must be turned on explicitly using a button on the window's toolbar, and will stay active until it is turned off.

The profiler measures the time between the entry and return of a function. This means that time consumed in a function is not added until the function returns or another function is called. You will only notice this if you are stepping into a function.

For reference information about the Profiling window, see *Profiling window*, page 292.

USING THE PROFILER

Before you can use the Profiling window, you must build your application using the following options:

Category	Setting
C/C++ Compiler	Output>Generate debug information
Linker	Format>Debug information for C-SPY
Debugger	Plugins>Profiling

Table 11: Project options for enabling profiling




- 1 After you have built your application and started C-SPY, choose **View>Profiling** to open the window, and click the **Activate** button to turn on the profiler.



- 2 Click the **Clear** button, alternatively use the context menu available by right-clicking in the window, when you want to start a new sampling.



- 3 Start the execution. When the execution stops, for instance because the program exit is reached or a breakpoint is triggered, click the **Refresh** button.

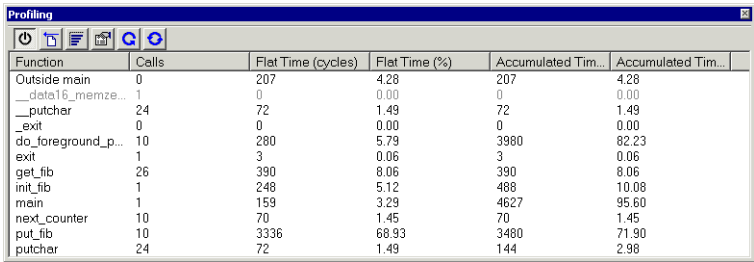

Function	Calls	Flat Time (cycles)	Flat Time (%)	Accumulated Tim...	Accumulated Tim...
Outside main	0	207	4.28	207	4.28
__data16_memze...	1	0	0.00	0	0.00
__putchar	24	72	1.49	72	1.49
__exit	0	0	0.00	0	0.00
do_foreground_p...	10	280	5.79	3980	82.23
exit	1	3	0.06	3	0.06
get_fib	26	390	8.06	390	8.06
init_fib	1	248	5.12	488	10.08
main	1	159	3.29	4627	95.60
next_counter	10	70	1.45	70	1.45
put_fib	10	3336	68.93	3480	71.90
putchar	24	72	1.49	144	2.98

Figure 48: Profiling window

Profiling information is displayed in the window.

Viewing the figures

Clicking on a column header sorts the entire list according to that column.

A dimmed item in the list indicates that the function has been called by a function which does not contain source code (compiled without debug information). When a function is called by functions that do not have their source code available, such as library functions, no measurement in time is made.

There is always an item in the list called Outside main. This is time that cannot be placed in any of the functions in the list. That is, code compiled without debug information, for instance, all startup and exit code, and C/C++ library code.



Clicking the **Graph** button toggles the percentage columns to be displayed either as numbers or as bar charts.

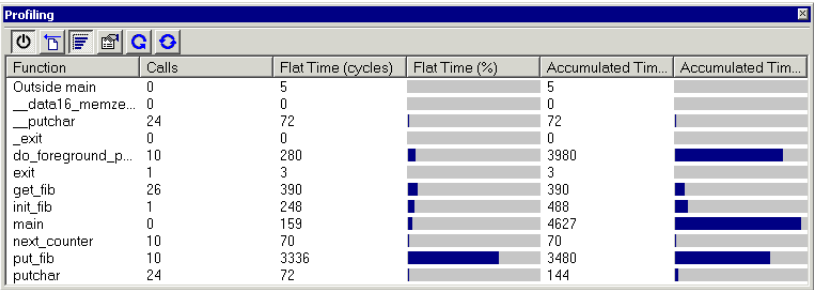


Figure 49: Graphs in Profiling window



Clicking the **Show details** button displays more detailed information about the function selected in the list. A window is opened showing information about callers and callees for the selected function:

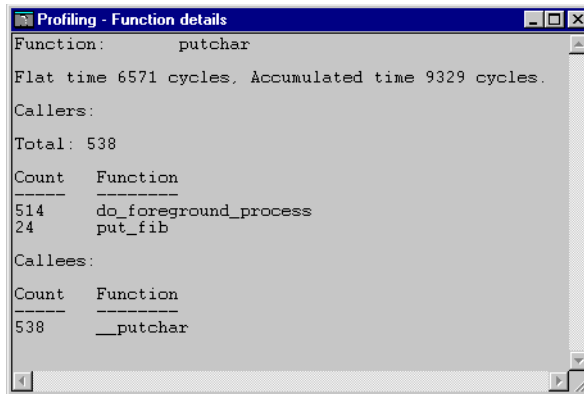


Figure 50: Function details window

Producing reports

To produce a report, right-click in the window and choose the **Save As** command on the context menu. The contents of the Profiling window will be saved to a file.

Code coverage

The code coverage functionality helps you verify whether all parts of your code have been executed. This is useful when you design your test procedure to make sure that all parts of the code have been executed. It also helps you identify parts of your code that are not reachable.

USING CODE COVERAGE

The Code Coverage window—available from the **View** menu—reports the status of the current code coverage analysis, that is, what parts of the code have been executed at least once since the start of the analysis. The compiler generates detailed stepping information in the form of *step points* at each statement, as well as at each function call. The report includes information about all modules and functions. It reports the amount of all step points, in percentage, that have been executed and lists all step points that have not been executed up to the point where the application has been stopped. The coverage will continue until turned off.

For reference information about the Code Coverage window, see *Code Coverage window*, page 290.

Before using the Code Coverage window you must build your application using the following options:

Category	Setting
C/C++ Compiler	Output>Generate debug information
Linker	Format>Debug information for C-SPY
Debugger	Plugins>Code Coverage

Table 12: Project options for enabling code coverage



After you have built your application and started C-SPY, choose **View>Code Coverage** to open the Code Coverage window and click **Activate** to switch on the code coverage analyzer. The following window will be displayed:

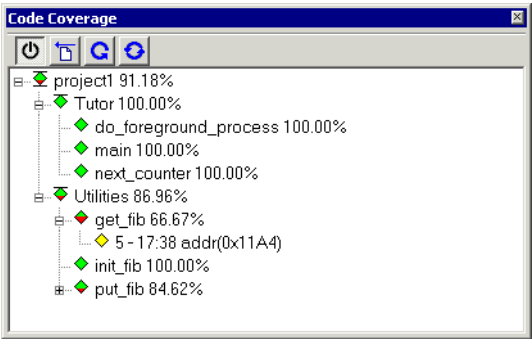


Figure 51: Code Coverage window

Viewing the figures

The code coverage information is displayed in a tree structure, showing the program, module, function and step point levels. The plus sign and minus sign icons allow you to expand and collapse the structure.

The following icons are used to give you an overview of the current status on all levels:

- A red diamond signifies that 0% of the code has been executed
- A green diamond signifies that 100% of the code has been executed
- A red and green diamond signifies that some of the code has been executed
- A yellow diamond signifies a step point that has not been executed.

The percentage displayed at the end of every program, module and function line shows the amount of code that has been covered so far, that is, the number of executed step points divided with the total number of step points.

For step point lines, the information displayed is the column number range and the row number of the step point in the source window, followed by the address of the step point.

```
<column start>--<column end>:row.
```

A step point is considered to be executed when one of its instructions has been executed. When a step point has been executed, it is removed from the window.

Double-clicking a step point or a function in the Code Coverage window displays that step point or function as the current position in the source window, which becomes the active window. Double-clicking a module on the program level expands or collapses the tree structure.

An asterisk (*) in the title bar indicates that C-SPY has continued to execute, and that the Code Coverage window needs to be refreshed because the displayed information is no longer up to date. To update the information, use the **Refresh** command.

What parts of the code are displayed?

The window displays only statements that have been compiled with debug information. Thus, startup code, exit code and library code will not be displayed in the window. Furthermore, coverage information for statements in inlined functions will not be displayed. Only the statement containing the inlined function call will be marked as executed.


Producing reports

To produce a report, right-click in the window and choose the **Save As** command on the context menu. The contents of the Code Coverage window will be saved to a file.

Part 5. IAR C-SPY® Simulator

This part of the IAR Embedded Workbench® IDE User Guide contains the following chapters:

- Simulator-specific debugging
- Simulating interrupts.





Simulator-specific debugging

In addition to the general C-SPY® features, the C-SPY Simulator provides some simulator-specific features, which are described in this chapter.

You will get reference information, as well as information about driver-specific characteristics, such as memory access checking and breakpoints.

The IAR C-SPY Simulator introduction

The IAR C-SPY Simulator simulates the functions of the target processor entirely in software, which means the program logic can be debugged long before any hardware is available. As no hardware is required, it is also the most cost-effective solution for many applications.

FEATURES

In addition to the general features listed in the chapter *Product introduction*, the IAR C-SPY Simulator also provides:

- Instruction-accurate simulated execution
- Memory configuration and validation
- Interrupt simulation
- Immediate breakpoints with resume functionality
- Peripheral simulation (using the C-SPY macro system).

SELECTING THE SIMULATOR DRIVER

Before starting the IAR C-SPY Debugger you must choose the simulator driver. In the IAR Embedded Workbench IDE, choose **Project>Options** and click the **Setup** tab in the **Debugger** category. Choose **Simulator** from the **Driver** drop-down list.

Depending on your product version, the list might or might not contain hardware drivers. You can only choose a driver you have installed on your computer.

Simulator-specific menus

When you use the simulator driver, the **Simulator** menu is added in the menu bar.

SIMULATOR MENU




Figure 52: Simulator menu

The **Simulator** menu contains the following commands:

Menu command	Description
Interrupt Setup	Displays a dialog box to allow you to configure C-SPY interrupt simulation; see <i>Interrupt Setup dialog box</i> , page 180.
Forced Interrupts	Displays a window from which you can trigger an interrupt; see <i>Forced interrupt window</i> , page 183.
Interrupt Log	Displays a window which shows the status of all defined interrupts; see <i>Interrupt Log window</i> , page 185.
Memory Access Setup	Displays a dialog box to simulate memory access checking by specifying memory areas with different access types; see <i>Memory Access setup dialog box</i> , page 166.
Trace	Opens the Trace window with the recorded trace data; see <i>Trace window</i> , page 161.
Function Trace	Opens the Function Trace window with the trace data for which functions were called or returned from; see <i>Function Trace window</i> , page 162.
Breakpoint Usage	Displays the Breakpoint Usage dialog box which lists all active breakpoints; see <i>Breakpoint Usage dialog box</i> , page 175.

Table 13: Description of Simulator menu commands

Using the trace system in the simulator

In the C-SPY simulator, a *trace* is a recorded sequence of executed machine instructions. In addition, you can record the values of C-SPY expressions by selecting the expressions in the Trace Expressions window. The Function Trace window only shows trace data

corresponding to calls to and returns from functions, whereas the Trace window displays all instructions.

For more detailed information about using the common features in the trace system, see *Using the trace system*, page 125.

TRACE WINDOW

The Trace window—available from the **Simulator** menu—displays a recorded sequence of executed machine instructions. In addition, the window can display trace data for expressions.

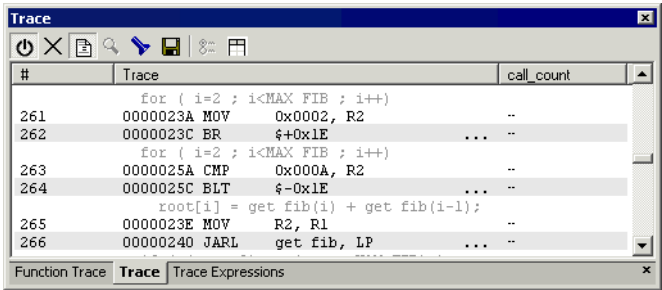


Figure 53: Trace window

C-SPY generates trace information based on the location of the program counter.

The Trace window contains the following columns:

Trace window column	Description
#	A serial number for each row in the trace buffer. Simplifies the navigation within the buffer.
Trace	The recorded sequence of executed machine instructions. Optionally, the corresponding source code can also be displayed.
Expression	Each expression you have defined to be displayed appears in a separate column. Each entry in the expression column displays the value <i>after</i> executing the instruction on the same row. You specify the expressions for which you want to record trace information in the Trace Expressions window; see <i>Trace Expressions window</i> , page 163.

Table 14: Trace window columns

For more information about using the trace system, see *Using the trace system*, page 125.

TRACE TOOLBAR

The Trace toolbar is available in the Trace window and in the Function trace window:




Figure 54: Trace toolbar

The following function buttons are available on the toolbar:









Toolbar button	Description
	Enable/Disable
	Clear trace data
	Toggle Source
	Browse
	Find
	Save
	Edit Settings
	Edit Expressions

Table 15: Trace toolbar commands

FUNCTION TRACE WINDOW

The Function Trace window—available from the **Simulator** menu—displays a subset of the trace data displayed in the Trace window. Instead of displaying all rows, the

Function Trace window only shows trace data corresponding to calls to and returns from functions.

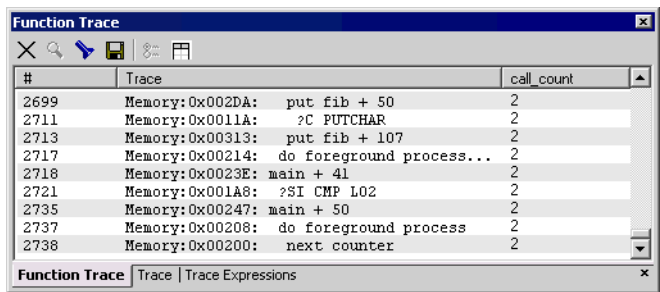


Figure 55: Function Trace window

For information about the toolbar, see *Trace toolbar*, page 162.

For more information about using the trace system, see *Using the trace system*, page 125.

TRACE EXPRESSIONS WINDOW

In the Trace Expressions window—available from the Trace window toolbar—you can specify specific expressions for which you want to record trace information.

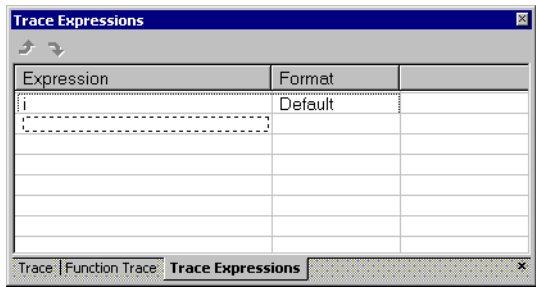


Figure 56: Trace Expressions window

In the **Expression** column, you specify any expression you want to be recorded. You can specify any expression that can be evaluated, such as variables and registers.

The **Format** column shows which display format is used for each expression.

Each row in this window will appear as an extra column in the Trace window.

For more information about using the trace system, see *Using the trace system*, page 125.

Use the toolbar buttons to change the order between the expressions:

Toolbar button	Description
Arrow up	Moves the selected row up
Arrow down	Moves the selected row down

Table 16: Toolbar buttons in the Trace Expressions window

FIND IN TRACE WINDOW

The Find In Trace window—available from the **View>Messages** menu—displays the result of searches in the trace data.

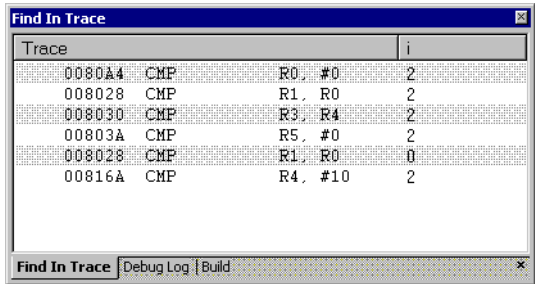


Figure 57: Find In Trace window

The Find in Trace window looks like the Trace window, showing the same columns and data, but *only* those rows that match the specified search criteria. Double-clicking an item in the Find in Trace window brings up the same item in the Trace window.

You specify the search criteria in the **Find In Trace** dialog box. For information about how to open this dialog box, see *Find in Trace dialog box*, page 164.

For more information about using the trace system, see *Using the trace system*, page 125.

FIND IN TRACE DIALOG BOX

Use the **Find in Trace** dialog box—available by choosing **Edit>Find and Replace>Find** or from the Trace window toolbar—to specify the search criteria for advanced searches in the trace data. Note that the **Edit>Find and Replace>Find** command is context-dependent. It displays the **Find in Trace** dialog box if the Trace

window is the current window or the **Find** dialog box if the editor window is the current window.

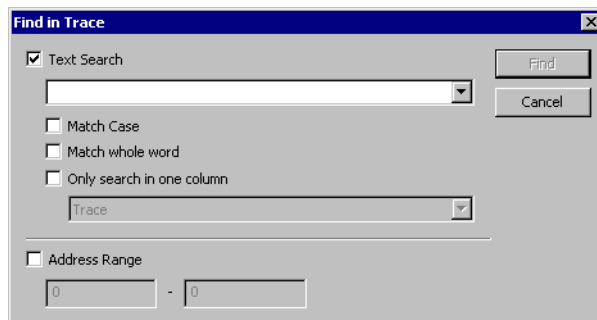


Figure 58: Find in Trace dialog box

The search results are displayed in the Find In Trace window—available by choosing the **View>Messages** command, see *Find In Trace window*, page 164.

In the **Find in Trace** dialog box, you specify the search criteria with the following settings:

Text search

A text field where you type the string you want to search for. Use the following options to fine-tune the search:

- Match Case** Searches only for occurrences that exactly match the case of the specified text. Otherwise specifying `int` will also find `INT` and `Int`.
- Match whole word** Searches only for the string when it occurs as a separate word. Otherwise `int` will also find `print`, `sprintf` and so on.
- Only search in one column** Searches only in the column you selected from the drop-down menu.

Address Range

Use the text fields to specify an address range. The trace data within the address range is displayed. If you also have specified a text string in the **Text search** field, the text string will be searched for within the address range.

For more information about using the trace system, see *Using the trace system*, page 125.

Memory access checking

C-SPY can simulate different memory access types of the target hardware and detect illegal accesses, for example a read access to write-only memory. If a memory access occurs that does not agree with the access type specified for the specific memory area, C-SPY will regard this as an illegal access. The purpose of memory access checking is to help you to identify any memory access violations.

The memory areas can either be the zones predefined in the device description file, or memory areas based on the segment information available in the debug file. In addition to these, you can define your own memory areas. The access type can be read and write, read only, or write only. It is not possible to map two different access types to the same memory area. You can choose between checking access type violation or checking accesses to unspecified ranges. Any violations are logged in the Debug Log window. You can also choose to have the execution halted.

In addition, you can specify the cost—in cycles—associated with accessing a byte in the memory during execution. The costs for read and write accesses are specified separately, because they can differ. These costs will be added to the cycle counter whenever a byte is accessed.

In addition, you can specify the cost—in cycles—associated with accessing a memory entity during execution. The size of the memory entity depends on the bus width. The costs for read and write accesses are specified separately, because they can differ. You can also specify costs separately for sequential and non-sequential memory accesses. These costs will be added to the cycle counter whenever a byte is accessed. These additional features related to specifying the cost might, or might not, be included in your product version.

Choose **Simulator>Memory Access Setup** to open the **Memory Access Setup** dialog box.

MEMORY ACCESS SETUP DIALOG BOX

The **Memory Access Setup** dialog box—available from the **Simulator** menu—lists all defined memory areas, where each column in the list specifies the properties of the area.

In other words, the dialog box displays the memory access setup that will be used during the simulation.

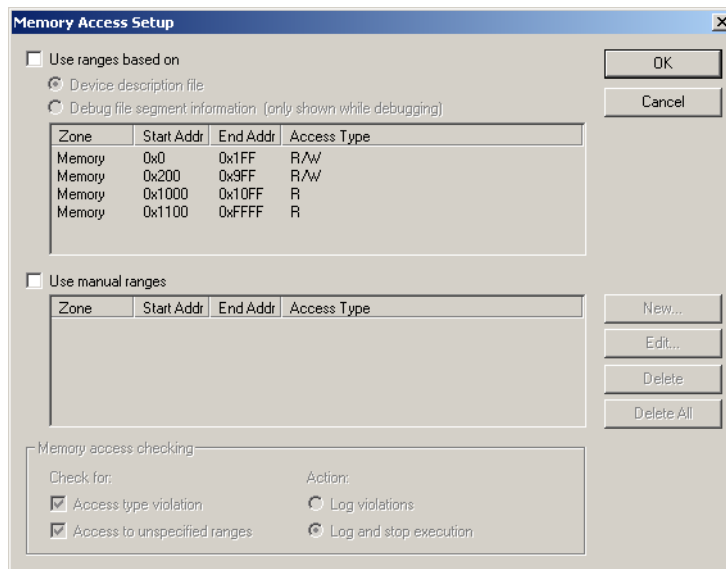


Figure 59: Memory Access Setup dialog box

Note: If you enable both the **Use ranges based on** and the **Use manual ranges** option, memory accesses will be checked for all defined ranges.

For information about the columns and the properties displayed, see *Edit Memory Access dialog box*, page 169.

Use ranges based on

Use the **Use ranges based on** option to choose any of the predefined alternatives for the memory access setup. You can choose between:

- **Device description file**, which means the properties will be loaded from the device description file
- **Debug file segment information**, which means the properties will be based on the segment information available in the debug file. This information is only available while debugging. The advantage of using this option, is that the simulator can catch memory accesses outside the linked application.

Use manual ranges

Use the **Use manual ranges** option to specify your own ranges manually via the **Edit Memory Access** dialog box. To open this dialog box, choose **New** to specify a new memory range, or select a memory zone and choose **Edit** to modify it. For more details, see *Edit Memory Access dialog box*, page 169.

The ranges you define manually are saved between debug sessions.

Memory access checking

Use the **Check for** options to specify what to check for. Choose between:

- Access type violation
- Access to unspecified ranges.

Use the **Action** options to specify the action to be performed if there is an access violation. Choose between:

- Log violations
- Log and stop execution.

Any violations are logged in the Debug Log window.

Buttons

The **Memory Access Setup** dialog box contains the following buttons:

Button	Description
OK	Standard OK.
Cancel	Standard Cancel.
New	Opens the Edit Memory Access dialog box, where you can specify a new memory range and attach an access type to it; see <i>Edit Memory Access dialog box</i> , page 169.
Edit	Opens the Edit Memory Access dialog box, where you can edit the selected memory area. See <i>Edit Memory Access dialog box</i> , page 169.
Delete	Deletes the selected memory area definition.
Delete All	Deletes all defined memory area definitions.

Table 17: Function buttons in the Memory Access Setup dialog box

Note: Except for the OK and Cancel buttons, buttons are only available when the option **Use manual ranges** is selected.

EDIT MEMORY ACCESS DIALOG BOX

In the **Edit Memory Access** dialog box—available from the **Memory Access Setup** dialog box—you can specify the memory ranges, and assign an access type to each memory range, for which you want to detect illegal accesses during the simulation.

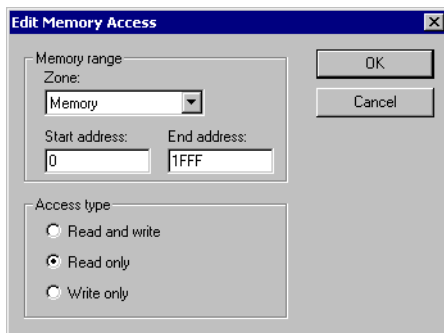


Figure 60: Edit Memory Access dialog box

For each memory range you can define the following properties:

Memory range

Use these settings to define the memory area for which you want to check the memory accesses:

Zone	The memory zone; see <i>Memory addressing</i> , page 137.
Start address	The start address for the address range, in hexadecimal notation.
End address	The end address for the address range, in hexadecimal notation.

Access type

Use one of these options to assign an access type to the memory range; the access type can be one of **Read and write**, **Read only**, or **Write only**. It is not possible to assign two different access types to the same memory area.

Cycle costs

Use the **Read** and **Write** text fields to specify the number of cycles used for accessing the memory range. The cycle cost can be specified individually for read and write accesses, because it can differ.

Cycle costs

Use these settings to specify the cost—in cycles—associated with accessing a memory entity during execution:

Bus width	The size of the memory entity depends on the bus width, which can be specified as 8, 16, or 32 bits. For examples about how this affects the cost, see Table 18, <i>Example of costs for accessing memory entities</i> .
Sequential	The cost for sequential accesses to the memory area; the cycle cost can be specified individually for read and write accesses, because it can differ.
Non-sequential	The cost for non-sequential accesses to the memory area; the cycle cost can be specified individually for read and write accesses, because it can differ.

Note: These options may, or may not, be available in your product version.

Example

If the cost is specified as 1 cycle, a word access (16 bits) will cost 2 cycles with an 8-bit bus width, and 1 cycle with a 16-bit or 32-bit bus width:

Memory entity	8-bit bus	16-bit bus	32-bit bus
Word entities (16 bits)	2	1	1
Long entities (32 bits)	4	2	1

Table 18: Example of costs for accessing memory entities

Using breakpoints in the simulator

Using the C-SPY Simulator, you can set an unlimited amount of breakpoints. For code and data breakpoints you can define a size attribute, that is, you can set the breakpoint on a range. You can also set immediate breakpoints.

For information about the breakpoint system, see the chapter *Using breakpoints* in this guide. For detailed information about code breakpoints, see *Code breakpoints dialog box*, page 210.

DATA BREAKPOINTS

Data breakpoints are triggered when data is accessed at the specified location. Data breakpoints are primarily useful for variables that have a fixed address in memory. If you set a breakpoint on an accessible local variable, the breakpoint will be set on the corresponding memory location. The validity of this location is only guaranteed for

small parts of the code. The execution will usually stop directly after the instruction that accessed the data has been executed.

You can set a data breakpoint in three different ways; by using:

- A dialog box, see *Data breakpoints dialog box*, page 171
- A system macro, see `__setDataBreak`, page 378
- The Memory window, see *Setting a breakpoint in the Memory window*, page 131.

Data breakpoints dialog box

The options for setting data breakpoints are available from the context menu that appears when you right-click in the Breakpoints window. On the context menu, choose **New Breakpoint>Data** to set a new breakpoint. Alternatively, to modify an existing breakpoint, select a breakpoint in the Breakpoint window and choose **Edit** on the context menu.

The **Data** breakpoints dialog box appears.

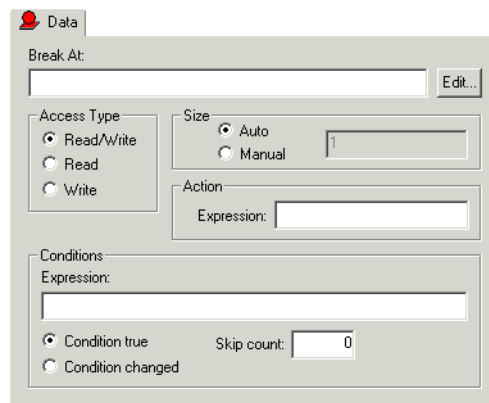


Figure 61: Data breakpoints dialog box

Break At

Specify the location for the breakpoint in the **Break At** text box. Alternatively, click the **Edit** browse button to open the **Enter Location** dialog box; see *Enter Location dialog box*, page 214.

Access Type

Use the options in the **Access Type** area to specify the type of memory access that triggers data or immediate breakpoints.

Memory Access type	Description
Read/Write	Read or write from location.
Read	Read from location.
Write	Write to location.

Table 19: Memory Access types

Note: Data breakpoints never stop execution within a single instruction. They are recorded and reported after the instruction is executed. (Immediate breakpoints do not stop execution at all, they only suspend it temporarily. See *Immediate breakpoints*, page 173.)

Size

Optionally, you can specify a size—in practice, a *range* of locations. Each read and write access to the specified memory range will trigger the breakpoint. For data breakpoints, this can be useful if you want the breakpoint to be triggered on accesses to data structures, such as arrays, structs, and unions.

There are two different ways the size can be specified:

- **Auto**, the size will automatically be based on the type of expression the breakpoint is set on. For example, if you set the breakpoint on a 12-byte structure, the size of the breakpoint will be 12 bytes
- **Manual**, you specify the size of the breakpoint manually in the **Size** text box.

Action

You can optionally connect an action to a breakpoint. You specify an expression, for instance a C-SPY macro function, which is evaluated when the breakpoint is triggered and the condition is true.

Conditions

You can specify simple and complex conditions.

Conditions	Description
Expression	A valid expression conforming to the C-SPY expression syntax.
Condition true	The breakpoint is triggered if the value of the expression is true.

Table 20: Breakpoint conditions

Conditions	Description
Condition changed	The breakpoint is triggered if the value of the expression has changed since it was last evaluated.
Skip count	The number of times that the breakpoint must be fulfilled before a break occurs (integer).

Table 20: Breakpoint conditions (Continued)

IMMEDIATE BREAKPOINTS

In addition to generic breakpoints, the C-SPY Simulator lets you set *immediate* breakpoints, which will halt instruction execution only temporarily. This allows a C-SPY macro function to be called when the processor is about to read data from a location or immediately after it has written data. Instruction execution will resume after the action.

This type of breakpoint is useful for simulating memory-mapped devices of various kinds (for instance serial ports and timers). When the processor reads at a memory-mapped location, a C-SPY macro function can intervene and supply appropriate data. Conversely, when the processor writes to a memory-mapped location, a C-SPY macro function can act on the value that was written.

The two different methods of setting an immediate breakpoint are by using:

- A dialog box, see *Immediate breakpoints dialog box*, page 173
- A system macro, see `__setSimBreak`, page 379.

Immediate breakpoints dialog box

The options for setting immediate breakpoints are available from the context menu that appears when you right-click in the Breakpoints window. On the context menu, choose **New Breakpoint>Immediate** to set a new breakpoint. Alternatively, to modify an existing breakpoint, select a breakpoint in the Breakpoint window and choose **Edit** on the context menu.

The **Immediate** breakpoints dialog box appears.

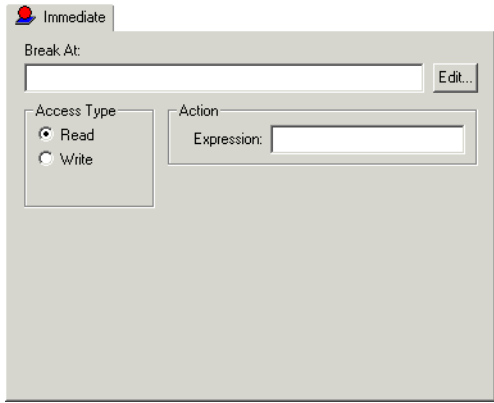


Figure 62: Immediate breakpoints page

Break At

Specify the location for the breakpoint in the **Break At** text box. Alternatively, click the **Edit** browse button to open the **Enter Location** dialog box; see *Enter Location dialog box*, page 214.

Access Type

Use the options in the **Access Type** area to specify the type of memory access that triggers data or immediate breakpoints.

Memory Access type	Description
Read	Read from location.
Write	Write to location.

Table 21: Memory Access types

Note: Immediate breakpoints do not stop execution at all; they only suspend it temporarily. See *Using breakpoints in the simulator*, page 170.

Action

You should connect an action to the breakpoint. Specify an expression, for instance a C-SPY macro function, which is evaluated when the breakpoint is triggered and the condition is true.

BREAKPOINT USAGE DIALOG BOX

The **Breakpoint Usage** dialog box—available from the **Simulator** menu—lists all active breakpoints.

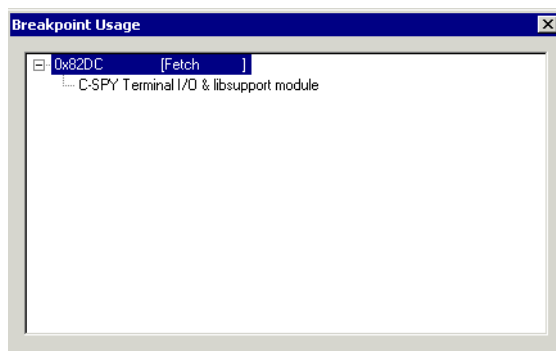


Figure 63: Breakpoint Usage dialog box

In addition to listing all breakpoints that you have defined, this dialog box also lists the internal breakpoints that the debugger is using.

For each breakpoint in the list the address and access type are shown. Each breakpoint in the list can also be expanded to show its originator.

For more information, see *Viewing all breakpoints*, page 133.

Simulating interrupts

By being able to simulate interrupts, you can debug the program logic long before any hardware is available. This chapter contains detailed information about the C-SPY® interrupt simulation system and how to configure the simulated interrupts to make them reflect the interrupts of your target hardware. Finally, reference information about each interrupt system macro is provided.

For information about the interrupt-specific facilities useful when writing interrupt service routines, see the *IAR C/C++ Compiler Reference Guide*.

The C-SPY interrupt simulation system

The IAR C-SPY Simulator includes an interrupt simulation system that allows you to simulate the execution of interrupts during debugging. It is possible to configure the interrupt simulation system so that it resembles your hardware interrupt system. By using simulated interrupts in conjunction with C-SPY macros and breakpoints, you can compose a complex simulation of, for instance, interrupt-driven peripheral devices. Having simulated interrupts also lets you test the logic of your interrupt service routines.


The interrupt system has the following features:

- Simulated interrupt support for the microcontroller
- Single-occasion or periodical interrupts based on the cycle counter
- Predefined interrupts for different devices
- Configuration of hold time, probability, and timing variation
- State information for locating timing problems
- Two interfaces for configuring the simulated interrupts—a dialog box and a C-SPY system macro—that is, one interactive and one automating interface
- Activation of interrupts either instantly or based on parameters you define
- A log window which continuously displays the status for each defined interrupt.

The interrupt system is activated by default, but if it is not required it can be turned off to speed up the simulation. You can turn the interrupt system on or off as required either in the **Interrupt Setup** dialog box, or by using a system macro. Defined interrupts will be preserved until you remove them. All interrupts you define using the **Interrupt Setup** dialog box are preserved between debug sessions.

INTERRUPT CHARACTERISTICS

The simulated interrupts consist of a set of characteristics which lets you fine-tune each interrupt to make it resemble the real interrupt on your target hardware. You can specify a *first activation time*, a *repeat interval*, a *hold time*, and a *variance*.

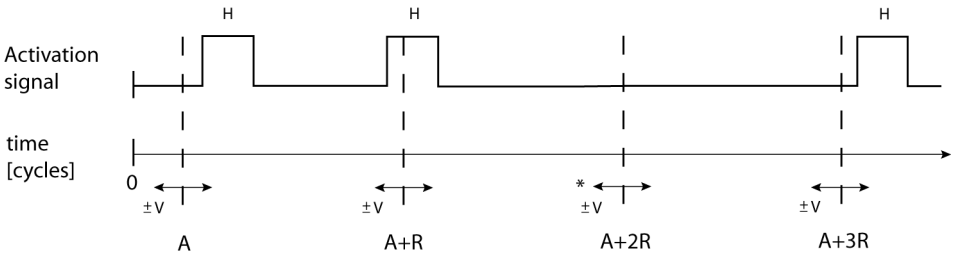

* If probability is less than 100%, some interrupts may be omitted.

A = Activation time
R = Repeat interval
H = Hold time
V = Variance

Figure 64: Simulated interrupt configuration

The interrupt simulation system uses the cycle counter as a clock to determine when an interrupt should be raised in the simulator. You specify the *first activation time*, which is based on the cycle counter. C-SPY will generate an interrupt when the cycle counter has passed the specified activation time. However, interrupts can only be raised between instructions, which means that a full assembler instruction must have been executed before the interrupt is generated, regardless of how many cycles an instruction takes.

To define the periodicity of the interrupt generation you can specify the *repeat interval* which defines the amount of cycles after which a new interrupt should be generated. In addition to the repeat interval, the periodicity depends on the two options *probability*—the probability, in percent, that the interrupt will actually appear in a period—and *variance*—a time variation range as a percentage of the repeat interval. These options make it possible to randomize the interrupt simulation. You can also specify a *hold time* which describes how long the interrupt remains pending until removed if it has not been processed. If the hold time is set to *infinite*, the corresponding pending bit will be set until the interrupt is acknowledged or removed.

INTERRUPT SIMULATION STATES

The interrupt simulation system contains status information that can be used for locating timing problems in your application. The **Interrupt Setup** dialog box displays the available status information. The interrupt activation signal can exist in one of the states *Idle* or *Pending*. For an interrupt, the following states can be displayed: *Executing*, *Removed*, or *Expired*.

For a repeatable interrupt that has a specified repeat time which is longer than the execution time, the status information at different times can look like this:

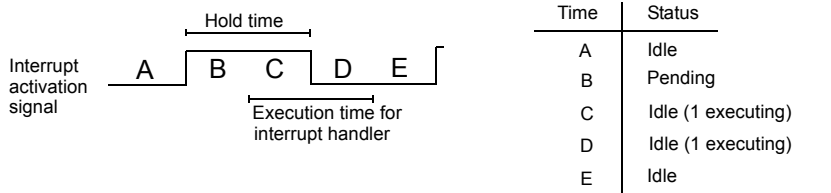


Figure 65: Simulation states - example 1

If the interrupt repeat interval is shorter than the execution time, and the interrupt is re-entrant (or non-maskable), the status information at different times can look like this:

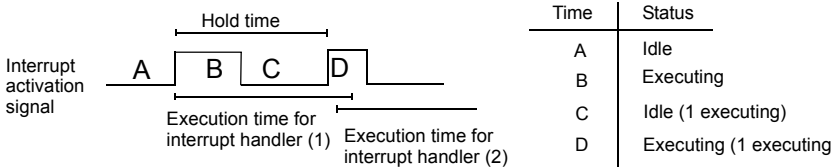


Figure 66: Simulation states - example 2

In this case, the execution time of the interrupt handler is too long compared to the repeat time, which might indicate that you should rewrite your interrupt handler and make it shorter, or that you should specify a longer repeat time for the interrupt simulation system.

Using the interrupt simulation system

The interrupt simulation system is easy to use. However, to take full advantage of the interrupt simulation system you should be familiar with how to adapt it for the processor you are using, and know how to use:

- The Forced Interrupt window
- The **Interrupts** and **Interrupt Setup** dialog boxes

- The C-SPY system macros for interrupts
- The Interrupt Log window.

TARGET-ADAPTING THE INTERRUPT SIMULATION SYSTEM

The interrupt simulation has the same behavior as the hardware. This means that the execution of an interrupt is dependent on the status of the global interrupt enable bit. The execution of maskable interrupts is also dependent on the status of the individual interrupt enable bits.

To be able to perform these actions for various derivatives, the interrupt system must have detailed information about each available interrupt. Except for default settings, this information is provided in the device description files. You can find preconfigured `.ddf` files in the `cpuname\config` directory. The default settings will be used if no device description file has been specified.

- 1 To load a device description file before you start C-SPY, choose **Project>Options** and click the **Setup** tab of the **Debugger** category.
- 2 Choose a device description file that suits your target.

Note: In case you do not find a preconfigured device description file that resembles your device, you can define one according to your needs. For details of device description files, see *Selecting a device description file*, page 110.

INTERRUPT SETUP DIALOG BOX

The **Interrupt Setup** dialog box—available by choosing **Simulator>Interrupt Setup**—lists all defined interrupts.

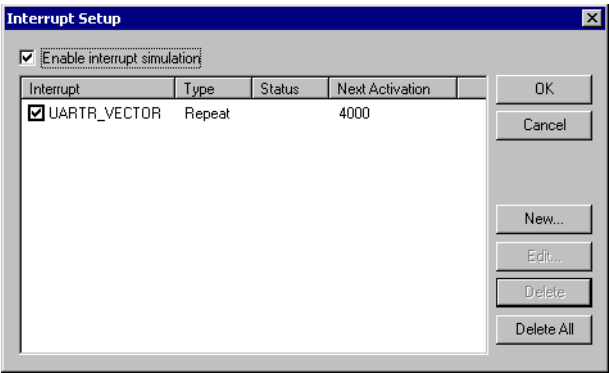


Figure 67: Interrupt Setup dialog box

The option **Enable interrupt simulation** enables or disables interrupt simulation. If the interrupt simulation is disabled, the definitions remain but no interrupts will be generated. You can also enable and disable installed interrupts individually by using the check box to the left of the interrupt name in the list of installed interrupts.

The columns contain the following information:

Interrupt	Lists all interrupts.
Type	Shows the type of the interrupt. The type can be Forced , Single , or Repeat .
Status	Shows the status of the interrupt. The status can be Idle , Removed , Pending , Executing , or Expired .
Next Activation	Shows the next activation time in cycles.

Note: For repeatable interrupts there might be additional information in the **Type** column about how many interrupts of the same type that is simultaneously executing (*n* *executing*). If *n* is larger than one, there is a reentrant interrupt in your interrupt simulation system that never finishes executing, which might indicate that there is a problem in your application.

Only non-forced interrupts may be edited or removed.

Click **New** or **Edit** to open the **Edit Interrupt** dialog box.

EDIT INTERRUPT DIALOG BOX

Use the **Edit Interrupt** dialog box—available from the **Interrupt Setup** dialog box—to add and modify interrupts. This dialog box provides you with a graphical interface

where you can interactively fine-tune the interrupt simulation parameters. You can add the parameters and quickly test that the interrupt is generated according to your needs.

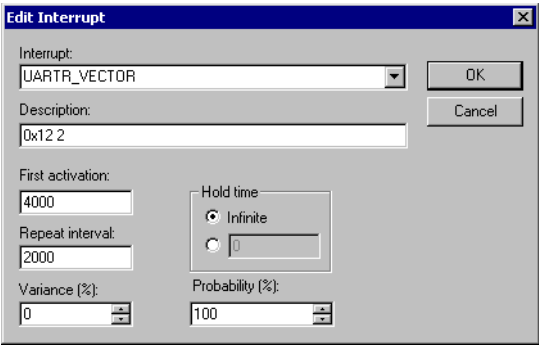


Figure 68: Edit Interrupt dialog box

For each interrupt you can set the following options:

Interrupt	A drop-down list containing all available interrupts. Your selection will automatically update the Description box. The list is populated with entries from the device description file that you have selected.
Description	Contains the description of the selected interrupt, if available. The description is retrieved from the selected device description file. For interrupts specified using the system macro <code>__orderInterrupt</code> , the Description box will be empty.
First activation	The value of the cycle counter after which the specified type of interrupt will be generated.
Repeat interval	The periodicity of the interrupt in cycles.
Variance %	A timing variation range, as a percentage of the repeat interval, in which the interrupt may occur for a period. For example, if the repeat interval is 100 and the variance 5%, the interrupt might occur anywhere between $T=95$ and $T=105$, to simulate a variation in the timing.
Hold time	Describes how long, in cycles, the interrupt remains pending until removed if it has not been processed. If you select Infinite , the corresponding pending bit will be set until the interrupt is acknowledged or removed.

Probability % The probability, in percent, that the interrupt will actually occur within the specified period.

FORCED INTERRUPT WINDOW

From the **Forced Interrupt** window—available from the **Simulator** menu—you can force an interrupt instantly. This is useful when you want to check your interrupt logistics and interrupt routines.

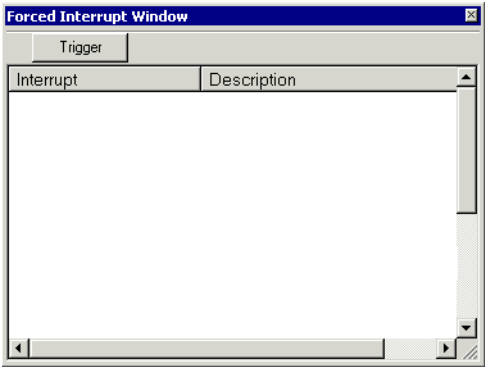


Figure 69: Forced Interrupt window

To force an interrupt, the interrupt simulation system must be enabled. To enable the interrupt simulation system, see *Interrupt Setup dialog box*, page 180.

The Forced Interrupt window lists all available interrupts and their definitions. The description field is editable and the information is retrieved from the selected device description file.

By selecting an interrupt and clicking the **Trigger** button, an interrupt of the selected type is generated.

A triggered interrupt will have the following characteristics:

Characteristics	Settings
First Activation	As soon as possible (0)
Repeat interval	0
Hold time	Infinite
Variance	0%
Probability	100%

Table 22: Characteristics of a forced interrupt

C-SPY SYSTEM MACROS FOR INTERRUPTS

Macros are useful when you already have sorted out the details of the simulated interrupt so that it fully meets your requirements. By writing a macro function containing definitions for the simulated interrupts you can automatically execute the functions when C-SPY starts. Another advantage is that your simulated interrupt definitions will be documented if you use macro files, and if you are several engineers involved in the development project you can share the macro files within the group.

The C-SPY Simulator provides a set of predefined system macros for the interrupt simulation system. The advantage of using the system macros for specifying the simulated interrupts is that it lets you automate the procedure.

These are the available system macros related to interrupts:

```
__enableInterrupts
__disableInterrupts
__orderInterrupt
__cancelInterrupt
__cancelAllInterrupts
__popSimulatorInterruptExecutingStack
```

The parameters of the first five macros correspond to the equivalent entries of the **Interrupts** dialog box. To read more about how to use the

`__popSimulatorInterruptExecutingStack` macro, see *Interrupt simulation in a multi-task system*, page 184.

For detailed reference information about each macro, see *Description of C-SPY system macros*, page 368.

Defining simulated interrupts at C-SPY startup using a setup file

If you want to use a setup file to define simulated interrupts at C-SPY startup, follow the procedure described in *Registering and executing using setup macros and setup files*, page 147.

Interrupt simulation in a multi-task system

If you are using interrupts in such a way that the normal instruction used for returning from an interrupt handler is not used, for example in an operating system with task-switching, the simulator cannot automatically detect that the interrupt has finished executing. The interrupt simulation system will work correctly, but the status information in the **Interrupt Setup** dialog box might not look as you expect. If there are too many interrupts executing simultaneously, a warning might be issued.


To avoid these problems, you can use the `__popSimulatorInterruptExecutingStack` macro to inform the interrupt simulation system that the interrupt handler has finished executing, as if the normal instruction used for returning from an interrupt handler was executed. You can use the following procedure:

- 1 Set a code breakpoint on the instruction that returns from the interrupt function.
- 2 Specify the `__popSimulatorInterruptExecutingStack` macro as a condition to the breakpoint.

When the breakpoint is triggered, the macro is executed and then the application continues to execute automatically.

INTERRUPT LOG WINDOW

The **Interrupt Log** window—available from the **Simulator** menu—displays runtime information about the interrupts that you have activated in the **Interrupts** dialog box or forced via the **Forced Interrupt** window. The information is useful for debugging the interrupt handling in the target system.

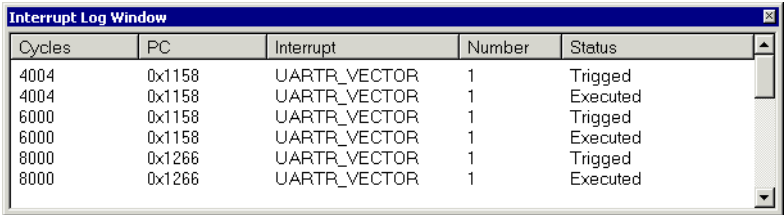

Cycles	PC	Interrupt	Number	Status
4004	0x1158	UARTR_VECTOR	1	Triggered
4004	0x1158	UARTR_VECTOR	1	Executed
6000	0x1158	UARTR_VECTOR	1	Triggered
6000	0x1158	UARTR_VECTOR	1	Executed
8000	0x1266	UARTR_VECTOR	1	Triggered
8000	0x1266	UARTR_VECTOR	1	Executed

Figure 70: Interrupt Log window

The columns contain the following information:

Column	Description
Cycles	The point in time, measured in cycles, when the event occurred.
PC	The value of the program counter when the event occurred.
Interrupt	The interrupt as defined in the device description file.
Number	A unique number assigned to the interrupt. The number is used for distinguishing between different interrupts of the same type.

Table 23: Description of the Interrupt Log window

Column	Description
Status	<p>Shows the status of the interrupt, which can be Triggered, Forced, Executing, Finished, or Expired.</p> <ul style="list-style-type: none">• Triggered: The interrupt has passed its activation time.• Forced: The same as Triggered, but the interrupt has been forced from the Forced Interrupt window.• Executing: The interrupt is currently executing.• Finished: The interrupt has been executed.• Expired: The interrupt hold time has expired without the interrupt being executed.

Table 23: Description of the Interrupt Log window (Continued)

When the Interrupt Log window is open it will be updated continuously during runtime.

Note: If the window becomes full of entries, the first entries will be erased.

Simulating a simple interrupt

This example demonstrates the method for simulating a timer interrupt. However, the procedure can also be used for other types of interrupts.

This simple application contains an interrupt service routine for a timer, which increments a tick variable. The main function sets the necessary status registers. The application exits when 100 interrupts have been generated.

```
#include "iocpuname.h"
#include <intrinsics.h>

volatile int ticks = 0;
void main (void)
{
    /* Enter your timer setup code here */

    __enable_interrupt();          /* Enable interrupts */

    while (ticks < 100);          /* Endless loop */
    printf("Done\n");
}

/* Timer interrupt service routine */
#pragma vector = TIMER_VECTOR
__interrupt void basic_timer(void)
{
    ticks += 1;
}
```


To simulate and debug an interrupt, perform the following steps:

- 1 Add your interrupt service routine to your application source code and add the file to your project.
- 2 C-SPY needs information about the interrupt to be able to simulate it. This information is provided in the device description files. To select a device description file, choose **Project>Options**, and click the **Setup** tab in the **Debugger** category. Use the **Use device description file** browse button to locate the file `ddf` file.
- 3 Build your project and start the simulator.
- 4 Choose **Simulator>Interrupt Setup** to open the **Interrupts Setup** dialog box. Select the **Enable interrupt simulation** option to enable interrupt simulation. Click **New** to open the **Edit Interrupt** dialog box. The following table lists the options and suggests some settings. For your interrupt, verify the options according to your requirements:

Option	Settings
Interrupt	TIMER_VECTOR
First Activation	4000
Repeat interval	2000
Hold time	0
Probability %	100
Variance %	0

Table 24: Timer interrupt settings


Click **OK**.

- 5 Execute your application. If you have enabled the interrupt properly in your application source code, C-SPY will:
 - Generate an interrupt when the cycle counter has passed 4000
 - Continuously repeat the interrupt after approximately 2000 cycles.

Part 6. Reference information

This part of the IAR Embedded Workbench® IDE User Guide contains the following chapters:

- IAR Embedded Workbench® IDE reference
- C-SPY® Debugger reference
- General options
- Compiler options
- Assembler options
- Custom build options
- Build actions options
- Linker options
- Library builder options
- Debugger options
- The IAR C-SPY Command Line Utility—cspybat
- C-SPY® macros reference.





IAR Embedded Workbench® IDE reference

This chapter contains reference information about the windows, menus, menu commands, and the corresponding components that are found in the IAR Embedded Workbench IDE. Information about how to best use the IDE for your purposes can be found in parts 3 to 5 in this guide. This chapter contains the following sections:

- *Windows*, page 191
- *Menus*, page 218.

The IAR Embedded Workbench IDE is a modular application. Which menus are available depends on which components are installed.

Windows

The available windows are:

- IAR Embedded Workbench IDE window
- Workspace window
- Editor window
- Source Browser window
- Breakpoints window
- Message windows.

In addition, a set of C-SPY®-specific windows becomes available when you start the IAR C-SPY Debugger. Reference information about these windows can be found in the chapter *C-SPY® Debugger reference* in this guide.

IAR EMBEDDED WORKBENCH IDE WINDOW

The figure shows the main window of the IAR Embedded Workbench IDE and its different components. The window might look different depending on which plugin modules you are using.

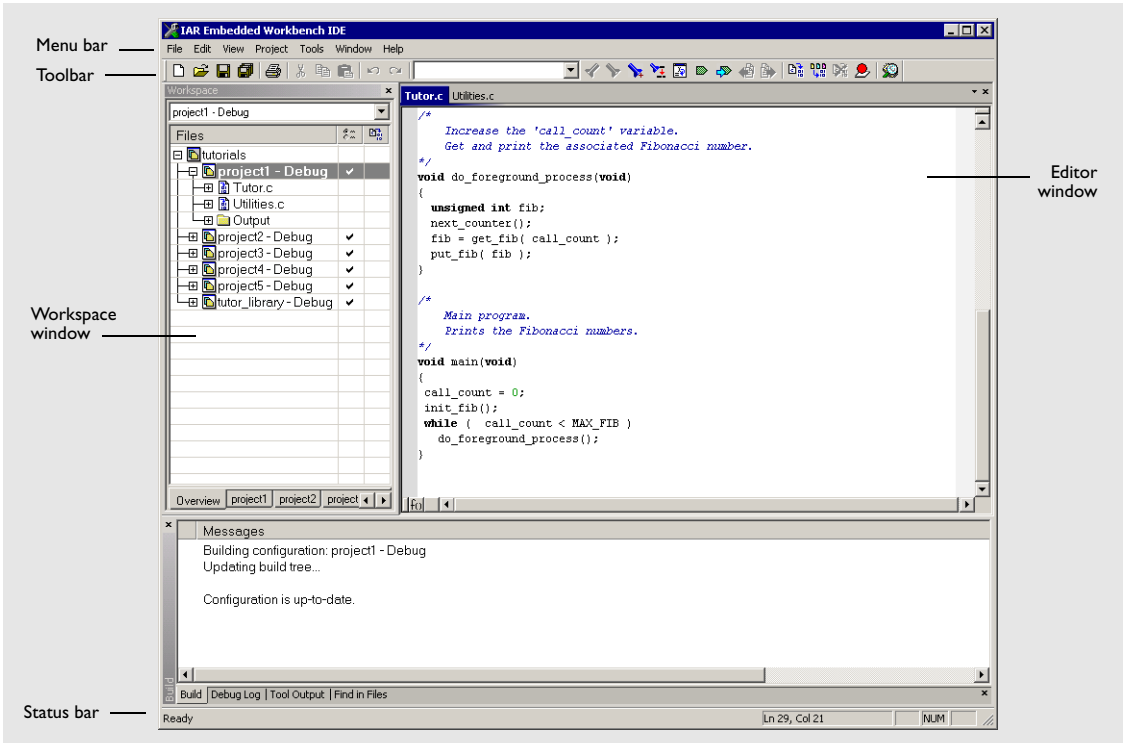


Figure 71: IAR Embedded Workbench IDE window

Each window item is explained in greater detail in the following sections.

Menu bar

Gives access to the IAR Embedded Workbench IDE menus.

Menu	Description
File	The File menu provides commands for opening source and project files, saving and printing, and exiting from the IAR Embedded Workbench IDE.
Edit	The Edit menu provides commands for editing and searching in editor windows and for enabling and disabling breakpoints in C-SPY.

Table 25: IAR Embedded Workbench IDE menu bar

Menu	Description
View	Use the commands on the View menu to open windows and decide which toolbars to display.
Project	The Project menu provides commands for adding files to a project, creating groups, and running the IAR Systems tools on the current project.
Tools	The Tools menu is a user-configurable menu to which you can add tools for use with the IAR Embedded Workbench IDE.
Window	With the commands on the Window menu you can manipulate the IAR Embedded Workbench IDE windows and change their arrangement on the screen.
Help	The commands on the Help menu provide help about the IAR Embedded Workbench IDE.

Table 25: IAR Embedded Workbench IDE menu bar (Continued)

For reference information for each menu, see *Menus*, page 218.

Toolbar

The IAR Embedded Workbench IDE toolbar—available from the **View** menu—provides buttons for the most useful commands on the IAR Embedded Workbench IDE menus, and a text box for typing a string to do a quick search.

You can display a description of any button by pointing to it with the mouse button. When a command is not available, the corresponding toolbar button will be dimmed, and you will not be able to click it.

This figure shows the menu commands corresponding to each of the toolbar buttons:

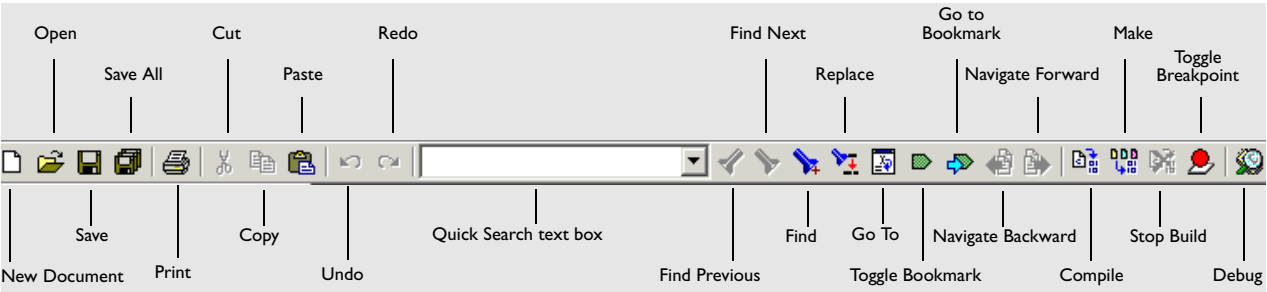


Figure 72: IAR Embedded Workbench IDE toolbar



Note: When you start C-SPY, the **Debug** button will change to a **Make and Debug** button.

Status bar

The Status bar at the bottom of the window displays the number of errors and warnings generated during a build, the position of the insertion point in the editor window, and the state of the modifier keys. The Status bar is available from the **View** menu.

As you are editing, the status bar shows the current line and column number containing the insertion point, and the Caps Lock, Num Lock, and Overwrite status.

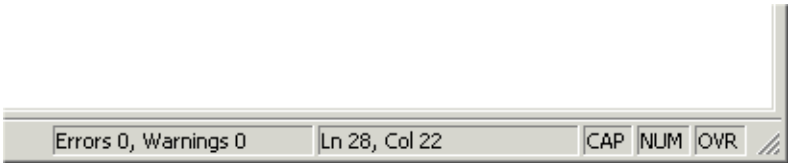


Figure 73: IAR Embedded Workbench IDE window status bar

WORKSPACE WINDOW

The Workspace window, available from the **View** menu, is where you can access your projects and files during the application development.

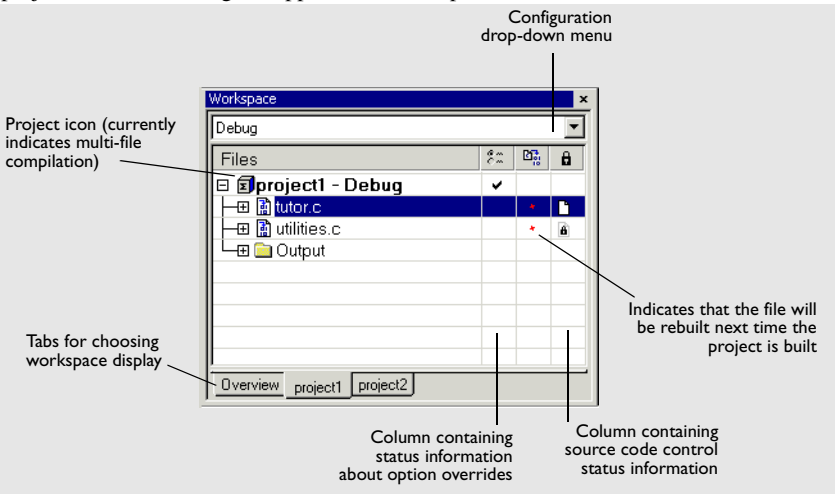


Figure 74: Workspace window

Toolbar

At the top of the window there is a drop-down list where you can choose a build configuration to display in the window for a specific project.

The display area

The display area is divided in different columns.

The **Files** column displays the name of the current workspace and a tree representation of the projects, groups and files included in the workspace.



The column that contains status information about option overrides can have one of three icons for each level in the project:

Blank	There are no settings/overrides for this file/group
Black check mark	There are local settings/overrides for this file/group
Red check mark	There are local settings/overrides for this file/group, but they are either identical with the inherited settings or they will be ignored because of use of multi-file compilation, which means the overrides are superfluous.



The column that contains build status information can have one of three icons for each file in the project:

Blank	The file will not be rebuilt next time the project is built
Red star	The file will be rebuilt next time the project is built
Gearwheel	The file is being rebuilt.



For details about the different source code control icons, see *Source code control states*, page 198.

At the bottom of the window you can choose which project to display. Alternatively, you can choose to display an overview of the entire workspace.

For more information about project management and using the Workspace window, see the chapter *Managing projects* in *Part 3. Project management and building* in this guide.

Workspace window context menu

Clicking the right mouse button in the Workspace window displays a context menu which gives you convenient access to several commands.




Figure 75: Workspace window context menu

The following commands are available on the context menu:

Menu command	Description
Options	Displays a dialog box where you can set options for each build tool on the selected item in the Workspace window. You can set options on the entire project, on a group of files, or on an individual file.
Make	Brings the current target up to date by compiling, assembling, and linking only the files that have changed since the last build.
Compile	Compiles or assembles the currently active file as appropriate. You can choose the file either by selecting it in the Workspace window, or by selecting the editor window containing the file you want to compile.
Rebuild All	Recompiles and relinks all files in the selected build configuration.
Clean	Deletes intermediate files.
Stop Build	Stops the current build operation.
Add>Add Files	Opens a dialog box where you can add files to the project.
Add>Add "filename"	Adds the indicated file to the project. This command is only available if there is an open file in the editor.
Add>Add Group	Opens a dialog box where you can add new groups to the project.
Remove	Removes selected items from the Workspace window.
Source Code Control	Opens a submenu with commands for source code control, see <i>Source Code Control menu</i> , page 197.

Table 26: Workspace window context menu commands

Menu command	Description
File Properties	Opens a standard File Properties dialog box for the selected file.
Set as Active	Sets the selected project in the overview display to be the active project. It is the active project that will be built when the Make command is executed.

Table 26: Workspace window context menu commands (Continued)

Source Code Control menu

The **Source Code Control** menu is available from the **Project** menu and from the context menu in the Workspace window. This menu contains some of the most commonly used commands of external, third-party source code control systems.




Figure 76: Source Code Control menu

For more information about interacting with an external source code control system, see *Source code control*, page 82.

The following commands are available on the submenu:

Menu command	Description
Check In	Opens the Check In Files dialog box where you can check in the selected files; see <i>Check In Files dialog box</i> , page 200. Any changes you have made in the files will be stored in the archive. This command is enabled when currently checked-out files are selected in the Workspace window.
Check Out	Checks out the selected file or files. Depending on the SCC system you are using, a dialog box may appear; see <i>Check Out Files dialog box</i> , page 201. This means you get a local copy of the file(s), which you can edit. This command is enabled when currently checked-in files are selected in the Workspace window.

Table 27: Description of source code control commands

Menu command	Description
Undo Check out	The selected files revert to the latest archived version; the files are no longer checked-out. Any changes you have made to the files will be lost. This command is enabled when currently checked-out files are selected in the Workspace window.
Get Latest Version	Replaces the selected files with the latest archived version.
Compare	Displays—in a SCC-specific window—the differences between the local version and the most recent archived version.
History	Displays SCC-specific information about the revision history of the selected file.
Properties	Displays information available in the SCC system for the selected file.
Refresh	Updates the SCC display status for all the files that are part of the project. This command is always enabled for all projects under SCC.
Connect Project to SCC Project	Opens a dialog box, which originates from the SCC client application, to let you create a connection between the selected IAR Embedded Workbench project and an SCC project; the IAR Embedded Workbench project will then be an SCC-controlled project. After creating this connection, a special column that contains status information will appear in the Workspace window.
Disconnect Project From SCC Project	Removes the connection between the selected IAR Embedded Workbench project and an SCC project; your project will no longer be a SCC-controlled project. The column in the Workspace window that contains SCC status information will no longer be visible for that project.

Table 27: Description of source code control commands (Continued)

Source code control states

Each source code-controlled file can be in one of several states.





SCC state	Description
	Checked out to you. The file is editable.
	Checked out to you. The file is editable and you have modified the file.
 (grey padlock)	Checked in. In many SCC systems this means that the file is write-protected.
 (grey padlock)	Checked in. There is a new version available in the archive.

Table 28: Description of source code control states



SCC state	Description
 (red padlock)	Checked out exclusively to another user. In many SCC systems this means that you cannot check out the file.
 (red padlock)	Checked out exclusively to another user. There is a new version available in the archive. In many SCC systems this means that you cannot check out the file.

Table 28: Description of source code control states (Continued)

Note: The source code control in IAR Embedded Workbench depends on the information provided by the SCC system. If the SCC system provides incorrect or incomplete information about the states, IAR Embedded Workbench might display incorrect symbols.

Select Source Code Control Provider dialog box

The **Select Source Code Control Provider** dialog box is displayed if there are several SCC systems from different vendors available. Use this dialog box to choose the SCC system you want to use.

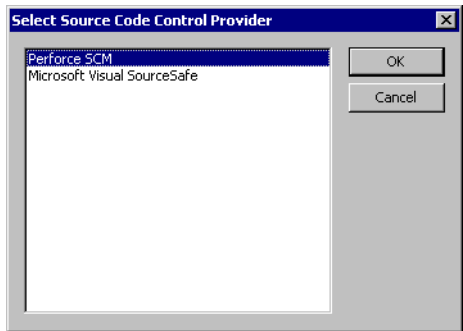


Figure 77: Select Source Code Control Provider dialog box

Check In Files dialog box

The **Check In Files** dialog box is available by choosing the **Project>Source Code Control>Check In** command, alternatively available from the Workspace window context menu.

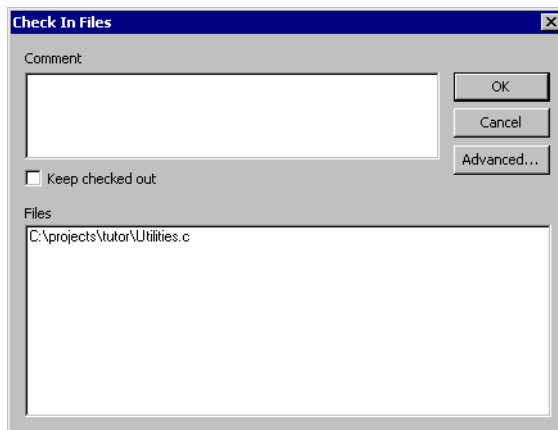


Figure 78: Check In Files dialog box

Comment

A text box in which you can write a comment—typically a description of your changes—that will be stored in the archive together with the file revision. This text box is only enabled if the SCC system supports the adding of comments at check-in.

Keep checked out

The file(s) will continue to be checked out after they have been checked in. Typically, this is useful if you want to make your modifications available to other members in your project team, without stopping your own work with the file.

Advanced

Opens a dialog box, originating from the SCC client application, that contains advanced options. This button is only available if the SCC system supports setting advanced options at check in.

Files

A list of the files that will be checked in. The list will contain all files that were selected in the Workspace window when this dialog box was opened.

Check Out Files dialog box

The **Check Out File** dialog box is available by choosing the **Project>Source Code Control>Check Out** command, alternatively available from the Workspace window context menu. However, this dialog box is only available if the SCC system supports adding comments at check-out or advanced options.

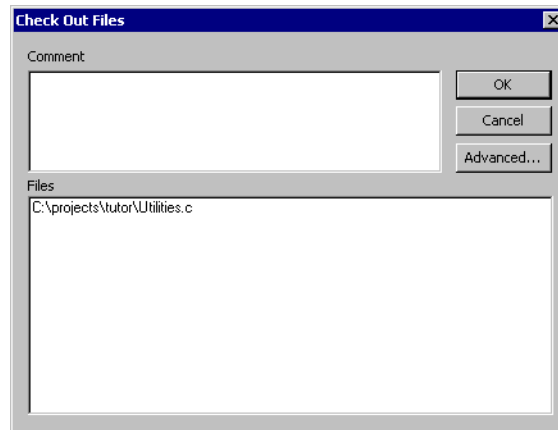


Figure 79: Check Out File dialog box

Comment

A text field in which you can write a comment—typically the reason why the file is checked out—that will be placed in the archive together with the file revision. This text box is only enabled if the SCC system supports the adding of comments at check-out.

Advanced

Opens a dialog box, originating from the SCC client application, that contains advanced options. This button is only available if the SCC system supports setting advanced options at check out.

Files

A list of files that will be checked out. The list will contain all files that were selected in the Workspace window when this dialog box was opened.

EDITOR WINDOW

Source files are displayed in editor windows. You can have one or several editor windows open at the same time. The editor window is always docked, and its size and position depends on other currently open windows.

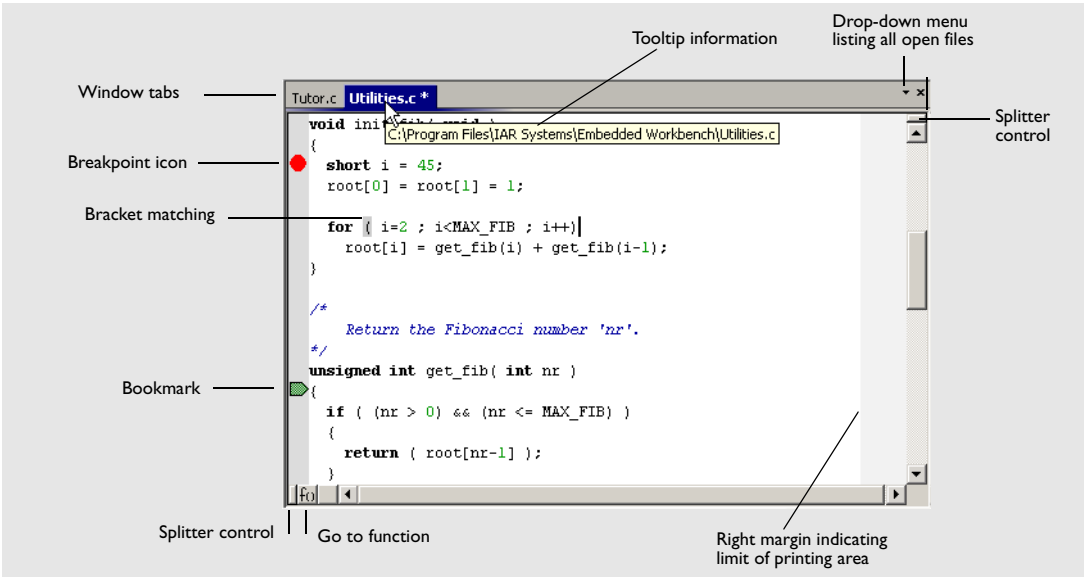


Figure 80: Editor window

The name of the open source file is displayed on the tab. If a file is read-only, a padlock icon is visible at the bottom left corner of the editor window. If a file has been modified after it was last saved, an asterisk appears after the filename on the tab, for example `Utilities.c *`. All open files are available from the drop-down menu in the upper right corner of the editor window.

For information about using the editor, see the chapter *Editing*, page 93.

Split commands

Use the **Window>Split** command—or the Splitter controls—to split the editor window horizontally or vertically into multiple panes.

On the **Window** menu you also find commands for opening multiple editor windows, as well as commands for moving files between the different editor windows.

Go to function



With the **Go to function** button in the bottom left-hand corner of the editor window you can display all functions in the C or C++ editor window. You can then choose to go directly to one of them.

Editor window tab context menu

The context menu that appears if you right-click on a tab in the editor window provides access to commands for saving and closing the file.




Figure 81: Editor window tab context menu

Editor window context menu

The context menu available in the editor window provides convenient access to several commands.

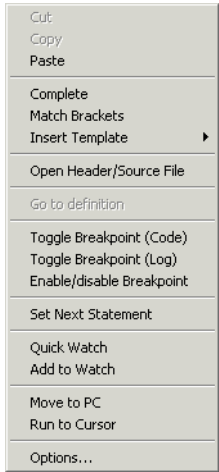


Figure 82: Editor window context menu

Note: The contents of this menu are dynamic, which means it may contain other commands than in this figure. All available commands are described in Table 29, *Description of commands on the editor window context menu*.

The following commands are available on the editor window context menu:

Menu command	Description
Cut, Copy, Paste	Standard window commands.
Complete	Attempts to complete the word you have begun to type, basing the guess on the contents of the rest of the editor document.
Match Brackets	Selects all text between the brackets immediately surrounding the insertion point, increases the selection to the next hierarchic pair of brackets, or beeps if there is no higher bracket hierarchy.
Insert Template	Displays a list in the editor window from which you can choose a code template to be inserted at the location of the insertion point. If the code template you choose requires any field input, the Template dialog box appears; for information about this dialog box, see <i>Template dialog box</i> , page 228. For information about using code templates, see <i>Using and adding code templates</i> , page 97.
Open "header.h"	Opens the header file "header.h" in an editor window. This menu command is only available if the insertion point is located on an <code>#include</code> line when you open the context menu.
Open Header/Source File	Jumps from the current file to the corresponding header or source file. If the destination file is not open when performing the command, the file will first be opened. This menu command is only available if the insertion point is located on any line except an <code>#include</code> line when you open the context menu. This command is also available from the File>Open menu.
Go to definition	Shows the declaration of the symbol where the insertion point is placed.
Check In	Commands for source code control; for more details, see <i>Source Code Control menu</i> , page 197. These menu commands are only available if the current source file in the editor window is SCC-controlled. The file must also be a member of the current project.
Check Out	
Undo Checkout	
Toggle Breakpoint (Code)	Toggles a code breakpoint at the statement or instruction containing or close to the cursor in the source window. For information about code breakpoints, see <i>Code breakpoints dialog box</i> , page 210.
Toggle Breakpoint (Log)	Toggles a log breakpoint at the statement or instruction containing or close to the cursor in the source window. For information about log breakpoints, see <i>Log breakpoints dialog box</i> , page 212.
Enable/disable Breakpoint	Toggles a breakpoint between being disabled, but not actually removed—making it available for future use—and being enabled again.

Table 29: Description of commands on the editor window context menu

Menu command	Description
Set Next Statement	Sets the PC directly to the selected statement or instruction without executing any code. Use this menu command with care. This menu command is only available when you are using the debugger.
Quick Watch	Opens the Quick Watch window, see <i>Quick Watch window</i> , page 285. This menu command is only available when you are using the debugger.
Add to Watch	Adds the selected symbol to the Watch window. This menu command is only available when you are using the debugger.
Move to PC	Moves the insertion point to the current PC position in the editor window. This menu command is only available when you are using the debugger.
Run to Cursor	Executes from the current statement or instruction up to a selected statement or instruction. This menu command is only available when you are using the debugger.
Options	Displays the IDE Options dialog box, see <i>Tools menu</i> , page 240.

Table 29: Description of commands on the editor window context menu (Continued)

Source file paths

The IAR Embedded Workbench IDE supports relative source file paths to a certain degree.

If a source file is located in the project file directory or in any subdirectory of the project file directory, the IAR Embedded Workbench IDE will use a path relative to the project file when accessing the source file.

Editor key summary

The following tables summarize the editor’s keyboard commands.

Use the following keys and key combinations for moving the insertion point:

To move the insertion point	Press
One character left	Arrow left
One character right	Arrow right
One word left	Ctrl+Arrow left
One word right	Ctrl+Arrow right
One line up	Arrow up
One line down	Arrow down
To the start of the line	Home

Table 30: Editor keyboard commands for insertion point navigation

To move the insertion point	Press
To the end of the line	End
To the first line in the file	Ctrl+Home
To the last line in the file	Ctrl+End

Table 30: Editor keyboard commands for insertion point navigation (Continued)

Use the following keys and key combinations for scrolling text:

To scroll	Press
Up one line	Ctrl+Arrow up
Down one line	Ctrl+Arrow down
Up one page	Page Up
Down one page	Page Down

Table 31: Editor keyboard commands for scrolling

Use the following key combinations for selecting text:

To select	Press
The character to the left	Shift+Arrow left
The character to the right	Shift+Arrow right
One word to the left	Shift+Ctrl+Arrow left
One word to the right	Shift+Ctrl+Arrow right
To the same position on the previous line	Shift+Arrow up
To the same position on the next line	Shift+Arrow down
To the start of the line	Shift+Home
To the end of the line	Shift+End
One screen up	Shift+Page Up
One screen down	Shift+Page Down
To the beginning of the file	Shift+Ctrl+Home
To the end of the file	Shift+Ctrl+End

Table 32: Editor keyboard commands for selecting text

SOURCE BROWSER WINDOW

The Source Browser window—available from the **View** menu—displays an hierarchical view in alphabetical order of all symbols defined in the active build configuration.

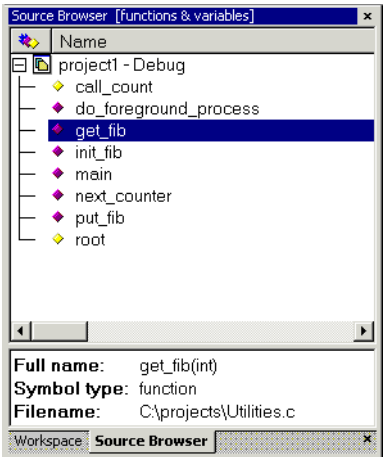


Figure 83: Source Browser window

The window consists of two separate panes. The top pane displays the names of global symbols and functions defined in the project.

Each row is prefixed with an icon, which corresponds to the *Symbol type* classification, see Table 33, *Information in Source Browser window*. By clicking in the window header, you can sort the symbols either by name or by symbol type.

In the top pane you can also access a context menu; see *Source Browser window context menu*, page 208.

For a symbol selected in the top pane, the bottom pane displays the following information:

Type of information	Description
Full name	Displays the unique name of each element, for instance <i>classname::membername</i> .
Symbol type	Displays the symbol type for each element: enumeration, enumeration constant, class, typedef, union, macro, field or variable, function, template function, template class, and configuration.
Filename	Specifies the path to the file in which the element is defined.

Table 33: Information in Source Browser window

For further details about how to use the Source Browser window, see *Displaying browse information*, page 81.

Source Browser window context menu

Right-clicking in the Source Browser window displays a context menu with convenient access to several commands.




Figure 84: Source Browser window context menu

The following commands are available on the context menu:

Menu command	Description
Go to Definition	The editor window will display the definition of the selected item.
Move to Parent	If the selected element is a member of a class, struct, union, enumeration, or namespace, this menu command can be used for moving to its enclosing element.
All Symbols	Type filter; all global symbols and functions defined in the project will be displayed.
All Functions & Variables	Type filter; all functions and variables defined in the project will be displayed.
Non-Member Functions & Variables	Type filter; all functions and variables that are not members of a class will be displayed
Types	Type filter; all types such as structures and classes defined in the project will be displayed.
Constants & Macros	Type filter; all constants and macros defined in the project will be displayed.
All Files	File filter; symbols from all files that you have explicitly added to your project and all files included by them will be displayed.

Table 34: Source Browser window context menu commands

Menu command	Description
Exclude System Includes	File filter; symbols from all files that you have explicitly added to your project and all files included by them will be displayed, except the include files in the IAR Embedded Workbench installation directory.
Only Project Members	File filter; symbols from all files that you have explicitly added to your project will be displayed, but no include files.

Table 34: Source Browser window context menu commands (Continued)

BREAKPOINTS WINDOW

The Breakpoints window—available from the **View** menu—lists all breakpoints. From the window you can conveniently monitor, enable, and disable breakpoints; you can also define new breakpoints and modify existing breakpoints.

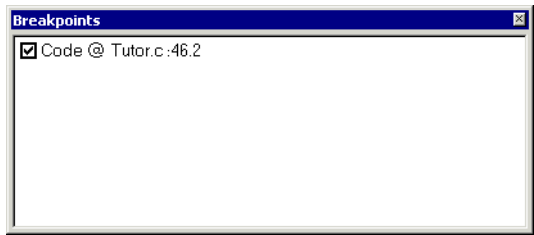


Figure 85: Breakpoints window

All breakpoints you define are displayed in the Breakpoints window.

For more information about the breakpoint system and how to set breakpoints, see the chapter *Using breakpoints* in *Part 4. Debugging*.

Breakpoints window context menu

Right-clicking in the Breakpoints window displays a context menu with several commands.




Figure 86: Breakpoints window context menu

The following commands are available on the context menu:

Menu command	Description
Go to Source	Moves the insertion point to the location of the breakpoint, if the breakpoint has a source location. Double-click a breakpoint in the Breakpoints window to perform the same command.
Edit	Opens the Edit Breakpoint dialog box for the selected breakpoint.
Delete	Deletes the selected breakpoint. Press the Delete key to perform the same command.
Enable	Enables the selected breakpoint. The check box at the beginning of the line will be selected. You can also perform the command by manually selecting the check box. This command is only available if the selected breakpoint is disabled.
Disable	Disables the selected breakpoint. The check box at the beginning of the line will be cleared. You can also perform this command by manually deselecting the check box. This command is only available if the selected breakpoint is enabled.
Enable All	Enables all defined breakpoints.
Disable All	Disables all defined breakpoints.
New Breakpoint	Displays a submenu where you can open the New Breakpoint dialog box for the available breakpoint types. All breakpoints you define using the New Breakpoint dialog box are preserved between debug sessions. In addition to code and log breakpoints—see <i>Code breakpoints dialog box</i> , page 210 and —other types of breakpoints might be available depending on the C-SPY driver you are using. For information about driver-specific breakpoint types, see the driver-specific debugger documentation.

Table 35: Breakpoints window context menu commands

Code breakpoints dialog box

Code breakpoints are triggered when an instruction is fetched from the specified location. If you have set the breakpoint on a specific machine instruction, the breakpoint will be triggered and the execution will stop, before the instruction is executed.

To set a code breakpoint, right-click in the Breakpoints window and choose **New Breakpoint>Code** on the context menu. To modify an existing breakpoint, select it in the Breakpoints window and choose **Edit** on the context menu.

The **Code** breakpoints dialog box appears.

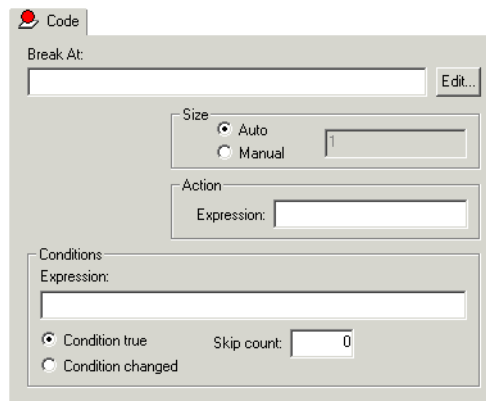


Figure 87: Code breakpoints page

Break At

Specify the location of the breakpoint in the **Break At** text box. Alternatively, click the **Edit** browse button to open the **Enter Location** dialog box; see *Enter Location dialog box*, page 214.

Size

Optionally, you can specify a size—in practice, a *range*—of locations. Each fetch access to the specified memory range will trigger the breakpoint. There are two different ways the size can be specified:

- **Auto**, the size will be set automatically, typically to 1
- **Manual**, you specify the size of the breakpoint range manually in the **Size** text box.

Action

You can optionally connect an action to a breakpoint. Specify an expression, for instance a C-SPY macro function, which is evaluated when the breakpoint is triggered and the condition is true.

Conditions

You can specify simple and complex conditions.

Conditions	Description
Expression	A valid expression conforming to the C-SPY expression syntax.
Condition true	The breakpoint is triggered if the value of the expression is true.
Condition changed	The breakpoint is triggered if the value of the expression has changed since it was last evaluated.
Skip count	The number of times that the breakpoint must be fulfilled before a break occurs (integer).

Table 36: Breakpoint conditions

Log breakpoints dialog box

Log breakpoints are triggered when an instruction is fetched from the specified location. If you have set the breakpoint on a specific machine instruction, the breakpoint will be triggered and the execution will temporarily halt and print the specified message in the C-SPY Debug Log window. This is a convenient way to add trace printouts during the execution of your application, without having to add any code to the application source code.

To set a log breakpoint, right-click in the Breakpoints window and choose **New Breakpoint>Log** on the context menu. To modify an existing breakpoint, select it in the Breakpoints window and choose **Edit** on the context menu.

The **Log** breakpoints dialog box appears.

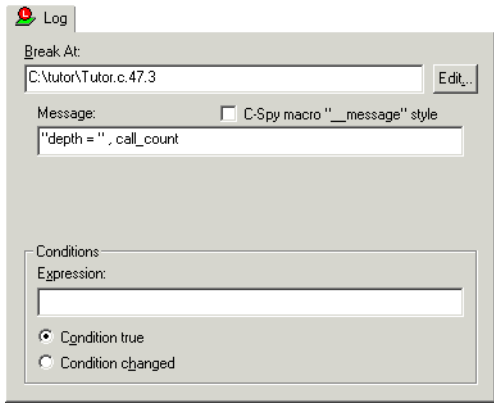


Figure 88: Log breakpoints page

The quickest—and typical—way to set a log breakpoint is by choosing **Toggle Breakpoint (Log)** from the context menu available by right-clicking in either the editor or the Disassembly window. For more information about how to set breakpoints, see *Defining breakpoints*, page 129.

Break At

Specify the location of the breakpoint in the **Break At** text box. Alternatively, click the **Edit** button to open the **Enter Location** dialog box; see *Enter Location dialog box*, page 214.

Message

Specify the message you want to be displayed in the C-SPY Debug Log window. The message can either be plain text, or—if you also select the option **C-SPY macro** **"__message" style**—a comma-separated list of arguments.

C-SPY macro "__message" style

Select this option to make a comma-separated list of arguments specified in the Message text box be treated exactly as the arguments to the C-SPY macro language statement `__message`, see *Formatted output*, page 364.

Conditions

You can specify simple and complex conditions.

Conditions	Description
Expression	A valid expression conforming to the C-SPY expression syntax.
Condition true	The breakpoint is triggered if the value of the expression is true.
Condition changed	The breakpoint is triggered if the value of the expression has changed since it was last evaluated.

Table 37: Log breakpoint conditions

Enter Location dialog box

Use the **Enter Location** dialog box—available from a breakpoints dialog box—to specify the location of the breakpoint.

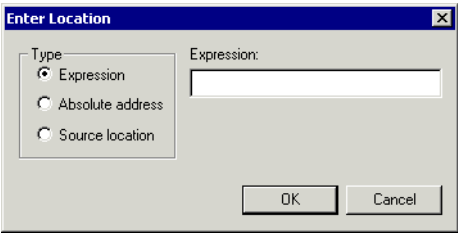


Figure 89: Enter Location dialog box

You can choose between these locations and their possible settings:

Location type	Description/Examples
Expression	Any expression that evaluates to a valid address, such as a function or variable name. Code breakpoints are set on functions and data breakpoints are set on variable names. For example, <code>my_var</code> refers to the location of the variable <code>my_var</code> , and <code>arr[3]</code> refers to the third element of the array <code>arr</code> .
Absolute Address	An absolute location on the form <code>zone:hexaddress</code> or simply <code>hexaddress</code> . Zone specifies in which memory the address belongs. For example <code>Memory:0x42</code> . If you enter a combination of a zone and address that is not valid, C-SPY will indicate the mismatch.
Source Location	A location in the C source code using the syntax: <code>{file path}.row.column</code> . File specifies the filename and full path. Row specifies the row in which you want the breakpoint. Column specifies the column in which you want the breakpoint. Note that the Source Location type is usually meaningful only for code breakpoints. For example, <code>{C:\my_projects\Utilities.c}.22.3</code> sets a breakpoint on the third character position on line 22 in the source file <code>Utilities.c</code> .

Table 38: Location types

BUILD WINDOW

The Build window—available by choosing **View>Messages**—displays the messages generated when building a build configuration. When opened, this window is by default grouped together with the other message windows, see *Windows*, page 191.

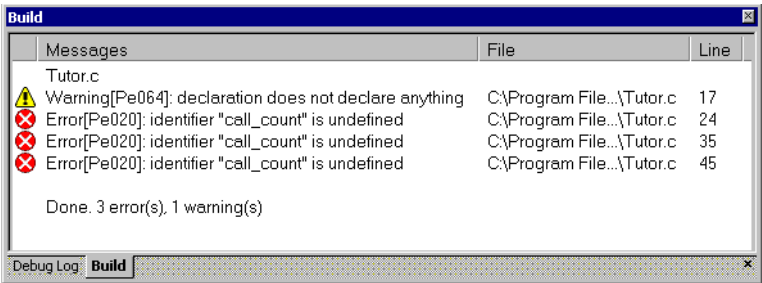


Figure 90: Build window (message window)

Double-clicking a message in the Build window opens the appropriate file for editing, with the insertion point at the correct position.

Right-clicking in the Build window displays a context menu which allows you to copy, select, and clear the contents of the window.




Figure 91: Build window context menu

The **Options** command opens the **Messages** page of the **IDE options** dialog box. On this page you can set options related to messages; see *Messages options*, page 251.

FIND IN FILES WINDOW

The Find in Files window—available by choosing **View>Messages**—displays the output from the **Edit>Find and Replace>Find in Files** command. When opened, this

window is by default grouped together with the other message windows, see *Windows*, page 191.

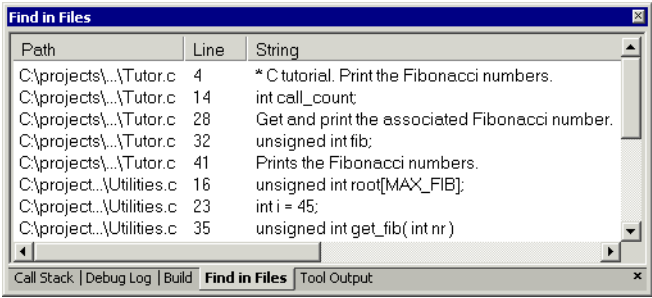


Figure 92: Find in Files window (message window)

Double-clicking an entry in the page opens the appropriate file with the insertion point positioned at the correct location.

Right-clicking in the Find in Files window displays a context menu which allows you to copy, select, and clear the contents of the window.




Figure 93: Find in Files window context menu

TOOL OUTPUT WINDOW

The Tool Output window—available by choosing **View>Messages**—displays any messages output by user-defined tools in the Tools menu, provided that you have selected the option **Redirect to Output Window** in the **Configure Tools** dialog box;

see *Configure Tools dialog box*, page 261. When opened, this window is by default grouped together with the other message windows, see *Windows*, page 191.

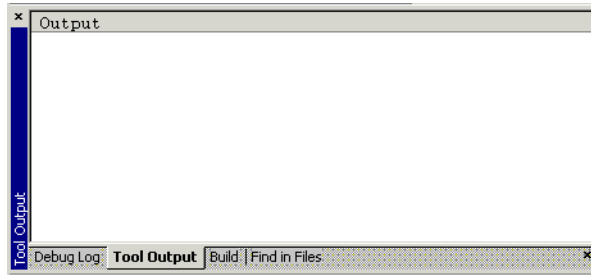


Figure 94: Tool Output window (message window)

Right-clicking in the Tool Output window displays a context menu which allows you to copy, select, and clear the contents of the window.




Figure 95: Tool Output window context menu

DEBUG LOG WINDOW

The Debug Log window—available by choosing **View>Messages**—displays debugger output, such as diagnostic messages and trace information. This output is only available when the C-SPY Debugger is running. When opened, this window is by default grouped together with the other message windows, see *Windows*, page 191.

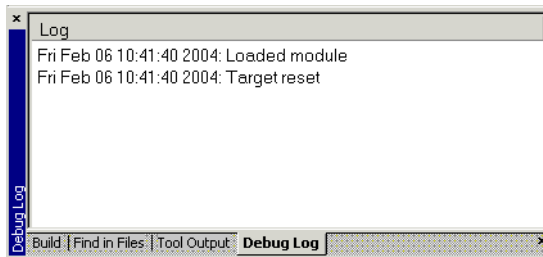


Figure 96: Debug Log window (message window)

Right-clicking in the Tool Output window displays a context menu which allows you to copy, select, and clear the contents of the window.




Figure 97: Debug Log window context menu

Menus

The following menus are available in the IAR Embedded Workbench IDE:

- File menu
- Edit menu
- View menu
- Project menu
- Tools menu
- Window menu
- Help menu.

In addition, a set of C-SPY-specific menus become available when you start the IAR C-SPY Debugger. Reference information about these menus can be found in the chapter *C-SPY® Debugger reference*, page 269.

FILE MENU

The **File** menu provides commands for opening workspaces and source files, saving and printing, and exiting from the IAR Embedded Workbench IDE.

The menu also includes a numbered list of the most recently opened files and workspaces to allow you to open one by selecting its name from the menu.

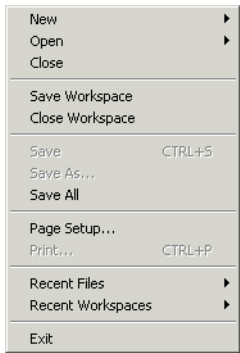


Figure 98: File menu

The following commands are available on the **File** menu:





	Menu command	Shortcut	Description
	New	CTRL+N	Displays a submenu with commands for creating a new workspace, or a new text file.
	Open>File	CTRL+O	Displays a submenu from which you can select a text file to open.
	Open>Workspace		Displays a submenu from which you can select a workspace file to open. Before a new workspace is opened you will be prompted to save and close any currently open workspaces.
	Open>Header/Source File	CTRL+SHIFT+H	Opens the header file or source file that corresponds to the current file, and jumps from the current file to the newly opened file. This command is also available from the context menu available from the editor window.
	Close		Closes the active window. You will be given the opportunity to save any files that have been modified before closing.
	Open Workspace		Displays a dialog box where you can open a workspace file. You will be given the opportunity to save and close any currently open workspace file that has been modified before opening a new workspace.
	Save Workspace		Saves the current workspace file.
	Close Workspace		Closes the current workspace file.

Table 39: File menu commands



	Menu command	Shortcut	Description
	Save	CTRL+S	Saves the current text file or workspace file.
	Save As		Displays a dialog box where you can save the current file with a new name.
	Save All		Saves all open text documents and workspace files.
	Page Setup		Displays a dialog box where you can set printer options.
	Print	CTRL+P	Displays a dialog box where you can print a text document.
	Recent Files		Displays a submenu where you can quickly open the most recently opened text documents.
	Recent Workspaces		Displays a submenu where you can quickly open the most recently opened workspace files.
	Exit		Exits from the IAR Embedded Workbench IDE. You will be asked whether to save any changes to text windows before closing them. Changes to the project are saved automatically.

Table 39: File menu commands (Continued)

EDIT MENU

The **Edit** menu provides several commands for editing and searching.

Undo	Ctrl+Z
Redo	Ctrl+Y
Cut	Ctrl+X
Copy	Ctrl+C
Paste	Ctrl+V
Paste Special...	
Select All	Ctrl+A
Find and Replace	▶
Navigate	▶
Code Templates	▶
Next Error/Tag	F4
Previous Error/Tag	Shift+F4
Complete	Ctrl+Space
Match Brackets	Ctrl+B
Auto Indent	Ctrl+T
Block Comment	Ctrl+K
Block Uncomment	Ctrl+Shift+K
Toggle Breakpoint	F9
Enable/Disable Breakpoint	Ctrl+F9

Figure 99: Edit menu






	Menu command	Shortcut	Description
	Undo	CTRL+Z	Undoes the last edit made to the current editor window.
	Redo	CTRL+Y	Redoes the last Undo in the current editor window. You can undo and redo an unlimited number of edits independently in each editor window.
	Cut	CTRL+X	The standard Windows command for cutting text in editor windows and text boxes.
	Copy	CTRL+C	The standard Windows command for copying text in editor windows and text boxes.
	Paste	CTRL+V	The standard Windows command for pasting text in editor windows and text boxes.
	Paste Special		Provides you with a choice of the most recent contents of the clipboard to choose from when pasting in editor documents.
	Select All	CTRL+A	Selects all text in the active editor window.

Table 40: Edit menu commands






	Menu command	Shortcut	Description
	Find and Replace>Find	CTRL+F	Displays the Find dialog box where you can search for text within the current editor window. Note that if the insertion point is located in the Memory window when you choose the Find command, the dialog box will contain a different set of options than it would otherwise do. If the insertion point is located in the Trace window when you choose the Find command, the Find in Trace dialog box is opened; the contents of this dialog box depend on the C-SPY driver you are using, see the driver documentation for more information.
	Find and Replace>Find Next	F3	Finds the next occurrence of the specified string.
	Find and Replace>Find Previous	SHIFT+F3	Finds the previous occurrence of the specified string.
	Find and Replace>Find Next (Selected)	CTRL+F3	Searches for the next occurrence of the currently selected text or the word currently surrounding the insertion point.
	Find and Replace>Find Previous (Selected)	CTRL+SHIFT+F3	Searches for the previous occurrence of the currently selected text or the word currently surrounding the insertion point.
	Find and Replace>Replace	CTRL+H	Displays a dialog box where you can search for a specified string and replace each occurrence with another string. Note that if the insertion point is located in the Memory window when you choose the Replace command, the dialog box will contain a different set of options than it would otherwise do.
	Find and Replace>Find in Files		Displays a dialog box where you can search for a specified string in multiple text files; see <i>Find in Files dialog box</i> , page 226.
	Find and Replace>Incremental Search	CTRL+I	Displays a dialog box where you can gradually fine-tune or expand the search by continuously changing the search string.
	Navigate>Go To	CTRL+G	Displays a dialog box where you can move the insertion point to a specified line and column in the current editor window.
	Navigate>Toggle Bookmark	CTRL+F2	Toggles a bookmark at the line where the insertion point is located in the active editor window.
	Navigate>Go to Bookmark	F2	Moves the insertion point to the next bookmark that has been defined with the Toggle Bookmark command.

Table 40: Edit menu commands (Continued)

Menu command	Shortcut	Description
Navigate> Navigate Backward	ALT+Left arrow	Navigates backward in the insertion point history. The current position of the insertion point is added to the history by actions like Go to definition and clicking on a result from the Find in Files command.
Navigate> Navigate Forward	ALT+Right arrow	Navigates forward in the insertion point history. The current position of the insertion point is added to the history by actions like Go to definition and clicking on a result from the Find in Files command.
Navigate> Go to Definition	F12	Shows the declaration of the selected symbol or the symbol where the insertion point is placed. This menu command is available when browse information has been enabled, see <i>Project options</i> , page 253.
Code Templates> Insert Template	CTRL+ SHIFT+ SPACE	Displays a list in the editor window from which you can choose a code template to be inserted at the location of the insertion point. If the code template you choose requires any field input, the Template dialog box appears; for information about this dialog box, see <i>Template dialog box</i> , page 228. For information about using code templates, see <i>Using and adding code templates</i> , page 97.
Code Templates> Edit Templates		Opens the current code template file, where you can modify existing code templates and add your own code templates. For information about using code templates, see <i>Using and adding code templates</i> , page 97.
Next Error/Tag	F4	If there is a list of error messages or the results from a Find in Files search in the Messages window, this command will display the next item from that list in the editor window.
Previous Error/Tag	SHIFT+F4	If there is a list of error messages or the results from a Find in Files search in the Messages window, this command will display the previous item from that list in the editor window.
Complete	CTRL+ SPACE	Attempts to complete the word you have begun to type, basing the guess on the contents of the rest of the editor document.
Auto Indent	CTRL+T	Indents one or several lines you have selected in a C/C++ source file. To configure the indentation, see <i>Configure Auto Indent dialog box</i> , page 246.

Table 40: Edit menu commands (Continued)

Menu command	Shortcut	Description
Match Brackets		Selects all text between the brackets immediately surrounding the insertion point, increases the selection to the next hierarchic pair of brackets, or beeps if there is no higher bracket hierarchy.
Block Comment	CTRL+K	Places the C++ comment character sequence <code>//</code> at the beginning of the selected lines.
Block Uncomment	CTRL+K	Removes the C++ comment character sequence <code>//</code> from the beginning of the selected lines.
Toggle Breakpoint	F9	Toggles a breakpoint at the statement or instruction that contains or is located near the cursor in the source window. This command is also available as an icon button in the debug bar.
Enable/Disable Breakpoint	CTRL+F9	Toggles a breakpoint between being disabled, but not actually removed—making it available for future use—and being enabled again.

Table 40: Edit menu commands (Continued)

Find dialog box

The **Find** dialog box is available from the **Edit** menu. Note that the contents of this dialog box look different if you search in an editor window compared to if you search in the Memory window.


Option	Description
Find What	Selects the text to search for.
Match Whole Word Only	Searches the specified text only if it occurs as a separate word. Otherwise specifying <code>int</code> will also find <code>print</code> , <code>sprintf</code> etc. This option is only available when you search in an editor window.
Match Case	Searches only occurrences that exactly match the case of the specified text. Otherwise specifying <code>int</code> will also find <code>INT</code> and <code>Int</code> . This option is only available when you search in an editor window.
Search as Hex	Searches for the specified hexadecimal value. This option is only available when you search in the Memory window.
 Find Next	Finds the next occurrence of the selected text.
Find Previous	Finds the previous occurrence of the selected text.
Stop	Stops an ongoing search. This button is only available during a search in the Memory window.

Table 41: Find dialog box options

Replace dialog box

The **Replace** dialog box is available from the **Edit** menu.

Option	Description
Find What	Selects the text to search for.
Replace With	Selects the text to replace each found occurrence in the Replace With box.
Match Whole Word Only	Searches the specified text only if it occurs as a separate word. Otherwise <code>int</code> will also find <code>print</code> , <code>sprintf</code> etc. This checkbox is not available when you perform the search in the Memory window.
Match Case	Searches only occurrences that exactly match the case of the specified text. Otherwise specifying <code>int</code> will also find <code>INT</code> and <code>Int</code> . This checkbox is not available when you perform the search in the Memory window.
Search as Hex	Searches for the specified hexadecimal value. This checkbox is only available when you perform the search in the Memory window.
Find Next	Searches the next occurrence of the text you have specified.
Replace	Replaces the searched text with the specified text.
Replace All	Replaces all occurrences of the searched text in the current editor window.

Table 42: Replace dialog box options

Find in Files dialog box

Use the **Find in Files** dialog box—available from the **Edit** menu—to search for a string in files.

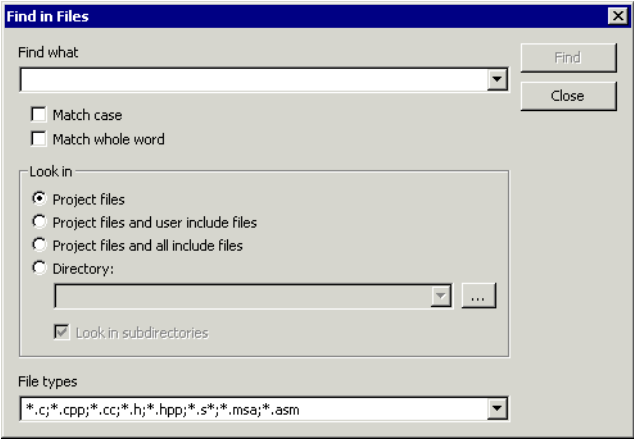


Figure 100: Find in Files dialog box

The result of the search appears in the Find in Files messages window—available from the **View** menu. You can then go to each occurrence by choosing the **Edit>Next Error/Tag** command, alternatively by double-clicking the messages in the Find in Files messages window. This opens the corresponding file in an editor window with the insertion point positioned at the start of the specified text. A blue flag in the left-most margin indicates the line.

In the **Find in Files** dialog box, you specify the search criteria with the following settings.

Find what

A text field in which you type the string you want to search for. There are two options for fine-tuning the search:

- Match case** Searches only for occurrences that exactly match the case of the specified text. Otherwise specifying `int` will also find `INT` and `Int`.
- Match whole word** Searches only for the string when it occurs as a separate word. Otherwise `int` will also find `print`, `sprintf` and so on.

Look in

The options in the **Look in** area lets you specify which files you want to search in for a specified string. Choose between:

Project files	The search will be performed in all files that you have explicitly added to your project.
Project files and user include files	The search will be performed in all files that you have explicitly added to your project and all files included by them, except the include files in the IAR Embedded Workbench installation directory.
Project files and all include files	The search will be performed in all project files that you have explicitly added to your project and all files included by them.
Directory	The search will be performed in the directory that you specify. Recent search locations are saved in the drop-down list. Locate the directory using the browse button.
Look in subdirectories	The search will be performed in the directory that you have specified and all its subdirectories.

File types

This is a filter for choosing which type of files to search; the filter applies to all options in the **Look in** area. Choose the appropriate filter from the drop-down list. Note that the **File types** text field is editable, which means that you can add your own filters. Use the * character to indicate zero or more unknown characters of the filters, and the ? character to indicate one unknown character.

Stop

Stops an ongoing search. This function button is only available during an ongoing search.

Incremental Search dialog box

The **Incremental Search** dialog box—available from the **Edit** menu—lets you gradually fine-tune or expand the search string.




Figure 101: Incremental Search dialog box

Find What

Type the string to search for. The search will be performed from the location of the insertion point—the *start point*. Gradually incrementing the search string will gradually expand the search criteria. Backspace will remove a character from the search string; the search will be performed on the remaining string and will start from the start point.

If a word in the editor window is selected when you open the **Incremental Search** dialog box, this word will be displayed in the **Find What** text box.

Match Case

Use this option to find only occurrences that exactly match the case of the specified text. Otherwise searching for `int` will also find `INT` and `Int`.

Function buttons

Function button	Description
Find Next	Searches for the next occurrence of the current search string. If the Find What text box is empty when you click the Find Next button, a string to search for will automatically be selected from the drop-down list. To search for this string, click Find Next .
Close	Closes this dialog box.

Table 43: Incremental Search function buttons

Template dialog box

Use the **Template** dialog box to specify any field input that is required by the source code template you insert. This dialog box appears when you insert a code template that requires any field input.

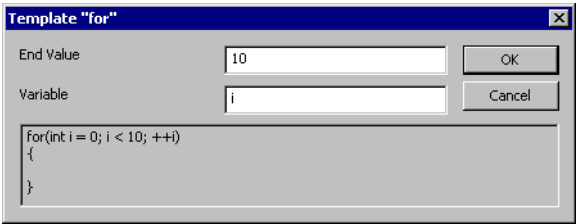


Figure 102: Template dialog box

Note: This figure reflects the default code template that can be used for automatically inserting code for a `for` loop.

The contents of this dialog box match the code template. In other words, which fields that appear depends on how the code template is defined.

At the bottom of the dialog box, the code that would result from the code template is displayed.

For more information about using code templates, see *Using and adding code templates*, page 97.

VIEW MENU

With the commands on the **View** menu you can choose what to display in the IAR Embedded Workbench IDE. During a debug session you can also open debugger-specific windows from the **View** menu.




Figure 103: View menu

Menu command	Description
Messages	Opens a submenu which gives access to the message windows—Build, Find in Files, Tool Output, Debug Log—that display messages and text output from the IAR Embedded Workbench commands. If the window you choose from the menu is already open, it becomes the active window.
Workspace	Opens the current Workspace window.
Source Browser	Opens the Source Browser window.
Breakpoints	Opens the Breakpoints window.
Toolbars	The options Main and Debug toggle the two toolbars on and off.
Status bar	Toggles the status bar on and off.

Table 44: View menu commands

Menu command	Description
Debugger windows	During a debugging session, the different debugging windows are also available from the View menu: Disassembly window Memory window Symbolic Memory window Register window Watch window Locals window Statics window Auto window Live Watch window Quick Watch window Call Stack window Terminal I/O window Code Coverage window Profiling window Stack window For descriptions of these windows, see <i>C-SPY windows</i> , page 269.

Table 44: View menu commands (Continued)

PROJECT MENU

The **Project** menu provides commands for working with workspaces, projects, groups, and files, as well as specifying options for the build tools, and running the tools on the current project.

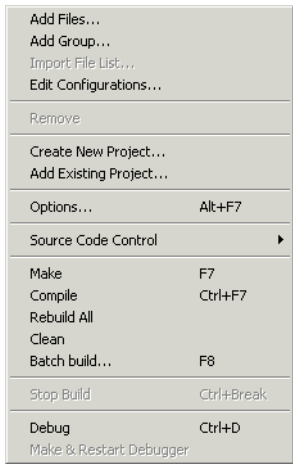


Figure 104: Project menu

Menu Command	Description
Add Files	Displays a dialog box that where you can select which files to include to the current project.
Add Group	Displays a dialog box where you can create a new group. The Group Name text box specifies the name of the new group. The Add to Target list selects the targets to which the new group should be added. By default the group is added to all targets.
Import File List	Displays a standard Open dialog box where you can import information about files and groups from projects created using another IAR tool chain. To import information from project files which have one of the older filename extensions <code>pew</code> or <code>prj</code> you must first have exported the information using the context menu command Export File List available in your own IAR Embedded Workbench.
Edit Configurations	Displays the Configurations for project dialog box, where you can define new or remove existing build configurations.

Table 45: Project menu commands




Menu Command		Description
	Remove	In the Workspace window, removes the selected item from the workspace.
	Create New Project	Displays a dialog box where you can create a new project and add it to the workspace.
	Add Existing Project	Displays a dialog box where you can add an existing project to the workspace.
	Options Alt+F7	Displays the Options for node dialog box, where you can set options for the build tools on the selected item in the Workspace window. You can set options on the entire project, on a group of files, or on an individual file.
	Source Code Control	Opens a submenu with commands for source code control, see <i>Source Code Control menu</i> , page 197.
	Make F7	Brings the current build configuration up to date by compiling, assembling, and linking only the files that have changed since the last build.
	Compile Ctrl+F7	Compiles or assembles the currently selected file, files, or group. One or more files can be selected in the Workspace window—all files in the same project, but not necessarily in the same group. You can also select the editor window containing the file you want to compile. The Compile command is only enabled if <i>every</i> file in the selection is individually suitable for the command. You can also select a <i>group</i> , in which case the command is applied to each file in the group (including inside nested groups) that can be compiled, even if the group contains files that cannot be compiled, such as header files.
	Rebuild All	Rebuilds and relinks all files in the current target.
	Clean	Removes any intermediate files.
	Batch BuildF8	Displays a dialog box where you can configure named batch build configurations, and build a named batch.
	Stop BuildCtrl+Break	Stops the current build operation.
	Debug Ctrl+D	Starts the IAR C-SPY Debugger so that you can debug the project object file. If necessary, a make will be performed before running C-SPY to ensure the project is up to date. Depending on your IAR product installation, you can choose which debugger drive to use by selecting the appropriate C-SPY driver on the C-SPY Setup page available by using the Project>Options command.

Table 45: Project menu commands (Continued)



Menu Command	Description
Make & Restart Debugger	Stops the debugger, makes the active build configuration, and starts the debugger again; all in a single command. This button is only available during debugging.

Table 45: Project menu commands (Continued)

Argument variables summary

Variables can be used for paths and arguments. The following argument variables can be used:

Variable	Description
\$CUR_DIR\$	Current directory
\$CUR_LINE\$	Current line
\$EW_DIR\$	Top directory of IAR Embedded Workbench, for example c:\program files\iar systems\embedded workbench 5.n
\$EXE_DIR\$	Directory for executable output
\$FILE_BNAME\$	Filename without extension
\$FILE_BPATH\$	Full path without extension
\$FILE_DIR\$	Directory of active file, no filename
\$FILE_FNAME\$	Filename of active file without path
\$FILE_PATH\$	Full path of active file (in Editor, Project, or Message window)
\$LIST_DIR\$	Directory for list output
\$OBJ_DIR\$	Directory for object output
\$PROJ_DIR\$	Project directory
\$PROJ_FNAME\$	Project file name without path
\$PROJ_PATH\$	Full path of project file
\$TARGET_DIR\$	Directory of primary output file
\$TARGET_BNAME\$	Filename without path of primary output file and without extension
\$TARGET_BPATH\$	Full path of primary output file without extension
\$TARGET_FNAME\$	Filename without path of primary output file
\$TARGET_PATH\$	Full path of primary output file
\$TOOLKIT_DIR\$	Directory of the active product, for example c:\program files\iar systems\embedded workbench 5.n\cpuname

Table 46: Argument variables

Variable	Description
<code>\$_ENVVAR_\$</code>	The environment variable <code>ENVVAR</code> . Any name within <code>\$_</code> and <code>_</code> \$ will be expanded to that system environment variable.

Table 46: Argument variables (Continued)

Configurations for project dialog box

In the **Configuration for project** dialog box—available by choosing **Project>Edit Configurations**—you can define new build configurations for the selected project; either entirely new, or based on a previous project.

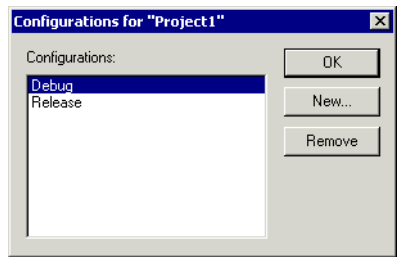


Figure 105: Configurations for project dialog box

The dialog box contains the following:

Operation	Description
Configurations	Lists existing configurations, which can be used as templates for new configurations.
New	Opens a dialog box where you can define new build configurations.
Remove	Removes the configuration that is selected in the Configurations list.

Table 47: Configurations for project dialog box options

New Configuration dialog box

In the **New Configuration** dialog box—available by clicking **New** in the **Configurations for project** dialog box—you can define new build configurations; either entirely new, or based on any currently defined configuration.

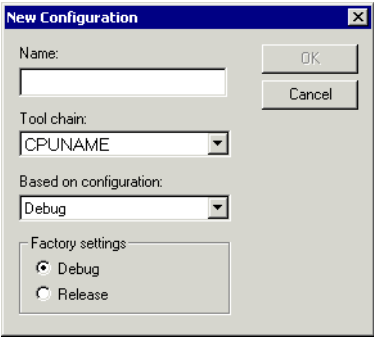


Figure 106: New Configuration dialog box

The dialog box contains the following:

Item	Description
Name	The name of the build configuration.
Tool chain	The target to build for. If you have several versions of IAR Embedded Workbench for different targets installed on your host computer, the drop-down list can contain these targets.
Based on configuration	A currently defined build configuration that you want the new configuration to be based on. The new configuration will inherit the project settings as well as information about the factory settings from the old configuration. If you select None, the new configuration will have default factory settings and not be based on an already defined configuration.
Factory settings	Specifies the default factory settings—either Debug or Release—that you want to apply to your new build configuration. These factory settings will be used by your project if you press the Factory Settings button in the Options dialog box.

Table 48: New Configuration dialog box options

Create New Project dialog box

The **Create New Project** dialog box is available from the **Project** menu, and lets you create a new project based on a template project. There are template projects available

for C/C++ applications, assembler applications, and library projects. You can also create your own template projects.

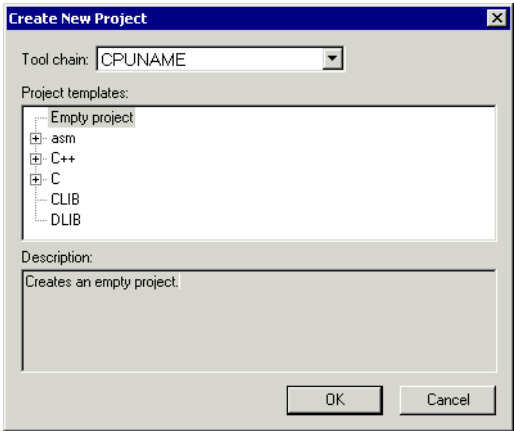


Figure 107: Create New Project dialog box

The dialog box contains the following:

Item	Description
Tool chain	The target to build for. If you have several versions of IAR Embedded Workbench for different targets installed on your host computer, the drop-down list can contain these targets.
Project templates	Lists all available template projects that you can base a new project on.

Table 49: Description of Create New Project dialog box

Options dialog box

The **Options** dialog box is available from the **Project** menu.

In the **Category** list you can select the build tool for which you want to set options. The options available in the **Category** list will depend on the tools installed in your IAR Embedded Workbench IDE, and will typically include the following options:

Category	Description
General Options	General options
C/C++ Compiler	IAR C/C++ Compiler options
Assembler	IAR Assembler options

Table 50: Project option categories

Category	Description
Custom Build	Options for extending the tool chain
Build Actions	Options for pre-build and post-build actions
Linker	IAR XLINK Linker options. This category is available for application projects.
Library Builder	IAR XAR Library Builder options. This category is available for library projects.
Debugger	IAR C-SPY Debugger options
Simulator	Simulator-specific options

Table 50: Project option categories (Continued)

Note: Additional debugger categories might be available depending on the debugger drivers installed.

Selecting a category displays one or more pages of options for that component of the IAR Embedded Workbench IDE.

For detailed information about each option, see the option reference chapters:

- *General options*
- *Compiler options*
- *Assembler options*
- *Custom build options*
- *Build actions options*
- *Linker options*
- *Library builder options*
- *Debugger options.*

For information about the options related to available hardware debugger systems, see the online help system.

Batch Build dialog box

The **Batch Build** dialog box—available by choosing **Project>Batch build**—lists all defined batches of build configurations.

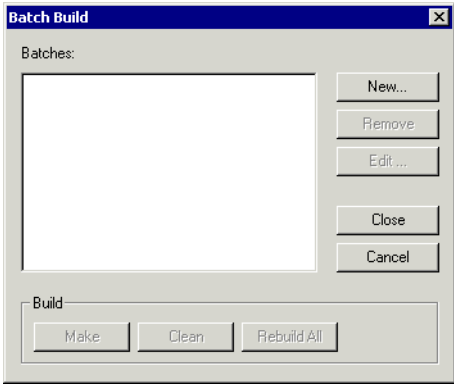


Figure 108: Batch Build dialog box

The dialog box contains the following:

Item	Description
Batches	Lists all currently defined batches of build configurations.
New	Displays the Edit Batch Build dialog box, where you can define new batches of build configurations.
Remove	Removes the selected batch.
Edit	Displays the Edit Batch Build dialog box, where you can modify already defined batches.
Build	Consists of the three build commands Make , Clean , and Rebuild All .

Table 51: Description of the Batch Build dialog box

Edit Batch Build dialog box

In the **Edit Batch Build** dialog box—available from the **Batch Build** dialog box—you can create new batches of build configurations, and edit already existing batches.

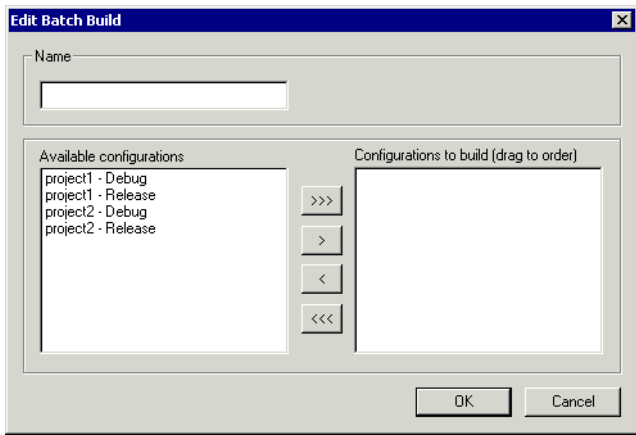


Figure 109: Edit Batch Build dialog box

The dialog box contains the following:

Item	Description
Name	The name of the batch.
Available configurations	Lists all build configurations that are part of the workspace.
Configurations to build	Lists all the build configurations you select to be part of a named batch.

Table 52: Description of the Edit Batch Build dialog box

To move appropriate build configurations from the **Available configurations** list to the **Configurations to build** list, use the arrow buttons. Note also that you can drag the build configurations in the **Configurations to build** field to specify the order between the build configurations.

TOOLS MENU

The **Tools** menu provides commands for customizing the environment, such as changing common fonts and shortcut keys.

It is a user-configurable menu to which you can add tools for use with IAR Embedded Workbench. Thus, it might look different depending on which tools have been preconfigured to appear as menu items. See *Configure Tools dialog box*, page 261.




Figure 110: Tools menu

Tools menu commands

Menu command	Description
Options	Displays the IDE Options dialog box where you can customize the IAR Embedded Workbench IDE. In the left side of the dialog box, select a category and the corresponding options are displayed in the right side of the dialog box. Which categories that are available in this dialog box depends on your IAR Embedded Workbench IDE configuration, and whether the IDE is in a debugging session or not.
Configure Tools	Displays a dialog box where you can set up the interface to use external tools.
Filename Extensions	Displays a set of dialog boxes where you can define the filename extensions to be accepted by the build tools.
Configure Viewers	Displays a dialog box where you can configure viewer applications to open documents with.
Notepad	User-configured. This is an example of a user-configured addition to the Tools menu.

Table 53: Tools menu commands

COMMON FONTS OPTIONS

Use the **Common Fonts** options—available by choosing **Tools>Options**—for configuring the fonts used for all project windows except the editor windows.

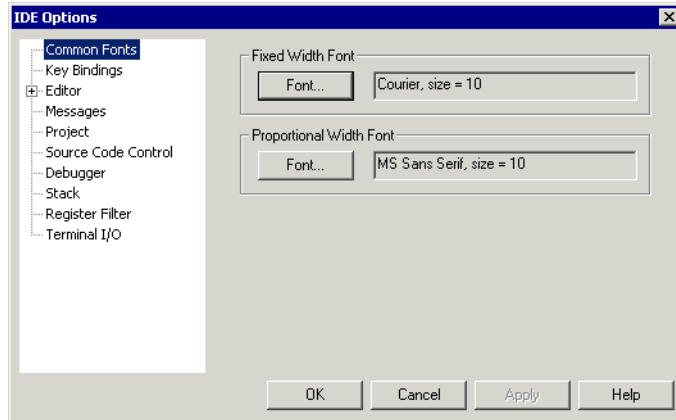


Figure 111: Common Fonts options

With the **Font** buttons you can change the fixed and proportional width fonts, respectively.

Any changes to the **Fixed Width Font** options will apply to the Disassembly, Register, and Memory windows. Any changes to the **Proportional Width Font** options will apply to all other windows.

None of the settings made on this page apply to the editor windows. For information about how to change the font in the editor windows, see *Editor Colors and Fonts options*, page 250.

KEY BINDINGS OPTIONS

Use the **Key Bindings** options—available by choosing **Tools>Options**—to customize the shortcut keys used for the IAR Embedded Workbench IDE menu commands.

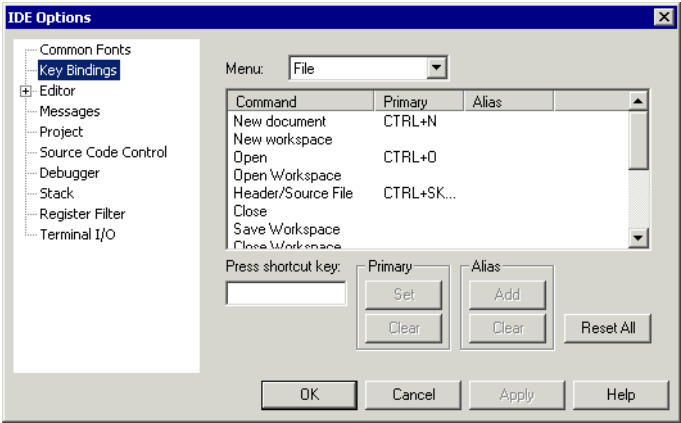


Figure 112: Key Bindings options

Menu

Use the drop-down list to choose the menu you want to edit. Any currently defined shortcut keys are shown in the scroll list below.

Command

All commands available on the selected menu are listed in the **Commands** column. Select the menu command for which you want to configure your own shortcut keys.

Press shortcut key

Use the text field to type the key combination you want to use as shortcut key. It is not possible to set or add a shortcut if it is already used by another command.

Primary

The shortcut key will be displayed next to the command on the menu. Click the **Set** button to set the combination for the selected command, or the **Clear** button to delete the shortcut.

Alias

The shortcut key will work but not be displayed on the menu. Click either the **Add** button to make the key take effect for the selected command, or the **Clear** button to delete the shortcut.

Reset All

Reverts all command shortcut keys to the factory settings.

LANGUAGE OPTIONS

Use the **Language** options—available by choosing **Tools>Options**—to specify the language to be used in windows, menus, dialog boxes, etc.

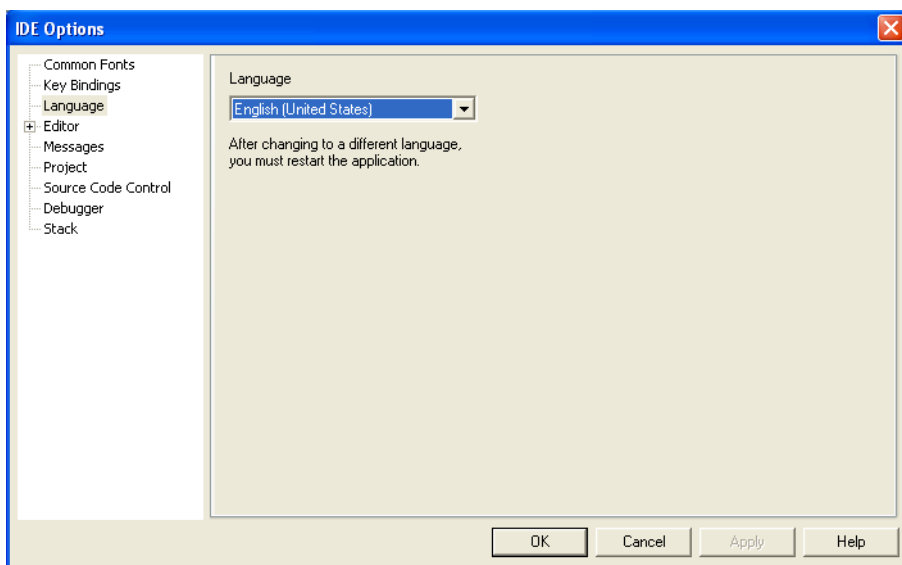


Figure 113: Language options

Language

Use the drop-down list to choose the language to be used.

The languages that can be selected depend on your product version.

Note: If you have IAR Embedded Workbench IDE installed for several different tool chains in the same directory, the IDE might be in mixed languages if the tool chains are available in different languages.

EDITOR OPTIONS

Use the **Editor** options—available by choosing **Tools>Options**—to configure the editor.

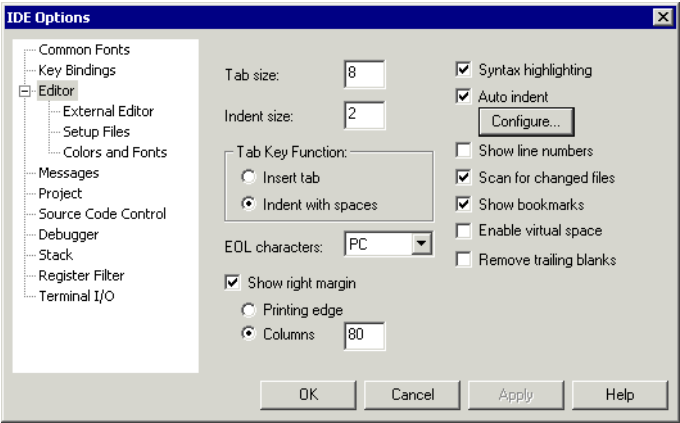


Figure 114: Editor options

For more information about the IAR Embedded Workbench IDE Editor and how it can be used, see *Editing*, page 93.

Tab Size

Use this option to specify the number of character spaces corresponding to each tab.

Indent Size

Use this option to specify the number of character spaces to be used for indentation.

Tab Key Function

Use this option to specify how the Tab key is used. Choose between:

- **Insert tab**
- **Indent with spaces.**

EOL character

Use this option to select the line break character to be used when editor documents are saved. Choose between:

PC (default)	Windows and DOS end of line characters. The PC format is used by default.
Unix	UNIX end of line characters.
Preserve	The same end of line character as the file had when it was opened, either PC or UNIX. If both types or neither type are present in the opened file, PC end of line characters will be used.

Show right margin

The area of the editor window outside the right-side margin is displayed as a light gray field. You can choose to set the size of the text field between the left-side margin and the right-side margin. Choose to set the size based on:

Printing edge	Size based on the printable area which is based on general printer settings.
Columns	Size based on number of columns.

Syntax Highlighting

Use this option to make the editor display the syntax of C or C++ applications in different text styles.

To read more about syntax highlighting, see *Editor Colors and Fonts options*, page 250, and *Syntax coloring*, page 95.

Auto Indent

Use this option to ensure that when you press Return, the new line will automatically be indented. For C/C++ source files, indentation will be performed as configured in the **Configure Auto Indent** dialog box. Click the **Configure** button to open the dialog box where you can configure the automatic indentation; see *Configure Auto Indent dialog box*, page 246. For all other text files, the new line will have the same indentation as the previous line.

Show Line Numbers

Use this option to display line numbers in the editor window.

Scan for Changed Files

Use this option to check if files have been modified by some other tool. In that case the files will be automatically reloaded. If a file has been modified in the IAR Embedded Workbench IDE, you will be prompted first.

Show Bookmarks

Use this option to display a column on the left side in the editor window, with icons for compiler errors and warnings, **Find in Files** results, user bookmarks and breakpoints.

Enable Virtual Space

Use this option to allow the insertion point to move outside the text area.

Remove trailing blanks

Use this option to remove trailing blanks from files when they are saved to disk. Trailing blanks are blank spaces between the last non-blank character and the end of line character.

CONFIGURE AUTO INDENT DIALOG BOX

Use the **Configure Auto Indent** dialog box to configure the automatic indentation performed by the editor for C/C++ source code. To open the dialog box:

- 1 Choose **Tools>Options**.
- 2 Click the **Editor** tab.
- 3 Select the **Auto indent** option.
- 4 Click the **Configure** button.

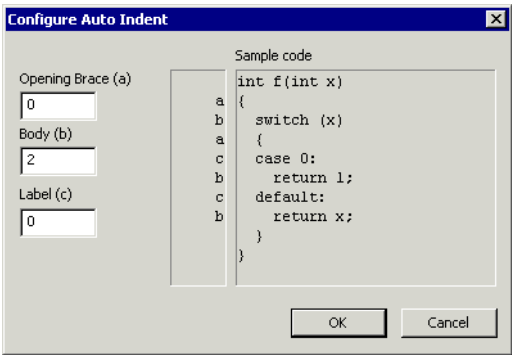


Figure 115: Configure Auto Indent dialog box

To read more about indentation, see *Automatic text indentation*, page 96.

Opening Brace (a)

Use the text box to type the number of spaces used for indenting an opening brace.

Body (b)

Use the text box to type the number of additional spaces used for indenting code after an opening brace, or a statement that continues onto a second line.

Label (c)

Use the text box to type the number of additional spaces used for indenting a label, including case labels.

Sample code

This area reflects the settings made in the text boxes for indentation. All indentations are relative to the preceding line, statement, or other syntactic structures.

EXTERNAL EDITOR OPTIONS

Use the **External Editor** options—available by choosing **Tools>Options**—to specify an external editor of your choice.

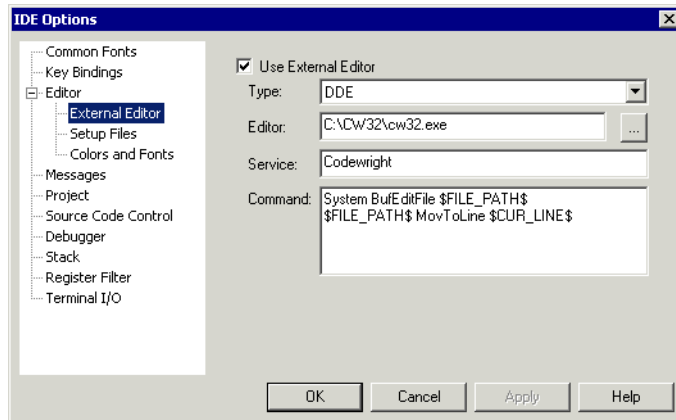


Figure 116: External Editor options

See also *Using an external editor*, page 100.

Use External Editor

Use this option to enable the use of an external editor.

Type

Use the drop-down list to select the type of interface. Choose between:

- **Command Line**
- **DDE** (Windows Dynamic Data Exchange).

Editor

Use the text field to specify the filename and path of your external editor. A browse button is available for your convenience.

Arguments

Use the text field to specify any arguments to pass to the editor. Only applicable if you have selected **Command Line** as the interface type, see *Type*, page 248.

Service

Use the text field to specify the DDE service name used by the editor. Only applicable if you have selected **DDE** as the interface type, see *Type*, page 248.

The service name depends on the external editor that you are using. Refer to the user documentation of your external editor to find the appropriate settings.

Command

Use the text field to specify a sequence of command strings to send to the editor. The command strings should be typed as:

```
DDE-Topic CommandString
DDE-Topic CommandString
```

Only applicable if you have selected **DDE** as the interface type, see *Type*, page 248.

The command strings depend on the external editor that you are using. Refer to the user documentation of your external editor to find the appropriate settings.



Note: Variables can be used in arguments. See *Argument variables summary*, page 233, for information about available argument variables.

EDITOR SETUP FILES OPTIONS

Use the **Editor Setup Files** options—available by choosing **Tools>Options**—to specify setup files for the editor.

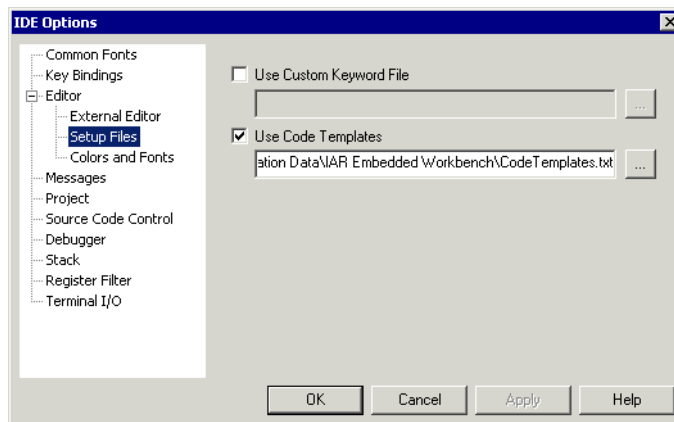


Figure 117: Editor Setup Files options

Use Custom Keyword File

Use this option to specify a text file containing keywords that you want the editor to highlight. For information about syntax coloring, see *Syntax coloring*, page 95.

Use Code Templates

Use this option to specify a text file with code templates that you can use for inserting frequently used code in your source file. For information about using code templates, see *Using and adding code templates*, page 97.

EDITOR COLORS AND FONTS OPTIONS

Use the **Editor Colors and Fonts** options—available by choosing **Tools>Options**—to specify the colors and fonts used for text in the editor windows.

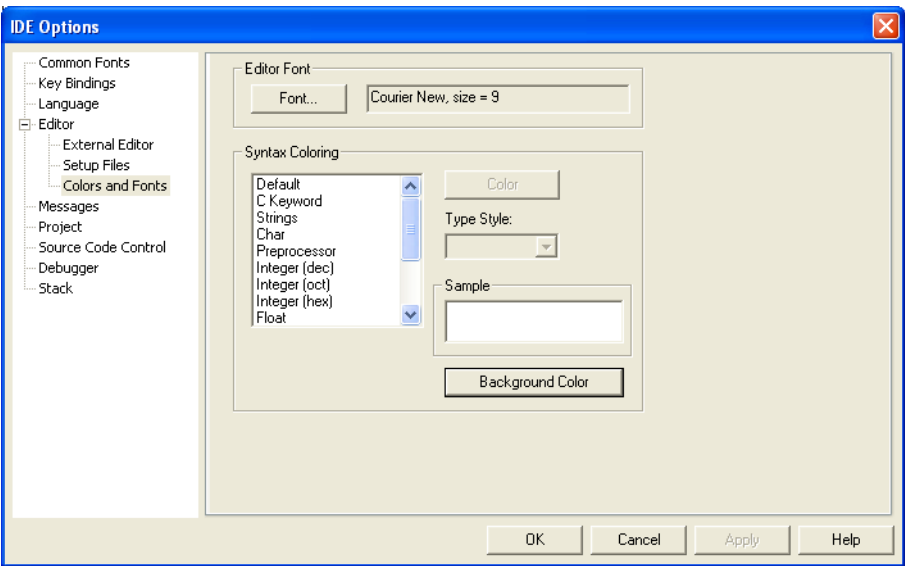


Figure 118: Editor Colors and Fonts options

Editor Font

Press the **Font** button to open the standard **Font** dialog box where you can choose the font and its size to be used in editor windows.

Syntax Coloring

Use the **Syntax Coloring** options to choose color and type style for selected elements. The elements you can customize are: C or C++, compiler keywords, assembler keywords, and user-defined keywords. Use the following options:

Scroll-bar list	Lists the possible items for which you can specify font and style of syntax.
Color	Provides a list of colors to choose from for the selected element.
Type Style	Provides a list of type styles to choose from.
Sample	Displays the current setting.

Background Color Provides a list of background colors to choose from for the editor window.

The keywords controlling syntax highlighting for assembler and C or C++ source code are specified in the files `syntax_icc.cfg` and `syntax_asm.cfg`, respectively. These files are located in the `config` directory.

MESSAGES OPTIONS

Use the **Messages** options—available by choosing **Tools>Options**—to choose the amount of output in the Build messages window.

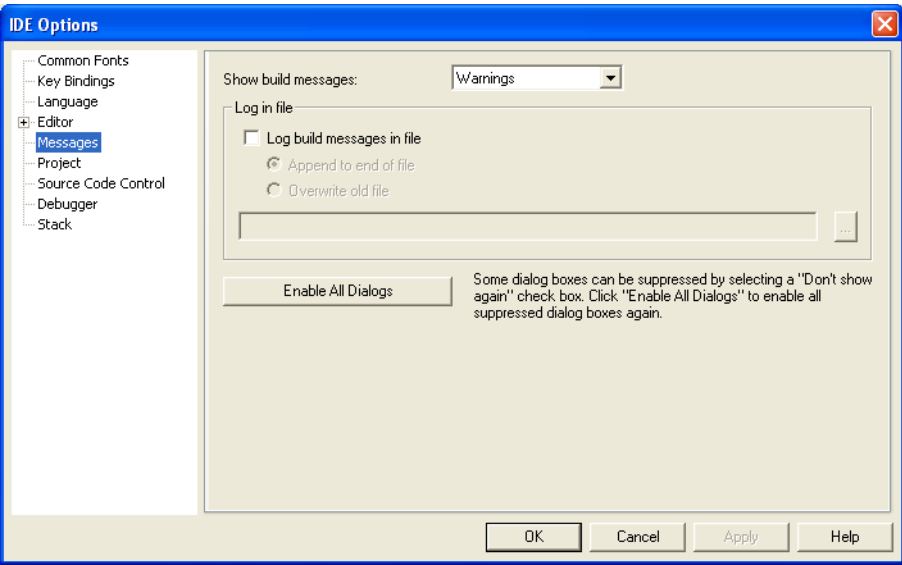


Figure 119: Messages option

Show build messages

Use this drop-down menu to specify the amount of output in the Build messages window. Choose between:

- All** Shows all messages, including compiler and linker information.
- Messages** Shows messages, warnings, and errors.
- Warnings** Shows warnings and errors.
- Errors** Shows errors only.

Log File

Use these options to write build messages to a log file. To enable the options, select the **Enable build log file** option. Choose between:

Append to end of file Appends the messages at the end of the specified file.

Overwrite old file Replaces the contents in the file you specify.

Type the filename you want to use in the text box. A browse button is available for your convenience.

Enable All Dialogs

The **Enable All Dialogs** button enables all suppressed dialog boxes.

Some dialog boxes can be suppressed by selecting a **Don't show again** check box, for example:




Figure 120: Message dialog box containing a Don't show again option

PROJECT OPTIONS

Use the **Project** options—available by choosing **Tools>Options**—to set options for the **Make** and **Build** commands.

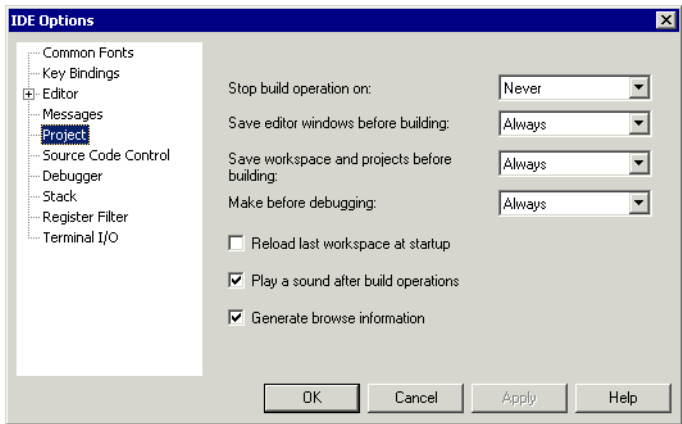


Figure 121: Projects options

The following options are available:

Option	Description
Stop build operation on	Specifies when the build operation should stop. Never: Do not stop. Warnings: Stop on warnings and errors. Errors: Stop on errors.
Save editor windows before building	Always: Always save before Make or Build. Ask: Prompt before saving. Never: Do not save.
Save workspace and projects before building	Always: Always save before Make or Build. Ask: Prompt before saving. Never: Do not save.
Make before debugging	Always: Always perform the Make command before debugging. Ask: Always prompt before performing the Make command. Never: Do not perform the Make command before debugging.

Table 54: Project IDE options

Option	Description
Reload last workspace at startup	Select this option if you want the last active workspace to load automatically the next time you start IAR Embedded Workbench.
Play a sound after build operations	Plays a sound when the build operations are finished.
Generate browse information	Enables the use of the Source Browser window, see <i>Source Browser window</i> , page 207.

Table 54: Project IDE options (Continued)

SOURCE CODE CONTROL OPTIONS

Use the **Source Code Control** options—available by choosing **Tools>Options**—to configure the interaction between an IAR Embedded Workbench project and an SCC project.

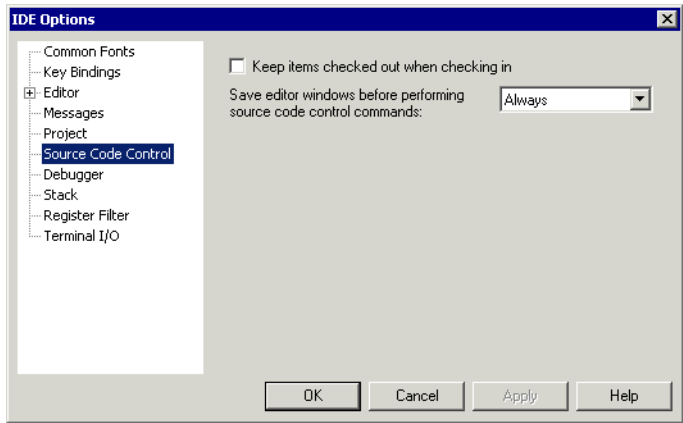


Figure 122: Source Code Control options

Keep items checked out when checking in

Determines the default setting for the option **Keep Checked Out** in the **Check In Files** dialog box; see *Check In Files dialog box*, page 200.

Save editor windows before performing source code control commands

Specifies whether editor windows should be saved before you perform any source code control commands. Choose between:

- | | |
|---------------|---|
| Ask | When you perform any source code control commands, you will be asked about saving editor windows first. |
| Never | Editor windows will <i>never</i> be saved first when you perform any source code control commands. |
| Always | Editor windows will <i>always</i> be saved first when you perform any source code control commands. |

DEBUGGER OPTIONS

Use the **Debugger** options—available by choosing **Tools>Options**—for configuring the debugger environment.

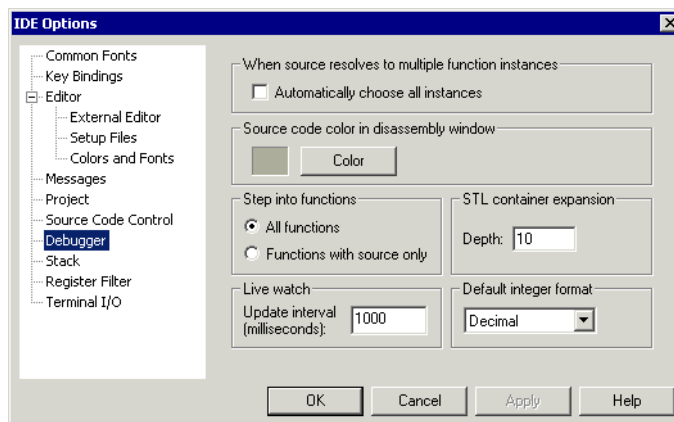


Figure 123: Debugger options

When source resolves to multiple function instances

Some source code corresponds to multiple code instances, for example template code. When specifying a source location in such code, for example when setting a source breakpoint, you can make C-SPY act on all instances or a subset of instances. Use the **Automatically choose all instances** option to let C-SPY act on all instances without asking first.

Source code color in Disassembly window

Use the **Color** button to select the color of the source code in the Disassembly window.

Step into functions

Use this option to control the behavior of the **Step Into** command. Choose between:

All functions

The debugger will step into all functions.

Functions with source only

The debugger will only step into functions for which the source code is known. This helps you avoid stepping into library functions or entering disassembly mode debugging.

STL container expansion

The **Depth** value decides how many elements that are shown initially when a container value is expanded in, for example, the Watch window. Additional elements can be shown by clicking the expansion arrow.

Live watch

The **Update interval** value decides how often the C-SPY Live Watch window is updated during execution.

Default integer format

Use the drop-down list to set the default integer format in the Watch, Locals, and related windows.

STACK OPTIONS

Use the **Stack** options—available by choosing **Tools>Options** or from the context menu in the Memory window—to set options specific to the Stack window.

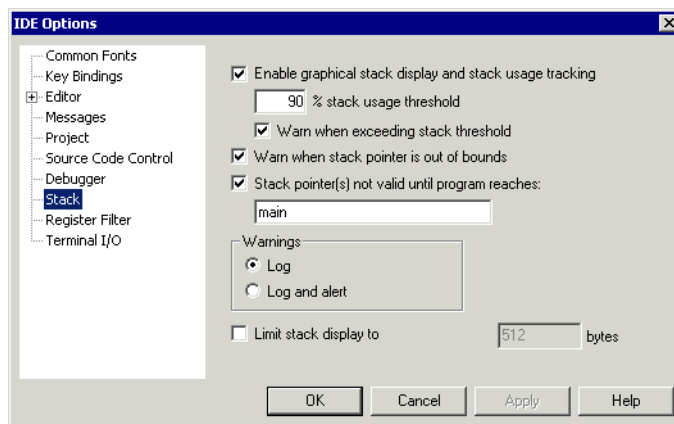


Figure 124: Stack options

Enable graphical stack display and stack usage tracking

Use this option to enable the graphical stack bar available at the top of the Stack window. At the same time, it enables the functionality needed to detect stack overflows. To read more about the stack bar and the information it provides, see *The graphical stack bar*, page 294.

% stack usage threshold

Use this text field to specify the percentage of stack usage above which C-SPY should issue a warning for stack overflow.

Warn when exceeding stack threshold

Use this option to make C-SPY issue a warning when the stack usage exceeds the threshold specified in the **% stack usage threshold** option.

Warn when stack pointer is out of bounds

Use this option to make C-SPY issue a warning when the stack pointer is outside the stack memory range.

Stack pointer(s) not valid until reaching

Use this option to specify a *location* in your application code from where you want the stack display and verification to take place. The Stack window will not display any information about stack usage until execution has reached this location. By default, C-SPY will not track the stack usage before the `main` function. If your application does not have a `main` function, for example, if it is an assembler-only project, you should specify your own start label. If this option is used, after each reset C-SPY keeps a breakpoint on the given location until it is reached.

Typically, the stack pointer is set up in the system initialization code `cstartup`, but not necessarily from the very first instruction. By using this option you can avoid incorrect warnings or misleading stack display for this part of the application.

Warnings

You can choose to issue warnings using one of the following options:

Log	Warnings are issued in the Debug Log window
Log and alert	Warnings are issued in the Debug Log window and as alert dialog boxes.

Limit stack display to

Use this option to limit the amount of memory displayed in the Stack window by specifying a number, counting from the stack pointer. This can be useful if you have a big stack or if you are only interested in the topmost part of the stack. Using this option can improve the Stack window performance, especially if reading memory from the target system is slow. By default, the Stack window shows the whole stack, or in other words, from the stack pointer to the bottom of the stack. If the debugger cannot determine the memory range for the stack, the byte limit is used even if the option is not selected.

Note: The Stack window does not affect the execution performance of your application, but it might read a large amount of data to update the displayed information when the execution stops.

REGISTER FILTER OPTIONS

Use the **Register Filter** options—available by choosing **Tools>Options** when the IAR C-SPY Debugger is running—to display registers in the Register window in groups you have created yourself. For more information about register groups, see *Register groups*, page 140.

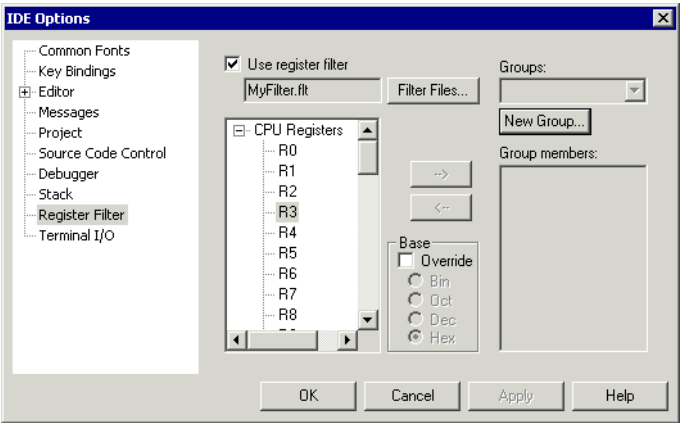


Figure 125: Register Filter options

The following options are available:

Option	Description
Use register filter	Enables the usage of register filters.
Filter Files	Displays a dialog box where you can select or create a new filter file.
Groups	Lists available groups in the register filter file, alternatively displays the new register group.
New Group	The name for the new register group.
Group members	Lists the registers selected from the register scroll bar window.
Base	Changes the default integer base.

Table 55: Register Filter options

TERMINAL I/O OPTIONS

Use the **Terminal I/O** options—available by choosing **Tools>Options** when the IAR C-SPY Debugger is running—to configure the C-SPY terminal I/O functionality.

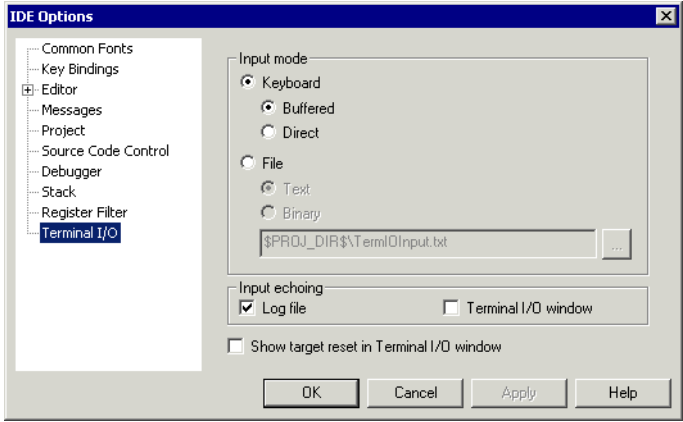


Figure 126: Terminal I/O options

Keyboard

Use the **Keyboard** option to make the input characters be read from the keyboard. Choose between:

- Buffered** Input characters are buffered.
- Direct** Input characters are not buffered.

File

Use the **File** option to make the input characters be read from a file. A browse button is available for locating the file. Choose between:

- Text** Input characters are read from a text file.
- Binary** Input characters are read from a binary file.

Input Echoing

Input characters can be echoed either in a log file, or in the C-SPY Terminal I/O window. To echo input in a file requires that you have enabled the option **Debug>Logging>Enable log file**.

Show target reset in Terminal I/O window

When the target resets, a message is displayed in the C-SPY Terminal I/O window.

CONFIGURE TOOLS DIALOG BOX

In the **Configure Tools** dialog box—available from the **Tools** menu—you can specify a user-defined tool to add to the Tools menu.

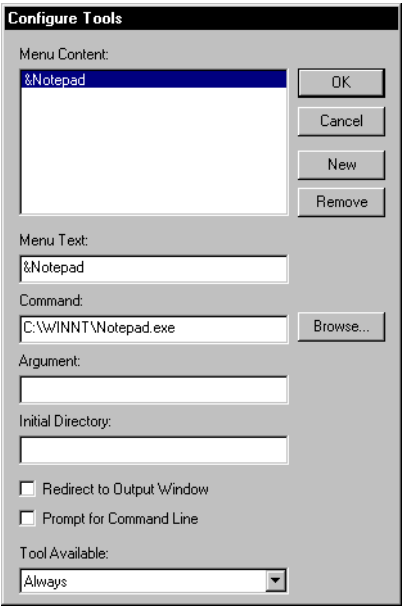


Figure 127: Configure Tools dialog box

Note: If you intend to add an external tool to the standard build tool chain, see *Extending the tool chain*, page 89.

The following options are available:

Option	Description
Menu Content	Lists all available user defined menu commands.
Menu Text	Specifies the text for the menu command. By adding the sign &, the following letter, N in this example, will then appear as the mnemonic key for this command. The text you type in this field will be reflected in the Menu Content field.

Table 56: Configure Tools dialog box options

Option	Description
Command	Specifies the command, and its path, to be run when you choose the command from the menu. A browse button is available for your convenience.
Argument	Optionally type an argument for the command.
Initial Directory	Specifies an initial working directory for the tool.
Redirect to Output window	Specifies any console output from the tool to the Tool Output page in the Messages window. Tools that are launched with this option cannot receive any user input, for instance input from the keyboard. Tools that <i>require</i> user input or make special assumptions regarding the console that they execute in, will <i>not</i> work at all if launched with this option.
Prompt for Command Line	Displays a prompt for the command line argument when the command is chosen from the Tools menu.
Tool Available	Specifies in which context the tool should be available, only when debugging or only when not debugging.

Table 56: Configure Tools dialog box options (Continued)

Note: Variables can be used in the arguments, allowing you to set up useful tools such as interfacing to a command line revision control system, or running an external tool on the selected file.

You can remove a command from the **Tools** menu by selecting it in this list and clicking **Remove**.

Click **OK** to confirm the changes you have made to the **Tools** menu.

The menu items you have specified will then be displayed on the **Tools** menu.




Figure 128: Customized Tools menu

Specifying command line commands or batch files

Command line commands or batch files need to be run from a command shell, so to add these to the **Tools** menu you need to specify an appropriate command shell in the **Command** text box. These are the command shells that can be entered as commands:

System	Command shell
Windows 2000/XP/Vista	cmd.exe (recommended) or command.com

Table 57: Command shells

FILENAME EXTENSIONS DIALOG BOX

In the **Filename Extensions** dialog box—available from the **Tools** menu—you can customize the filename extensions recognized by the build tools. This is useful if you have many source files that have a different filename extension.

If you have an IAR Embedded Workbench for a different microprocessor installed on your host computer, it can appear in the **Tool Chain** box. In that case you should select the tool chain you want to customize.




Figure 129: Filename Extensions dialog box

Note the * sign which indicates that there are user-defined overrides. If there is no * sign, factory settings are used.

Click **Edit** to open the **Filename Extension Overrides** dialog box.

FILENAME EXTENSION OVERRIDES DIALOG BOX

The **Filename Extension Overrides** dialog box—available by clicking **Edit** in the **Filename Extensions** dialog box—lists the available tools in the build chain, their factory settings for filename extensions, and any defined overrides.

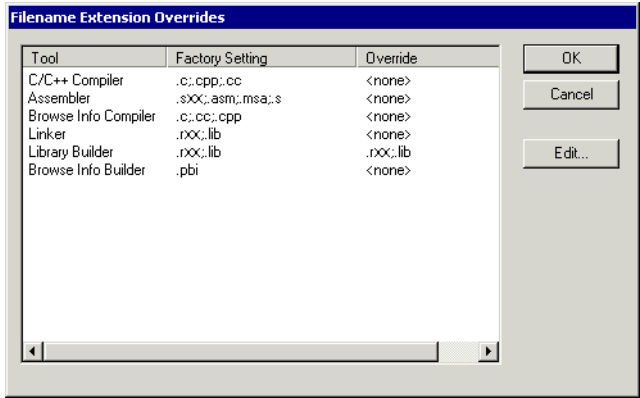


Figure 130: Filename Extension Overrides dialog box

Select the tool for which you want to define more recognized filename extensions, and click **Edit** to open the **Edit Filename Extensions** dialog box.

EDIT FILENAME EXTENSIONS DIALOG BOX

The **Edit File Extensions** dialog box—available by clicking **Edit** in the **Filename Extension Overrides** dialog box—lists the filename extensions accepted by default, and you can also define new filename extensions.




Figure 131: Edit Filename Extensions dialog box

Click **Override** and type the new filename extension you want to be recognized. Extensions can be separated by commas or semicolons, and should include the leading period.

CONFIGURE VIEWERS DIALOG BOX

The **Configure Viewers** dialog box—available from the **Tools** menu—lists the filename extensions of document formats that IAR Embedded Workbench can handle, and which viewer application that will be used for opening the document type. **Explorer Default** in the **Action** column means that the default application associated with the specified type in Windows Explorer is used for opening the document type.

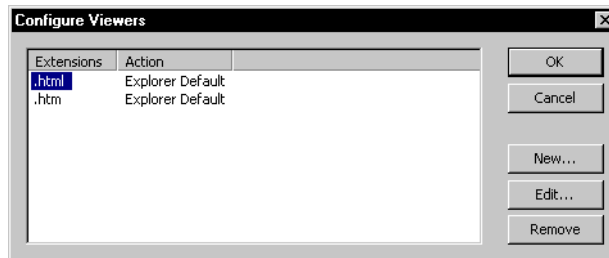


Figure 132: Configure Viewers dialog box

To specify how to open a new document type or editing the setting for an existing document type, click **New** or **Edit** to open the **Edit Viewer Extensions** dialog box.

EDIT VIEWER EXTENSIONS DIALOG BOX

Type the filename extension for the document type—including the separating period (.)—in the **Filename extensions** box.

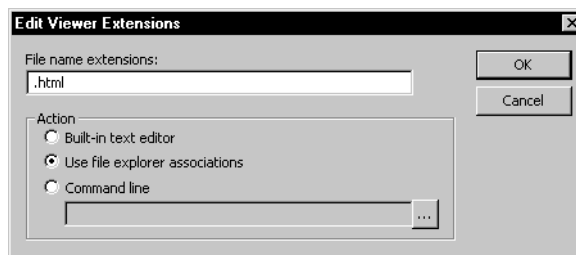


Figure 133: Edit Viewer Extensions dialog box

Then choose one of the **Action** options:

- **Built-in text editor**—select this option to open all documents of the specified type with the IAR Embedded Workbench text editor.
- **Use file explorer associations**—select this option to open all documents with the default application associated with the specified type in Windows Explorer.

- **Command line**—select this option and type or browse your way to the viewer application, and give any command line options you would like to the tool.

WINDOW MENU

Use the commands on the **Window** menu to manipulate the IAR Embedded Workbench IDE windows and change their arrangement on the screen.

The last section of the **Window** menu lists the windows currently open on the screen. Choose the window you want to switch to.




Figure 134: Window menu

The following commands are available on the Window menu:

Menu command		Description
Close Tab		Closes the active tab.
Close Window	CTRL+F4	Closes the active editor window.
Split		Splits an editor window horizontally or vertically into two, or four panes, to allow you to see more parts of a file simultaneously.
New Vertical Editor Window		Opens a new empty window next to current editor window.
New Horizontal Editor Window		Opens a new empty window under current editor window.
Move Tabs To Next Window		Moves all tabs in current window to next window.
Move Tabs To Previous Window		Moves all tabs in current window to previous window.
Close All Tabs Except Active		Closes all the tabs except the active tab.
Close All Editor Tabs		Closes all tabs currently available in editor windows.

Table 58: Window menu commands

HELP MENU

The **Help** menu provides help about the IAR Embedded Workbench IDE and displays the version numbers of the user interface and of the IAR Embedded Workbench IDE.

EMBEDDED WORKBENCH STARTUP DIALOG BOX

The **Embedded Workbench Startup** dialog box—available from the **Help** menu—provides easy access to ready-made example workspaces that can be built and executed *out of the box* for a smooth development startup.

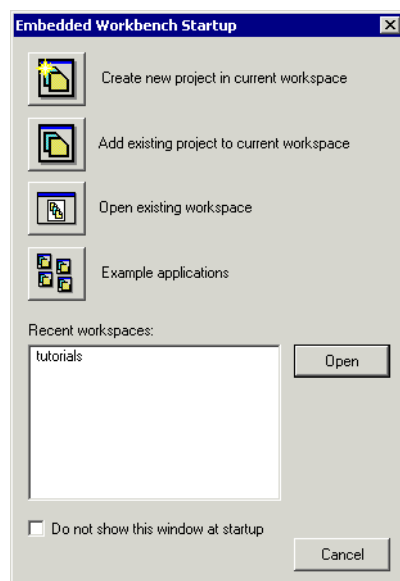


Figure 135: Embedded Workbench Startup dialog box

Create new project in current workspace

Use this option to create a new project in your current workspace.

Add existing project to current workspace

Use this option to add an existing project to your current workspace.

Open existing workspace

Use this option to open an existing workspace.

Note: Do not use this option to open an existing workspace which is part of your product installation, because that might overwrite the original files. Instead, use the option **Example applications**.

Example applications

Use this option to open the **Example Applications** dialog box. In this dialog box you can choose an example application which is part of your product installation. Click **Open** to first choose a destination directory for the project and then to open it. Select **Do not prompt for working copy directory** if you do not want to be prompted for a destination directory. In this case, the example application will be copied to the `My Documents\IAR Embedded Workbench\cpuname\Example Applications` directory.

Recent workspace

In the list of workspaces, choose a recently used workspace and click **Open** to open it. If this is the first time you open your IAR Embedded Workbench IDE, the list will be empty.

Do not show this window at startup

Use this option if you do not want the **Embedded Workbench Startup** dialog box to be automatically displayed when you start your IAR Embedded Workbench IDE.

C-SPY® Debugger reference

This chapter contains detailed reference information about the windows, menus, menu commands, and the corresponding components that are specific for the IAR C-SPY Debugger.

C-SPY windows

The following windows specific to C-SPY are available in the IAR C-SPY Debugger:

- IAR C-SPY Debugger main window
- Disassembly window
- Memory window
- Symbolic Memory window
- Register window
- Watch window
- Locals window
- Auto window
- Live Watch window
- Quick Watch window
- Statics window
- Call Stack window
- Terminal I/O window
- Code Coverage window
- Profiling window
- Stack window.

Additional windows will be available depending on which C-SPY driver you are using. For information about driver-specific windows, see the driver-specific documentation.

EDITING IN C-SPY WINDOWS

You can edit the contents of the Memory, Symbolic Memory, Register, Auto, Watch, Locals, Statics, Live Watch, and Quick Watch windows.

Use the following keyboard keys to edit the contents of these windows:

Key	Description
Enter	Makes an item editable and saves the new value.
Esc	Cancels a new value.

Table 59: Editing in C-SPY windows

IAR C-SPY DEBUGGER MAIN WINDOW

When you start the IAR C-SPY Debugger, the following debugger-specific items appear in the main IAR Embedded Workbench IDE window:

- A dedicated debug menu with commands for executing and debugging your application
- Depending on the C-SPY driver you are using, a driver-specific menu. Typically, this menu contains menu commands for opening driver-specific windows and dialog boxes. See the driver-specific documentation for more information
- A special debug toolbar
- Several windows and dialog boxes specific to C-SPY.

The window might look different depending on which components you are using.

Each window item is explained in greater detail in the following sections.

Menu bar

In addition to the menus available in the development environment, the **Debug** menu is available when C-SPY is running. The **Debug** menu provides commands for executing and debugging the source application. Most of the commands are also available as icon buttons in the debug toolbar.

Additional menus might be available, depending on which debugger drivers have been installed; for information, see the driver-specific documentation.

Debug toolbar

The debug toolbar provides buttons for the most frequently-used commands on the **Debug** menu.

You can display a description of any button by pointing to it with the mouse pointer. When a command is not available the corresponding button will be dimmed and you will not be able to select it.

The following diagram shows the command corresponding to each button:

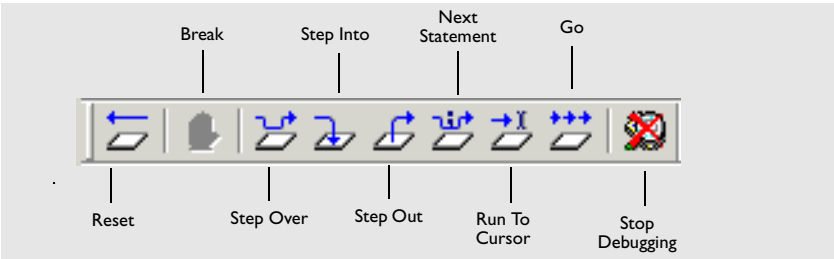


Figure 136: C-SPY debug toolbar

DISASSEMBLY WINDOW

The C-SPY Disassembly window—available from the **View** menu—shows the application being debugged as disassembled application code.

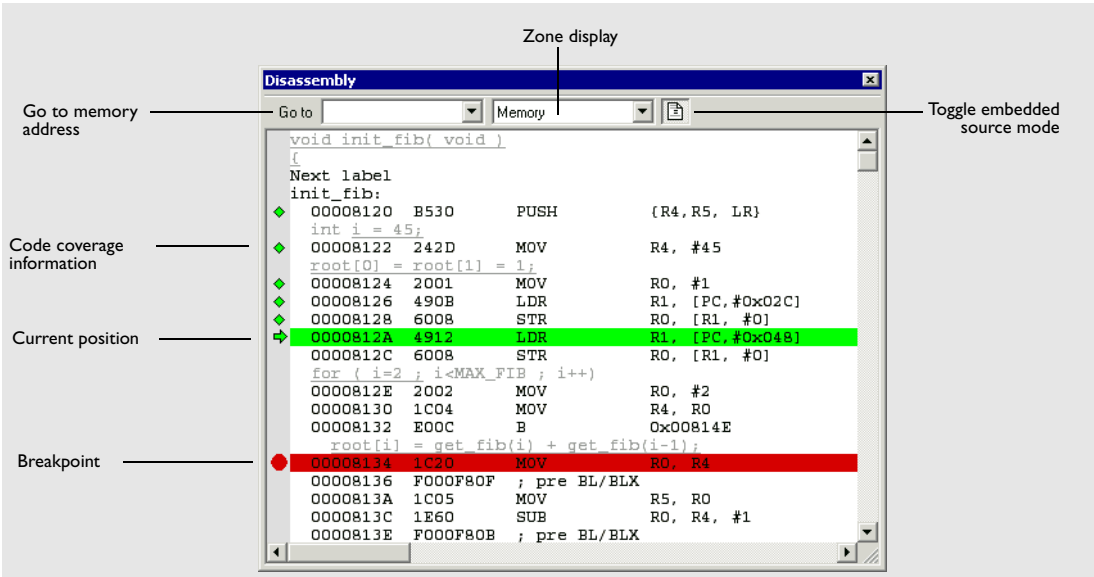


Figure 137: C-SPY Disassembly window

Toolbar

At the top of the window you can find a toolbar.

Operation	Description
Go to	The location you want to view. This can be a memory address, or the name of a variable, function, or label.
Zone display	Lists the available memory zones to display.
Toggle Mixed-Mode	Toggles between showing only disassembled code or disassembled code together with the corresponding source code. Source code requires that the corresponding source file has been compiled with debug information.

Table 60: Disassembly window toolbar

The display area

The current position—highlighted in green—indicates the next assembler instruction to be executed. You can move the cursor to any line in the Disassembly window by clicking on the line. Alternatively, you can move the cursor using the navigation keys. Double-click in the gray left-side margin of the window to set a breakpoint, which is indicated in red. Code that has been executed—code coverage—is indicated with a green diamond.

To change the default color of the source code in the Disassembly window, choose **Tools>Options>Debugger**. Set the default color using the **Set source code coloring in Disassembly window** option.



To view the corresponding assembler code for a function, you can select it in the editor window and drag it to the Disassembly window.

Disassembly context menu

Clicking the right mouse button in the Disassembly window displays a context menu which gives you access to some extra commands.




Figure 138: Disassembly window context menu

The following commands are available on the menu:

Menu command	Description
Move to PC	Displays code at the current program counter location.
Run to Cursor	Executes the application from the current position up to the line containing the cursor.
Code Coverage	Opens a submenu with commands for controlling code coverage.
Enable	Enable toggles code coverage on and off.
Show	Show toggles between displaying and hiding code coverage. Executed code is indicated by a green diamond.
Clear	Clear clears all code coverage information.
Toggle Breakpoint (Code)	Toggles a code breakpoint. Assembler instructions at which code breakpoints have been set are highlighted in red. For information about code breakpoints, see <i>Code breakpoints dialog box</i> , page 210.
Toggle Breakpoint (Log)	Toggles a log breakpoint for trace printouts. Assembler instructions at which log breakpoints have been set are highlighted in red. For information about log breakpoints, see <i>Log breakpoints dialog box</i> , page 212.
Enable/Disable Breakpoint	Enables and Disables a breakpoint.
Set Next Statement	Sets program counter to the location of the insertion point.
Copy Window Contents	Copies the selected contents of the Disassembly window to the clipboard.
Toggle Mixed-Mode	Toggles between showing only disassembled code or disassembled code together with the corresponding source code. Source code requires that the corresponding source file has been compiled with debug information.

Table 61: Disassembly context menu commands

MEMORY WINDOW

The Memory window—available from the **View** menu—gives an up-to-date display of a specified area of memory and allows you to edit it. You can open several instances of

this window, which is very convenient if you want to keep track of different memory or register zones, or monitor different parts of the memory.

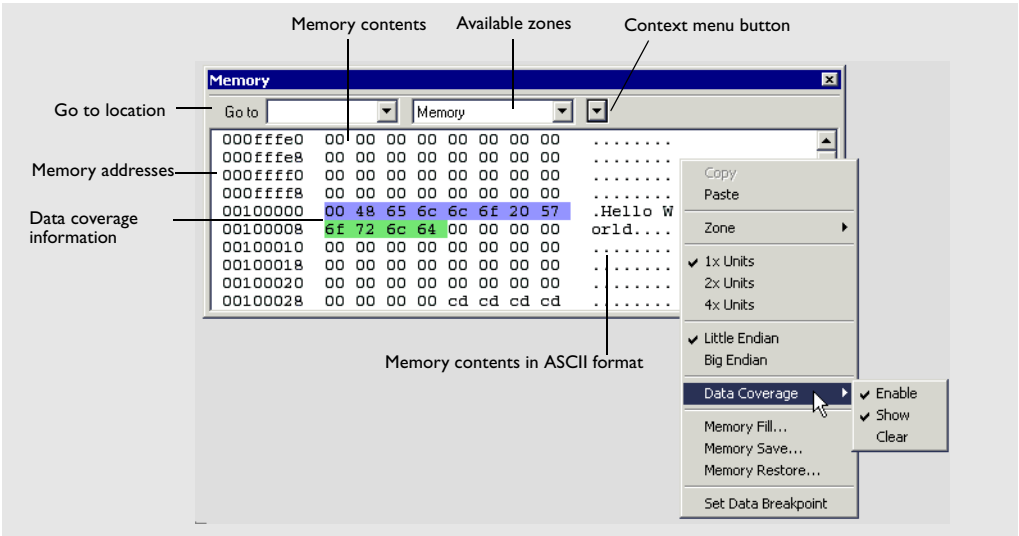


Figure 139: Memory window

Toolbar

At the top of the window you can find a toolbar:

Operation	Description
Go to	The location you want to view. This can be a memory address, or the name of a variable, function, or label.
Zone display	Lists the available memory zones to display.
Context-menu button	Displays the context menu, see <i>Memory window context menu</i> , page 275.

Table 62: Memory window operations

The display area

The display area shows the addresses currently being viewed, the memory contents in the format you have chosen, and the memory contents in ASCII format. You can edit the contents of the Memory window, both in the hexadecimal part and the ASCII part of the window.

Data coverage is displayed with the following colors:

- Yellow indicates data that has been read
- Blue indicates data that has been written
- Green indicates data that has been both read and written.

Note: Data coverage is not supported by all C-SPY drivers. Data coverage is supported by the IAR C-SPY Simulator.



To view the memory corresponding to a variable, you can select it in the editor window and drag it to the Memory window.

Memory window context menu

The following context menu is available in the Memory window:




Figure 140: Memory window context menu

The following commands are available on the menu:

Menu command	Description
Copy, Paste	Standard editing commands.
Zone	Lists the available memory zones to display.
x1, x2, x4 Units	Switches between displaying the memory contents in units of 8, 16, or 32 bits
Little Endian Big Endian	Switches between displaying the contents in big-endian or little-endian order.

Table 63: Commands on the memory window context menu

Menu command	Description
Data Coverage	
Enable	Enable toggles data coverage on and off.
Show	Show toggles between showing and hiding data coverage.
Clear	Clear clears all data coverage information.
Memory Fill	Displays the Fill dialog box, where you can fill a specified area with a value, see <i>Fill dialog box</i> , page 276.
Memory Save	Displays the Memory Save dialog box, where you can save the contents of a specified memory area to a file, see <i>Memory Save dialog box</i> , page 277.
Memory Restore	Displays the Memory Restore dialog box, where you can load the contents of a file in Intex-hex or Motorola s-record format to a specified memory zone, see <i>Memory Restore dialog box</i> , page 278.
Set Data Breakpoint	Sets breakpoints directly in the Memory window. The breakpoint is not highlighted; you can see, edit, and remove it in the Breakpoints dialog box. The breakpoints you set in this window will be triggered for both read and write access.

Table 63: Commands on the memory window context menu (Continued)

FILL DIALOG BOX

In the **Fill** dialog box—available from the context menu in the Memory window—you can fill a specified area of memory with a value.

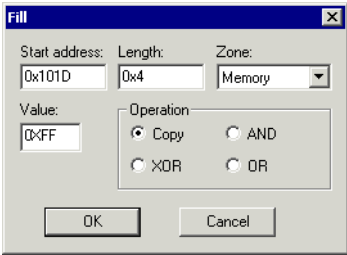


Figure 141: Fill dialog box

Options

Option	Description
Start Address	Type the start address—in binary, octal, decimal, or hexadecimal notation.

Table 64: Fill dialog box options

Option	Description
Length	Type the length—in binary, octal, decimal, or hexadecimal notation.
Zone	Select memory zone.
Value	Type the 8-bit value to be used for filling each memory location.

Table 64: Fill dialog box options (Continued)

These are the available memory fill operations:

Operation	Description
Copy	The Value will be copied to the specified memory area.
AND	An AND operation will be performed between the Value and the existing contents of memory before writing the result to memory.
XOR	An XOR operation will be performed between the Value and the existing contents of memory before writing the result to memory.
OR	An OR operation will be performed between the Value and the existing contents of memory before writing the result to memory.

Table 65: Memory fill operations

MEMORY SAVE DIALOG BOX

Use the **Memory Save** dialog box—available by choosing **Debug>Memory>Save** or from the context menu in the Memory window—to save the contents of a specified memory area to a file.

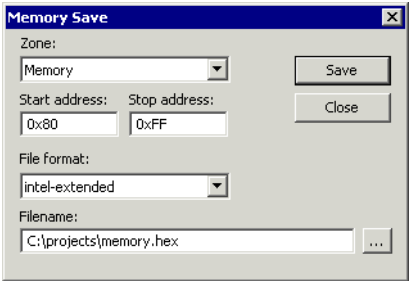


Figure 142: Memory Save dialog box

Zone

The available memory zones.

Start address

The start address of the memory range to be saved.

Stop address

The stop address of the memory range to be saved.

File format

The file format to be used, which is Intel-extended by default.

Filename

The destination file to be used; a browse button is available for your convenience.

Save

Saves the selected range of the memory zone to the specified file.

MEMORY RESTORE DIALOG BOX

Use the **Memory Restore** dialog box—available by choosing **Debug>Memory>Save** or from the context menu in the Memory window—to load the contents of a file in Intel-extended or Motorola S-record format to a specified memory zone.

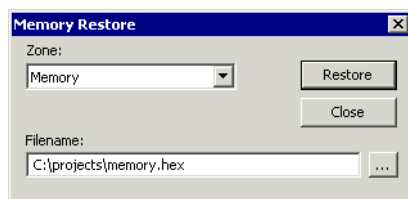


Figure 143: Memory Restore dialog box

Zone

The available memory zones.

Filename

The file to be read; a browse button is available for your convenience.

Restore

Loads the contents of the specified file to the selected memory zone.

SYMBOLIC MEMORY WINDOW

The Symbolic Memory window—available from the **View** menu when the IAR C-SPY Debugger is running—displays how variables with static storage duration, typically variables with file scope but also static variables in functions and classes, are laid out in memory. This can be useful for spotting alignment holes or for understanding problems caused by buffers being overwritten.

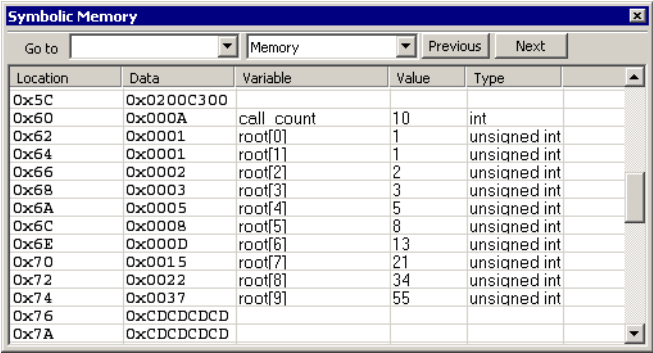


Figure 144: Symbolic Memory window

Toolbar

At the top of the window there is a toolbar:

Operation	Description
Go to	The memory location or symbol you want to view.
Zone display	Lists the available memory zones to display.
Previous	Jumps to the previous symbol.
Next	Jumps to the next symbol.

Table 66: Symbolic Memory window toolbar

The display area

The display area displays the memory space, where information is provided in the following columns:

Column	Description
Location	The memory address.

Table 67: Symbolic memory window columns

Column	Description
Data	The memory contents in hexadecimal format. The data is grouped according to the size of the symbol. This column is editable.
Variable	The variable name; requires that the variable has a fixed memory location. Local variables are not displayed.
Value	The value of the variable. This column is editable.
Type	The type of the variable.

Table 67: Symbolic memory window columns (Continued)

There are several different ways to navigate within the memory space:

- Text that is dropped in the window will be interpreted as symbols
- The scroll bar at the right-side of the window
- The toolbar buttons **Next** and **Previous**
- The toolbar list box **Go to** can be used for locating specific locations or symbols.

Note: Rows are marked in red when the corresponding value has changed.

Symbolic Memory window context menu

The following context menu is available in the Symbolic Memory window:




Figure 145: Symbolic Memory window context menu

The following commands are available on the context menu:

Menu command	Description
Next Symbol	Jumps to the next symbol.
Previous Symbol	Jumps to the previous symbol.
x1, x2, x4 Units	Switches between displaying the memory contents in units of 8, 16, or 32 bits. This applies only to rows which do not contain a variable.
Add to Watch Window	Adds the selected symbol to the Watch window.

Table 68: Commands on the Symbolic Memory window context menu

REGISTER WINDOW

The Register window—available from the **View** menu—gives an up-to-date display of the contents of the processor registers, and allows you to edit them. When a value changes it becomes highlighted. Some registers are expandable, which means that the register contains interesting bits or sub-groups of bits.

You can open several instances of this window, which is very convenient if you want to keep track of different register groups.

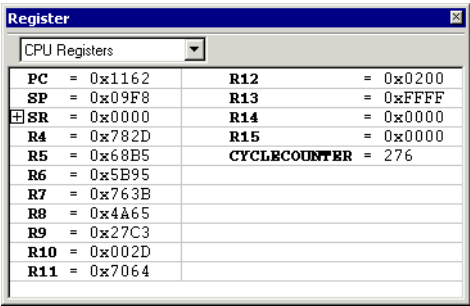


Figure 146: Register window

You can select which register group to display in the Register window using the drop-down list. To define application-specific register groups, see *Defining application-specific groups*, page 141.

WATCH WINDOW

The Watch window—available from the **View** menu—allows you to monitor the values of C-SPY expressions or variables. You can view, add, modify, and remove expressions

in the Watch window. Tree structures of arrays, structs, and unions are expandable, which means that you can study each item of these.

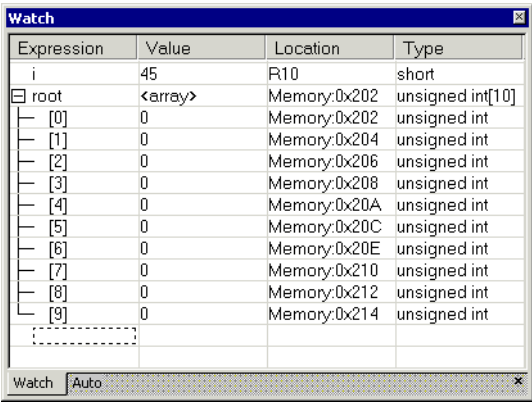


Figure 147: Watch window

Every time execution in C-SPY stops, a value that has changed since the last stop is highlighted. In fact, every time memory changes, the values in the Watch window are recomputed, including updating the red highlights.

Watch window context menu

The following context menu is available in the Watch window:




Figure 148: Watch window context menu

The menu contains the following commands:

Menu command	Description
Add, Remove	Adds or removes the selected expression.

Table 69: Watch window context menu commands

Menu command	Description
Default Format, Binary Format, Octal Format, Decimal Format, Hexadecimal Format, Char Format	Changes the display format of expressions. The display format setting affects different types of expressions in different ways, see Table 70, <i>Effects of display format setting on different types of expressions</i> . Your selection of display format is saved between debug sessions.
Show As	Provides a submenu with commands for changing the default type interpretation of variables. The commands on this submenu are mainly useful for assembler variables—data at assembler labels—as these are by default displayed as integers. For more information, see <i>Viewing assembler variables</i> , page 126.

Table 69: Watch window context menu commands (Continued)

The display format setting affects different types of expressions in different ways:

Type of expressions	Effects of display format setting
Variable	The display setting affects only the selected variable, not other variables.
Array element	The display setting affects the complete array, that is, same display format is used for each array element.
Structure field	All elements with the same definition—the same field name and C declaration type—are affected by the display setting.

Table 70: Effects of display format setting on different types of expressions

LOCALS WINDOW

The Locals window—available from the **View** menu—automatically displays the local variables and function parameters.

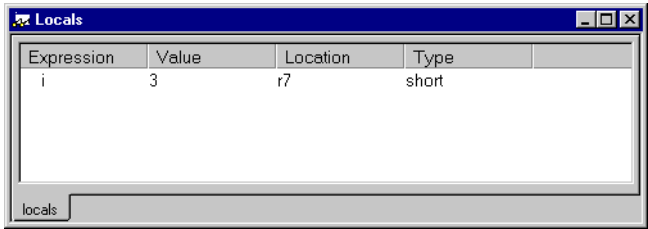



Figure 149: Locals window

Locals window context menu

The context menu available in the Locals window provides commands for changing the display format of expressions; for information about these commands, see *Watch window context menu*, page 282.

AUTO WINDOW

The Auto window—available from the **View** menu—automatically displays a useful selection of variables and expressions in, or near, the current statement.

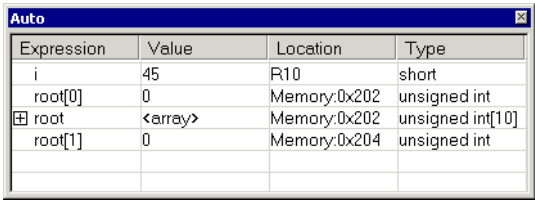

Expression	Value	Location	Type
i	45	R10	short
root[0]	0	Memory:0x202	unsigned int
root	<array>	Memory:0x202	unsigned int[10]
root[1]	0	Memory:0x204	unsigned int


Figure 150: Auto window

Auto window context menu

The context menu available in the Auto window provides commands for changing the display format of expressions; for information about these commands, see *Watch window context menu*, page 282.

LIVE WATCH WINDOW

The Live Watch window—available from the **View** menu—repeatedly samples and displays the value of expressions while your application is executing. Variables in the expressions must be statically located, such as global variables.

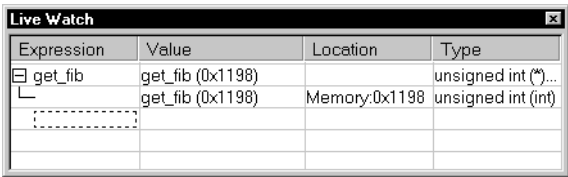

Expression	Value	Location	Type
get_fib	get_fib (0x1198)		unsigned int (*)...
get_fib	get_fib (0x1198)	Memory:0x1198	unsigned int (int)

Figure 151: Live Watch window

Typically, this window is useful for hardware target systems supporting this feature.

Live Watch window context menu

The context menu available in the Live Watch window provides commands for adding and removing expressions, changing the display format of expressions, as well as commands for changing the default type interpretation of variables. For information about these commands, see *Watch window context menu*, page 282.

In addition, the menu contains the **Options** command, which opens the **Debugger** dialog box where you can set the **Update interval** option. The default value of this option is 1000 milliseconds, which means the **Live Watch** window will be updated once every second during program execution.

QUICK WATCH WINDOW

In the Quick Watch window—available from the **View** menu—you can watch the value of a variable or expression and evaluate expressions.

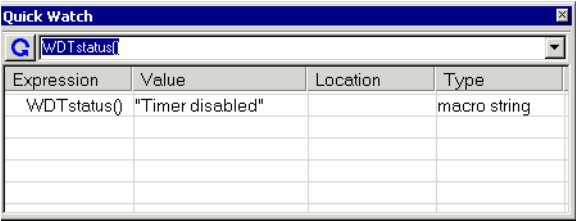


Figure 152: Quick Watch window



Type the expression you want to examine in the **Expressions** text box. Click the **Recalculate** button to calculate the value of the expression. For examples about how to use the Quick Watch window, see *Using the Quick Watch window*, page 125 and *Executing macros using Quick Watch*, page 148.

Quick Watch window context menu


The context menu available in the Quick Watch window provides commands for changing the display format of expressions, as well as commands for changing the default type interpretation of variables. For information about these commands, see *Watch window context menu*, page 282.

In addition, the menu contains the **Add to Watch window** command, which adds the selected expression to the Watch window.

STATICS WINDOW

The Statics window—available from the **View** menu—displays the values of variables with static storage duration, typically that is variables with file scope but also static

variables in functions and classes. Note that `volatile` declared variables with static storage duration will not be displayed.

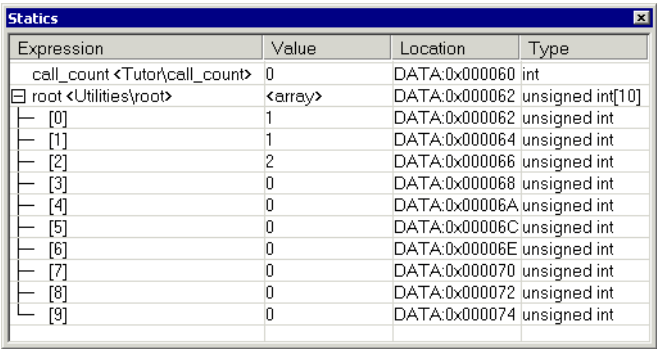

Expression	Value	Location	Type
call_count <Tutor\call_count>	0	DATA:0x000060	int
root <Utilities\root>	<array>	DATA:0x000062	unsigned int[10]
[0]	1	DATA:0x000062	unsigned int
[1]	1	DATA:0x000064	unsigned int
[2]	2	DATA:0x000066	unsigned int
[3]	0	DATA:0x000068	unsigned int
[4]	0	DATA:0x00006A	unsigned int
[5]	0	DATA:0x00006C	unsigned int
[6]	0	DATA:0x00006E	unsigned int
[7]	0	DATA:0x000070	unsigned int
[8]	0	DATA:0x000072	unsigned int
[9]	0	DATA:0x000074	unsigned int

Figure 153: Statics window

The display area


The display area shows the values of variables with static storage duration, where information is provided in the following columns:

Column	Description
Expression	The name of the variable. The base name of the variable is followed by the full name, which includes module, class, or function scope. This column is not editable.
Value	The value of the variable. Values that have changed are highlighted in red. This column is editable.
Location	The location in memory where this variable is stored.
Type	The data type of the variable.

Table 71: Symbolic memory window columns

Statics window context menu

The following context menu is available in the Statics window:



✓ Default Format
Binary Format
Octal Format
Decimal Format
Hexadecimal Format
Char Format
Select Statics...

Figure 154: Statics window context menu

The menu contains the following commands:

Menu command	Description
Default Format, Binary Format, Octal Format, Decimal Format, Hexadecimal Format, Char Format	Changes the display format of expressions. The display format setting affects different types of expressions in different ways, see Table 70, <i>Effects of display format setting on different types of expressions</i> . Your selection of display format is saved between debug sessions.
Select Statics	Displays a dialog box where you can select a subset of variables to be displayed in the Statics window, see <i>Select Statics dialog box</i> , page 287.

Table 72: Statics window context menu commands

SELECT STATICS DIALOG BOX

Use the **Select Statics** dialog box—available from the context menu in the Statics window—to select which variables should be displayed in the Statics window.

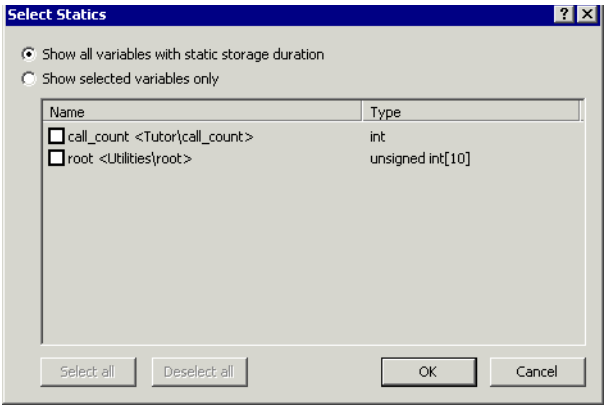


Figure 155: Select Statics dialog box

Show all variables with static storage duration

Use this option to make all variables be displayed in the Statics window, including new variables that are added to your application between debug sessions.

Show selected variables only

Use this option to select which variables you want to be displayed in the Statics window. Note that in this case if you add a new variable to your application between two debug

sessions, this variable will not automatically be displayed in the Statics window. If the checkbox next to a variable is selected, the variable will be displayed.

CALL STACK WINDOW

The Call stack window—available from the **View** menu—displays the C function call stack with the current function at the top. To inspect a function call, double-click it. C-SPY now focuses on that call frame instead.

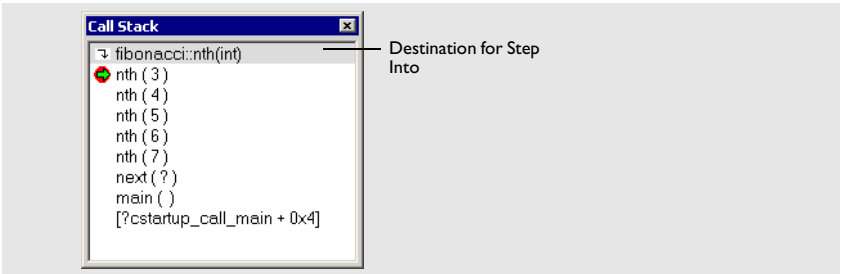


Figure 156: Call Stack window

Each entry has the format:

function(values)

where *(values)* is a list of the current value of the parameters, or empty if the function does not take any parameters.

If the **Step Into** command steps into a function call, the name of the function is displayed in the grey bar at the top of the window. This is especially useful for implicit function calls, such as C++ constructors, destructors, and operators.

Call Stack window context menu

The context menu available by right-clicking in the Call Stack window provides the following commands:




Figure 157: Call Stack window context menu

Commands

Go to Source	Displays the selected functions in the Disassembly or editor windows.
Show Arguments	Shows function arguments.
Run to Cursor	Executes to the function selected in the call stack.
Toggle Breakpoint (Code)	Toggles a code breakpoint.
Toggle Breakpoint (Log)	Toggles a log breakpoint.
Enable/Disable Breakpoint	Enables or disables the selected breakpoint.

TERMINAL I/O WINDOW

In the Terminal I/O window—available from the **View** menu—you can enter input to the application, and display output from it. To use this window, you need to link the application with the option **Debug info with terminal I/O**. C-SPY will then direct `stdin`, `stdout` and `stderr` to this window. If the Terminal I/O window is closed, C-SPY will open it automatically when input is required, but not for output.

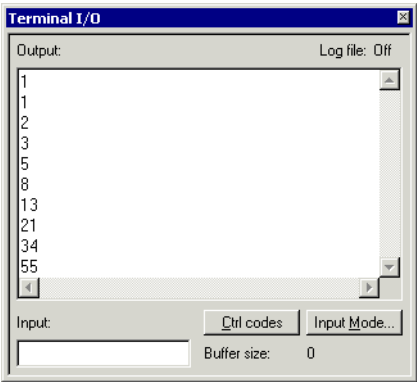


Figure 158: Terminal I/O window

Clicking the **Ctrl codes** button opens a menu with submenus for input of special characters, such as EOF (end of file) and NUL.




Figure 159: Ctrl codes menu

Clicking the **Input Mode** button opens the **Input Mode** dialog box where you choose whether to input data from the keyboard or from a file.

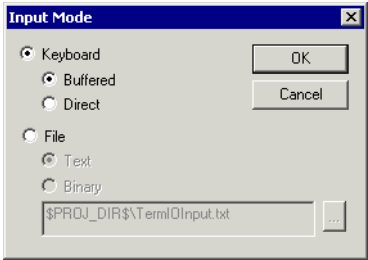


Figure 160: Input Mode dialog box

For reference information about the options available in the dialog box, see *Terminal I/O options*, page 260.

CODE COVERAGE WINDOW

The Code Coverage window—available from the **View** menu—reports the status of the current code coverage analysis, that is, what parts of the code that have been executed at least once since the start of the analysis. The compiler generates detailed stepping information in the form of *step points* at each statement, as well as at each function call. The report includes information about all modules and functions. It reports the amount of all step points, in percentage, that have been executed and lists all step points that have not been executed up to the point where the application has been stopped. The coverage will continue until turned off.

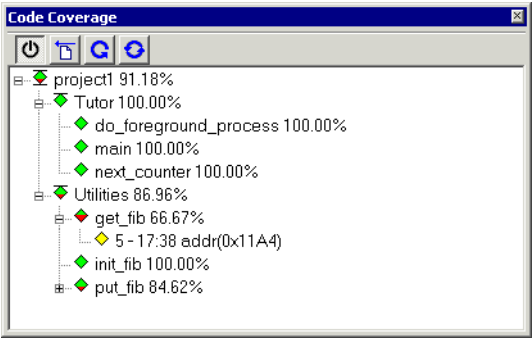


Figure 161: Code Coverage window

Note: You can enable the Code Coverage plugin module on the **Debugger>Plugins** page available in the **Options** dialog box.

Code coverage is not supported by all C-SPY drivers. For information about whether the C-SPY driver you are using supports code coverage, see the driver-specific documentation in the online help system available from the **Help** menu Code coverage is supported by the C-SPY Simulator.

Code coverage commands

In addition to the commands available as icon buttons in the toolbar, clicking the right mouse button in the Code Coverage window displays a context menu that gives you access to these and some extra commands.








Figure 162: Code coverage context menu

You can find the following commands on the menu:

	Activate	Switches code coverage on and off during execution.
	Clear	Clears the code coverage information. All step points are marked as not executed.
	Refresh	Updates the code coverage information and refreshes the window. All step points that has been executed since the last refresh are removed from the tree.
	Auto-refresh	Toggles the automatic reload of code coverage information on and off. When turned on, the code coverage information is reloaded automatically when C-SPY stops at a breakpoint, at a step point, and at program exit.
	Save As	Saves the current code coverage information in a text file.

The following icons are used to give you an overview of the current status on all levels:

- A red diamond signifies that 0% of the code has been executed
- A green diamond signifies that 100% of the code has been executed
- A red and green diamond signifies that some of the code has been executed
- A yellow diamond signifies a step point that has not been executed.


For step point lines, the information displayed is the column number range and the row number of the step point in the source window, followed by the address of the step point.

<column start>-<column end>:<row>.

PROFILING WINDOW

The Profiling window—available from the **View** menu—displays profiling information, that is, timing information for the functions in an application. Profiling must be turned on explicitly using a button in the window’s toolbar, and will stay active until it is turned off.

The profiler measures time at the entry and return of a function. This means that time consumed in a function is not added until the function returns or another function is called. You will only notice this if you are stepping into a function.

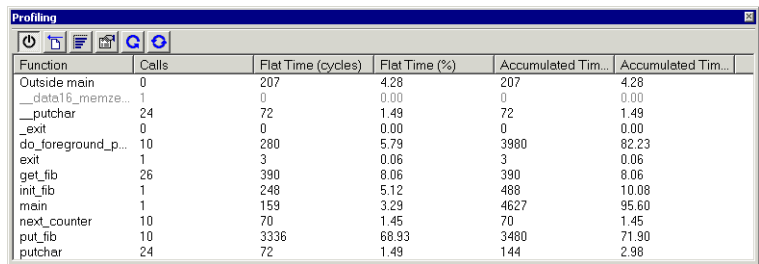

Function	Calls	Flat Time (cycles)	Flat Time (%)	Accumulated Tim...	Accumulated Tim...
Outside main	0	207	4.28	207	4.28
__data16_memze...	1	0	0.00	0	0.00
__putchar	24	72	1.49	72	1.49
_exit	0	0	0.00	0	0.00
do_foreground_p...	10	280	5.79	3980	82.23
exit	1	3	0.06	3	0.06
get_fib	26	390	8.06	390	8.06
init_fib	1	248	5.12	488	10.08
main	1	159	3.29	4627	95.60
next_counter	10	70	1.45	70	1.45
put_fib	10	3336	68.93	3480	71.90
putchar	24	72	1.49	144	2.98

Figure 163: Profiling window

Note: You can enable the Profiling plugin module on the **Debugger>Plugins** page available in the **Options** dialog box.

Profiling is not supported by all C-SPY drivers. For information about whether the C-SPY driver you are using supports profiling, see the driver-specific documentation in the online help system available from the **Help** menu. Profiling is supported by the C-SPY Simulator.

Profiling commands

In addition to the toolbar buttons, the context menu available in the Profiling window gives you access to these and some extra commands:








- 
- ✓ Activate
 - New Measurement
 - ✓ Graph
 - Show details
 - Refresh
 - Auto refresh
 - Save As...

Figure 164: Profiling context menu

You can find the following commands on the menu:

	Activate	Toggles profiling on and off during execution.
	New measurement	Starts a new measurement. By clicking the button, the values displayed are reset to zero.
	Graph	Displays the percentage information for Flat Time and Accumulated Time as graphs (bar charts) or numbers.
	Show details	Shows more detailed information about the function selected in the list. A window is opened showing information about callers and callees for the selected function.
	Refresh	Updates the profiling information and refreshes the window.
	Auto refresh	Toggles the automatic update of profiling information on and off. When turned on, the profiling information is updated automatically when C-SPY stops at a breakpoint, at a step point, and at program exit.
	Save As	Saves the current profiling information in a text file.

Profiling columns

The Profiling window contains the following columns:

Column	Description
Function	The name of each function.
Calls	The number of times each function has been called.
Flat Time	The total time spent in each function in cycles or as a percentage of the total number of cycles, excluding all function calls made from that function.
Accumulated Time	Time spent in each function in cycles or as a percentage of the total number of cycles, including all function calls made from that function.

Table 73: Profiling window columns

There is always an item in the list called **Outside main**. This is time that cannot be placed in any of the functions in the list. That is, code compiled without debug information, for instance, all startup and exit code, and C/C++ library code.

STACK WINDOW

The Stack window is a memory window that displays the contents of the stack. In addition, some integrity checks of the stack can be performed to detect and warn about problems with stack overflow. For example, the Stack window is useful for determining the optimal size of the stack.

Before you can open the Stack window you must make sure it is enabled: choose **Project>Options>Debugger>Plugins** and select **Stack** from the list of plugins. In C-SPY, you can then open a Stack window by choosing **View>Stack**. You can open several Stack windows, each showing a different stack—if several stacks are available—or the same stack with different display settings.

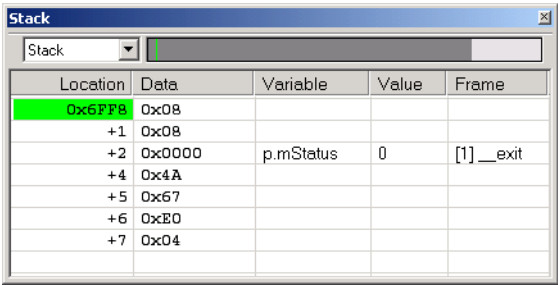


Figure 165: Stack window

The stack drop-down menu

If the microcontroller you are using has multiple stacks, you can use the stack drop-down menu at the top of the window to select which stack to view.

The graphical stack bar

At the top of the window, a stack bar displays the state of the stack graphically. To view the stack bar you must make sure it is enabled: choose **Tools>Options>Stack** and select the option **Enable graphical stack display and stack usage tracking**.

The left end of the stack bar represents the bottom of the stack, in other words, the position of the stack pointer when the stack is empty. The right end represents the end of the memory space reserved for the stack. A green line represents the current value of the stack pointer. The part of the stack memory that has been used during execution is displayed in a dark gray color, and the unused part in a light gray color. The graphical stack bar turns red when the stack usage exceeds a threshold that you can specify.

When your application is first loaded, and upon each reset, the memory for the stack area is filled with the dedicated byte value 0xCD before the application starts executing. Whenever execution stops, the stack memory is searched from the end of the stack until a byte with a value different from 0xCD is found, which is assumed to be how far the stack has been used. Although this is a reasonably reliable way to track stack usage, there is no guarantee that a stack overflow is detected. For example, a stack *can* incorrectly grow outside its bounds, and even modify memory outside the stack range, without actually modifying any of the bytes near the stack range. Likewise, your application might modify memory within the stack range by mistake. Furthermore, the

Stack window cannot detect a stack overflow when it happens, but can only detect the signs it leaves behind.

Note: The size and location of the stack is retrieved from the definition of the segment holding the stack, typically `CSTACK`, made in the linker command file. If you, for some reason, modify the stack initialization made in the system startup code, `cstartup`, you should also change the segment definition in the linker command file accordingly; otherwise the Stack window cannot track the stack usage. To read more about this, see the *IAR C/C++ Compiler Reference Guide*.

When the stack bar is enabled, the functionality needed to detect and warn about stack overflows is also enabled, see *Stack options*, page 257.

The Stack window columns

The main part of the window displays the contents of stack memory in the following columns:

Column	Description
Location	Displays the location in memory. The addresses are displayed in increasing order. If your target system has a stack that grows towards high addresses, the top of the stack will consequently be located at the bottom of the window. The address referenced by the stack pointer, in other words the top of the stack, is highlighted in a green color.
Data	Displays the contents of the memory unit at the given location. From the Stack window context menu, you can select how the data should be displayed; as a 1-, 2-, or 4-byte group of data.
Variable	Displays the name of a variable, if there is a local variable at the given location. Variables are only displayed if they are declared locally in a function, and located on the stack and not in registers.
Value	Displays the value of the variable that is displayed in the Variable column.
Frame	Displays the name of the function the call frame corresponds to.

Table 74: Stack window columns

The Stack window context menu

The following context menu is available if you right-click in the Stack window:



Figure 166: Stack window context menu

The following commands are available in the context window:

Show variables	Separate columns named Variables , Value , and Frame are displayed in the Stack window. Variables located at memory addresses listed in the Stack window are displayed in these columns.
Show offsets	When this option is selected, locations in the Location column are displayed as offsets from the stack pointer. When deselected, locations are displayed as absolute addresses.
1x Units	The data in the Data column is displayed as single bytes.
2x Units	The data in the Data column is displayed as 2-byte groups.
4x Units	The data in the Data column is displayed as 4-byte groups.
Options	Opens the IDE Options dialog box where you can set options specific to the Stack window, see <i>Stack options</i> , page 257.

C-SPY menus

In addition to the menus available in the development environment, the **Debug** menu is available when C-SPY is running.

Additional menus will be available depending on which C-SPY driver you are using. For information about driver-specific menus, see the online help system available from the **Help** menu for information about driver-specific documentation.

DEBUG MENU

The **Debug** menu provides commands for executing and debugging your application. Most of the commands are also available as toolbar buttons.



Figure 167: Debug menu










Menu Command			Description
	Go	F5	Executes from the current statement or instruction until a breakpoint or program exit is reached.
	Break		Stops the application execution.
	Reset		Resets the target processor.
	Stop Debugging	Ctrl+Shift+D	Stops the debugging session and returns you to the project manager.
	Step Over	F10	Executes the next statement, function call, or instruction, without entering C or C++ functions or assembler subroutines.
	Step Into	F11	Executes the next statement or instruction, entering C or C++ functions or assembler subroutines.
	Step Out	Shift+F11	Executes from the current statement up to the statement after the call to the current function.
	Next Statement		Executes directly to the next statement without stopping at individual function calls.
	Run to Cursor		Executes from the current statement or instruction up to a selected statement or instruction.

Table 75: Debug menu commands

Menu Command	Description
Autostep	Displays the Autostep settings dialog box which lets you customize and perform autostepping.
Set Next Statement	Moves the program counter directly to where the cursor is, without executing any source code. Note, however, that this creates an anomaly in the program flow and might have unexpected effects.
Memory>Save	Displays the Memory Save dialog box, where you can save the contents of a specified memory area to a file, see <i>Memory Save dialog box</i> , page 277.
Memory>Restore	Displays the Memory Restore dialog box, where you can load the contents of a file in Intex-extended or Motorola s-record format to a specified memory zone, see <i>Memory Restore dialog box</i> , page 278.
Refresh	Refreshes the contents of all debugger windows. Because window updates are automatic, this is needed only in unusual situations, such as when target memory is modified in ways C-SPY cannot detect. It is also useful if code that is displayed in the Disassembly window is changed.
Macros	Displays the Macro Configuration dialog box to allow you to list, register, and edit your macro files and functions.
Logging>Set Log file	Displays a dialog box to allow you to log input and output from C-SPY to a file. You can select the type and the location of the log file. You can choose what you want to log: errors, warnings, system information, user messages, or all of these.
Logging>Set Terminal I/O Log file	Displays a dialog box to allow you to log terminal input and output from C-SPY to a file. You can select the destination of the log file.

Table 75: Debug menu commands (Continued)

Autostep settings dialog box

In the **Autostep settings** dialog box—available from the **Debug** menu—you can customize autostepping.




Figure 168: Autostep settings dialog box

The drop-down menu lists the available step commands.

The **Delay** text box lets you specify the delay between each step.

Macro Configuration dialog box

In the **Macro Configuration** dialog box—available by choosing **Debug>Macros**—you can list, register, and edit your macro files and functions.

Macro functions that have been registered using the dialog box will be deactivated when you exit the debug session, and will not automatically be registered at the next debug session.

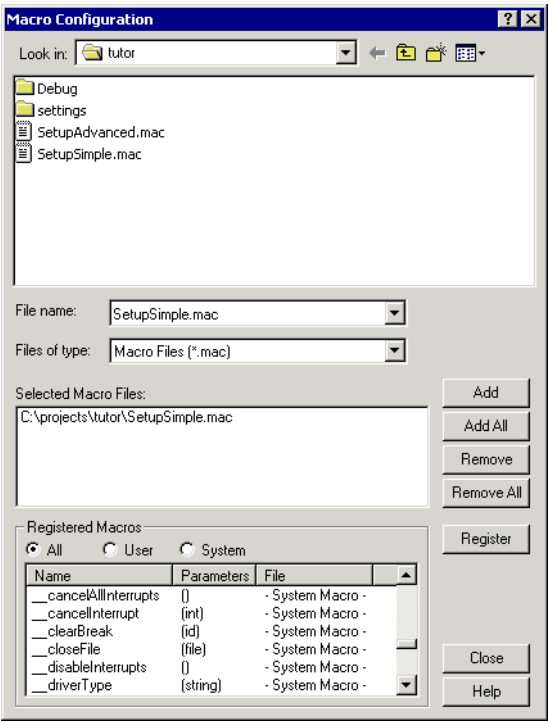


Figure 169: Macro Configuration dialog box

Registering macro files

Select the macro files you want to register in the file selection list, and click **Add** or **Add All** to add them to the **Selected Macro Files** list. Conversely, you can remove files from the **Selected Macro Files** list using **Remove** or **Remove All**.

Once you have selected the macro files you want to use click **Register** to register them, replacing any previously defined macro functions or variables. Registered macro functions are displayed in the scroll window under **Registered Macros**. Note that system macros cannot be removed from the list, they are always registered.

Listing macro functions

Selecting **All** displays all macro functions, selecting **User** displays all user-defined macros, and selecting **System** displays all system macros.

Clicking on either **Name** or **File** under **Registered Macros** displays the column contents sorted by macro names or by file. Clicking a second time sorts the contents in the reverse order.

Modifying macro files

Double-clicking a user-defined macro function in the **Name** column automatically opens the file in which the function is defined, allowing you to modify it, if needed.

Log File dialog box

The **Log File** dialog box—available by choosing **Debug>Logging>Set Log File**—allows you to log output from C-SPY to a file.

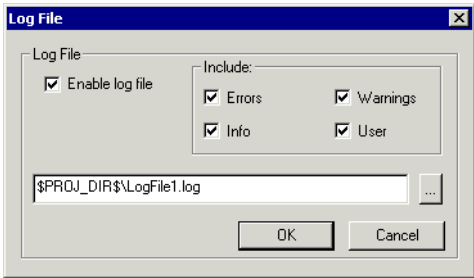


Figure 170: Log File dialog box

Enable or disable logging to the file with the **Enable Log file** check box.

The information printed in the file is by default the same as the information listed in the Log window. To change the information logged, use the **Include** options:

Option	Description
Errors	C-SPY has failed to perform an operation.
Warnings	A suspected error.

Table 76: Log file options

Option	Description
Info	Progress information about actions C-SPY has performed.
User	Printouts from C-SPY macros, that is, your printouts using the __message statement.

Table 76: Log file options (Continued)

Click the browse button, to override the default file type and location of the log file. Click **Save** to select the specified file—the default filename extension is log.

Terminal I/O Log File dialog box

The **Terminal I/O Log Files** dialog box—available by choosing **Debug>Logging**—allows you to select a destination log file, and to log terminal I/O input and output from C-SPY to this file.

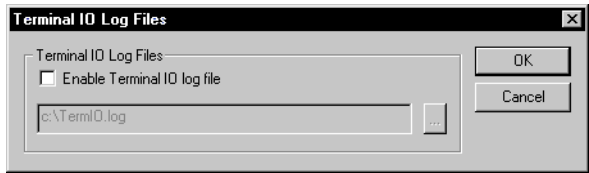


Figure 171: Terminal I/O Log File dialog box

Click the browse button to open a standard **Save As** dialog box. Click **Save** to select the specified file—the default filename extension is log.

General options

This chapter describes the general options in the IAR Embedded Workbench® IDE.

For information about how options can be set, see *Setting options*, page 85.

Target

For information about the **Target** options, see the online help system available from the **Help** menu.

Output

With the **Output** options you can specify the type of output file—**Executable** or **Library**. You can also specify the destination directories for executable files, object files, and list files.

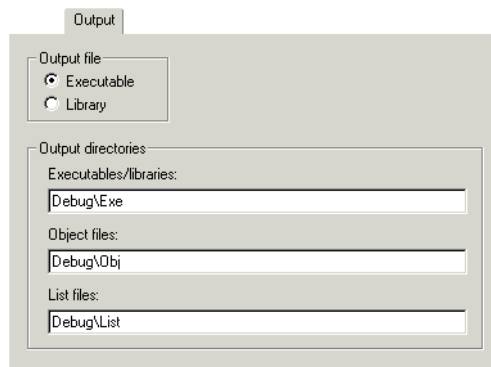


Figure 172: Output options

OUTPUT FILE

Use these options to choose the type of output file. Choose between:

- | | |
|--------------------------------|--|
| Executable
(default) | As a result of the build process, the linker will create an <i>application</i> (an executable output file). When this option is selected, linker options will be available in the Options dialog box. Before you create the output you should set the appropriate linker options. |
| Library | As a result of the build process, the library builder will create a <i>library file</i> . When this option is selected, library builder options will be available in the Options dialog box, and Linker will disappear from the list of categories. Before you create the library you can set the options. |

OUTPUT DIRECTORIES

Use these options to specify paths to destination directories. Note that incomplete paths are relative to your project directory. You can specify the paths to the following destination directories:

- | | |
|------------------------------|--|
| Executables/libraries | Use this option to override the default directory for executable or library files. Type the name of the directory where you want to save executable files for the project. |
| Object files | Use this option to override the default directory for object files. Type the name of the directory where you want to save object files for the project. |
| List files | Use this option to override the default directory for list files. Type the name of the directory where you want to save list files for the project. |

Library Configuration

With the **Library Configuration** options you can specify which library to use.

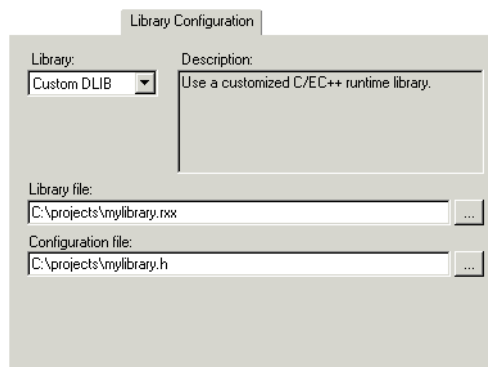


Figure 173: Library Configuration options

For information about the runtime library, library configurations, the runtime environment they provide, and the possible customizations, see *IAR C/C++ Compiler Reference Guide*.

LIBRARY

In the **Library** drop-down list you choose which runtime library to use. For information about available libraries, see the *IAR C/C++ Compiler Reference Guide*.

The library object file and library configuration file that actually will be used are displayed in the **Library file** and **Configuration file** text boxes, respectively.

LIBRARY FILE

The **Library file** text box displays the library object file that will be used. A library object file is automatically chosen depending on some of your settings, see the *IAR C/C++ Compiler Reference Guide*.

If you have chosen **Custom** library in the **Library** drop-down list, you must specify your own library object file.

CONFIGURATION FILE

The **Configuration file** text box displays the library configuration file that will be used. A library configuration file is chosen automatically depending on the project settings. If you have chosen **Custom DLIB** in the **Library** drop-down list, you must specify your own library configuration file.

Note: A library configuration file is only required for the DLIB library, but note that not all product versions support the DLIB library.

Library Options

With the options on the **Library Options** page you can choose `printf` and `scanf` formatters.

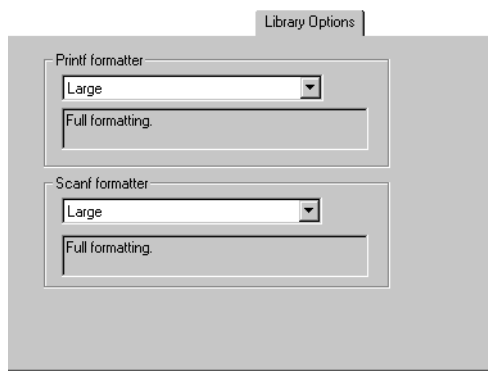


Figure 174: Library Options page

See the *IAR C/C++ Compiler Reference Guide* for more information about the formatting capabilities.

PRINTF FORMATTER

The full formatter version is memory-consuming, and provides facilities that are not required in many embedded applications.

For information about available `printf` formatters, see the *IAR C/C++ Compiler Reference Guide*.

SCANF FORMATTER

The full formatter version is memory-consuming, and provides facilities that are not required in many embedded applications.

For information about available `scanf` formatters, see the *IAR C/C++ Compiler Reference Guide*.

Stack/Heap

With the options on the **Stack/Heap** page you can customize the heap and stack sizes. For more information, see the online help system available from the **Help** menu.

Compiler options

This chapter describes the compiler options available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

Multi-file compilation

Before you set specific compiler options, you can decide if you want to use multi-file compilation, which is an optimization technique. If the compiler is allowed to compile multiple source files in one invocation, it can in many cases optimize more efficiently.

You can use this option for the entire project or for individual groups of files. All C/C++ source files in such a group will be compiled together using one invocation of the compiler.

Select **Multi-file Compilation** to enable multi-file compilation for the group of project files that was selected in the workspace window when you opened the **Options** dialog box. Use **Discard Unused Publics** to discard any unused public functions and variables from the compilation unit. For more information about multi-file compilation and discarding unused public functions, see the *IAR C/C++ Compiler Reference Guide*.



Figure 175: Multi-file Compilation

If you use this option, all files included in the selected group will be compiled together using the compiler options which have been set on the group or nearest higher enclosing group which has any options set. Any overriding compiler options on one or more files are ignored when building, because a group compilation must use exactly one set of options.

For information about how multi-file compilation is displayed in the workspace window, see *Workspace window*, page 194.

Note: If your product version does not support multi-file compilation, the **Multi-file Compilation** option is not available.

Language

The **Language** options enable the use of target-dependent extensions to the C or C++ language.

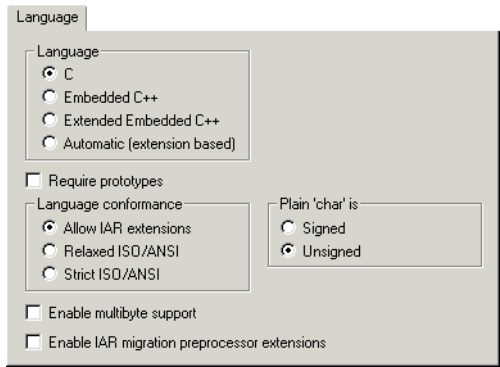


Figure 176: Compiler language options

LANGUAGE

With the **Language** options you can specify the language support you need.

For information about Embedded C++ and Extended Embedded C++, see the *IAR C/C++ Compiler Reference Guide*. (Note that not all product versions support C++.)

C

By default, the IAR C/C++ Compiler runs in ISO/ANSI C mode, in which features specific to Embedded C++ and Extended Embedded C++ cannot be utilized.

Embedded C++

In Embedded C++ mode, the compiler treats the source code as Embedded C++. This means that features specific to Embedded C++, such as classes and overloading, can be utilized.

Embedded C++ requires that a DLIB library (C/C++ library) is used.

Extended Embedded C++

In Extended Embedded C++ mode, you can take advantage of features like namespaces or the standard template library in your source code.

Extended Embedded C++ requires that a DLIB library (C/C++ library) is used.

Automatic

If you select **Automatic**, language support will be decided automatically depending on the filename extension of the file being compiled:

- Files with the filename extension `c` will be compiled as C source files
- Files with the filename extension `cpp` will be compiled as Extended Embedded C++ source files.

This option requires that a DLIB library (C/C++ library) is used.

Note: Not all product versions support C++. For products without C++ support, the **Language** options will not be available.

REQUIRE PROTOTYPES

This option forces the compiler to verify that all functions have proper prototypes. Using this option means that code containing any of the following will generate an error:

- A function call of a function with no declaration, or with a Kernighan & Ritchie C declaration
- A function definition of a public function with no previous prototype declaration
- An indirect function call through a function pointer with a type that does not include a prototype.

LANGUAGE CONFORMANCE

Language extensions must be enabled for the IAR C/C++ Compiler to be able to accept target-specific keywords as extensions to the standard C or C++ language. In the IAR Embedded Workbench IDE, the option **Allow IAR extensions** is enabled by default.

The option **Relaxed ISO/ANSI** disables IAR extensions, but does not adhere to strict ISO/ANSI.

Select the option **Strict ISO/ANSI** to adhere to the strict ISO/ANSI C standard.

For details about language extensions, see the *IAR C/C++ Compiler Reference Guide*.

PLAIN 'CHAR' IS

Normally, the compiler interprets the `char` type as unsigned `char`. Use this option to make the compiler interpret the `char` type as signed `char` instead, for example for compatibility with another compiler.

Note: The runtime library is compiled with unsigned plain characters. If you select the **Signed** option, you might get type mismatch warnings from the linker as the library uses unsigned `char`.

ENABLE MULTIBYTE SUPPORT

By default, multibyte characters cannot be used in C or Embedded C++ source code. If you use this option, multibyte characters in the source code are interpreted according to the host computer's default setting for multibyte support.

Multibyte characters are allowed in C and C++ style comments, in string literals, and in character constants. They are transferred untouched to the generated code.

ENABLE IAR MIGRATION PREPROCESSOR EXTENSIONS

Migration preprocessor extensions extend the preprocessor in order to ease migration of code from earlier IAR compilers. If you need to migrate code from an earlier IAR C or C++ compiler, you may want to use this option. Note that, depending on your product installation, this option might not be available.

Note: If you use this option, not only will the compiler accept code that is not standard conformant, but it will also reject some code that *does* conform to standard.

Important! Do not depend on these extensions in newly written code. Support for them may be removed in future compiler versions.

Code

With the options on the **Code** page you can customize the code generation. For more information, see the online help system available from the **Help** menu. Note that, depending on your product installation, this page might not be available.

Optimizations

The **Optimizations** options determine the type and level of optimization for generation of object code.

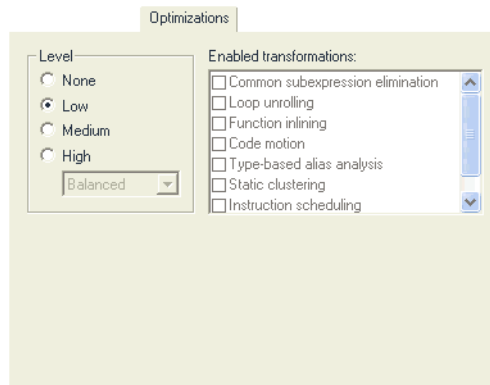


Figure 177: Compiler optimizations options

OPTIMIZATIONS

The IAR C/C++ Compiler supports different levels of optimizations, and for the highest level it is possible to fine-tune the optimizations explicitly for an optimization goal—size or speed. Choose between:

- **None** (best debug support)
- **Low**
- **Medium**
- **High, balanced** (balancing between speed and size)
- **High, speed** (favors speed)
- **High, size** (favors size).

By default, a debug project will have a size optimization that is fully debuggable, while a release project will have a high balanced optimization that generates small code without sacrificing speed.

For a list of optimizations performed at each optimization level, see the *IAR C/C++ Compiler Reference Guide*.

Enabled transformations

The following transformations are available on different level of optimizations:

- Common subexpression elimination
- Loop unrolling
- Function inlining
- Code motion
- Type-based alias analysis.

Note: Depending on your product installation, there might be additional transformations available.

When a transformation is available, you can enable or disable it by selecting its check box.

In a *debug* project, the transformations are by default disabled. In a *release* project, the transformations are by default enabled.

For a brief description of the transformations that can be individually disabled, see the *IAR C/C++ Compiler Reference Guide*.

Output

The **Output** options determine the output format of the compiled file, including the level of debugging information in the object code.

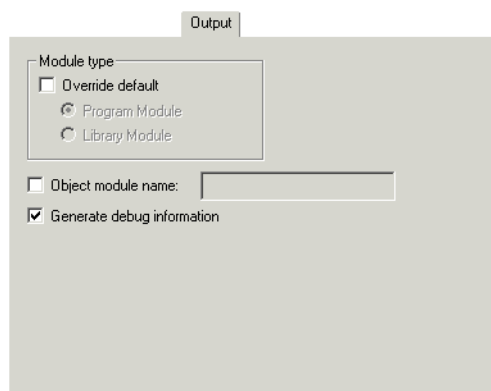


Figure 178: Compiler output options

MODULE TYPE

By default, the compiler generates *program* modules. Use this option to make a *library* module that will only be included if it is referenced in your application. Select the **Override default** check box and choose one of:

Program Module	The object file will be treated as a program module rather than as a library module.
Library Module	The object file will be treated as a library module rather than as a program module.

For information about program and library modules, and working with libraries, see the XLIB and XAR chapters in the *IAR Linker and Library Tools Reference Guide*, available from the **Help** menu.

GENERATE DEBUG INFORMATION

This option causes the compiler to include additional information in the object modules that is required by C-SPY® and other symbolic debuggers.

The **Generate debug information** option is selected by default. Deselect this option if you do not want the compiler to generate debug information.

Note: The included debug information increases the size of the object files.

List

The **List** options determine whether a list file is produced, and the information is included in the list file.

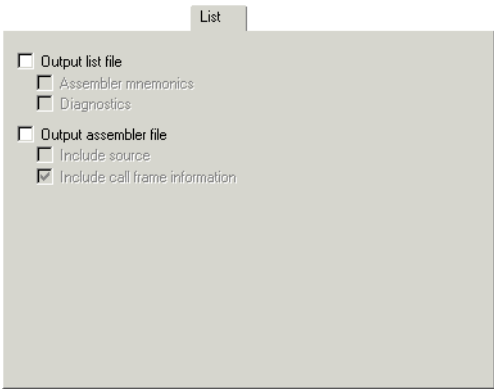


Figure 179: Compiler list file options

Normally, the compiler does not generate a list file. Select any of the following options to generate a list file or an assembler file. The list file will be saved in the `List` directory, and its filename will consist of the source filename, plus the filename extension `lst`. You can open the output files directly from the **Output** folder which is available in the Workspace window.

OUTPUT LIST FILE

Select the **Output list file** option and choose the type of information to include in the list file:

- | | |
|----------------------------|---|
| Assembler mnemonics | Includes assembler mnemonics in the list file. |
| Diagnostics | Includes diagnostic information in the list file. |

OUTPUT ASSEMBLER FILE

Select the **Output assembler file** option and choose the type of information to include in the list file:

- | | |
|---------------------------------------|---|
| Include source | Includes source code in the assembler file. |
| Include call frame information | Includes compiler-generated information for runtime model attributes, call frame information, and frame size information. |

Preprocessor

The **Preprocessor** options allow you to define symbols and include paths for use by the compiler.

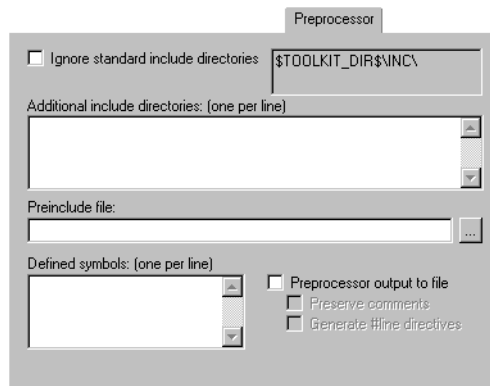


Figure 180: Compiler preprocessor options

IGNORE STANDARD INCLUDE DIRECTORIES

If you select this option, the standard include files will not be used when the project is built.

ADDITIONAL INCLUDE DIRECTORIES

The **Additional include directories** option adds a path to the list of `#include` file paths. The paths required by the product are specified by default depending on your choice of runtime library.

Type the full file path of your `#include` files.

Note: Any additional directories specified using this option will be searched before the standard include directories.

To make your project more portable, use the argument variable `$TOOLKIT_DIR$` for the subdirectories of the active product and `$PROJ_DIR$` for the directory of the current project. For an overview of the argument variables, see *Argument variables summary*, page 233.

PREINCLUDE FILE

Use this option to make the compiler include the specified include file before it starts to read the source file. This is useful if you want to change something in the source code for the entire application, for instance if you want to define a new symbol.

DEFINED SYMBOLS

The **Defined symbols** option is useful for conveniently specifying a value or choice that would otherwise be specified in the source file.

Type the symbols that you want to define for the project, for example:

```
TESTVER=1
```

Note that there should be no space around the equal sign.

The **Defined symbols** option has the same effect as a `#define` statement at the top of the source file.

For example, you might arrange your source to produce either the test or production version of your application depending on whether the symbol `TESTVER` was defined. To do this you would use include sections such as:

```
#ifdef TESTVER
... ; additional code lines for test version only
#endif
```

You would then define the symbol `TESTVER` in the Debug target but not in the Release target.

PREPROCESSOR OUTPUT TO FILE

By default, the compiler does not generate preprocessor output.

Select the **Preprocessor output to file** option if you want to generate preprocessor output. You can also choose to preserve comments and/or to generate `#line` directives.

Diagnostics

The **Diagnostics** options determine how diagnostics are classified and displayed. Use the diagnostics options to override the default classification of the specified diagnostics.

Note: The diagnostics cannot be suppressed for fatal errors, and fatal errors cannot be reclassified.

The image shows a 'Diagnostics' dialog box with the following controls:

- ☐ Enable remarks
- Suppress these diagnostics:
- Treat these as remarks:
- Treat these as warnings:
- Treat these as errors:
- ☐ Treat all warnings as errors

Figure 181: Compiler diagnostics options

ENABLE REMARKS

The least severe diagnostic messages are called *remarks*. A remark indicates a source code construct that might cause strange behavior in the generated code.

By default remarks are not issued. Select the **Enable remarks** option if you want the compiler to generate remarks.

SUPPRESS THESE DIAGNOSTICS

This option suppresses the output of diagnostics for the tags that you specify.

For example, to suppress the warnings `Pe117` and `Pe177`, type:

```
Pe117, Pe177
```

TREAT THESE AS REMARKS

A remark is the least severe type of diagnostic message. It indicates a source code construct that might cause strange behavior in the generated code. Use this option to classify diagnostics as remarks.

For example, to classify the warning `Pe177` as a remark, type:

```
Pe177
```

TREAT THESE AS WARNINGS

A *warning* indicates an error or omission that is of concern, but which will not cause the compiler to stop before compilation is completed. Use this option to classify diagnostic messages as warnings.

For example, to classify the remark Pe826 as a warning, type:

Pe826

TREAT THESE AS ERRORS

An *error* indicates a violation of the C or C++ language rules, of such severity that object code will not be generated, and the exit code will be non-zero. Use this option to classify diagnostic messages as errors.

For example, to classify the warning Pe117 as an error, type:

Pe117

TREAT ALL WARNINGS AS ERRORS

Use this option to make the compiler treat all warnings as errors. If the compiler encounters an error, object code is not generated.

Extra Options

The **Extra Options** page provides you with a command line interface to the compiler.

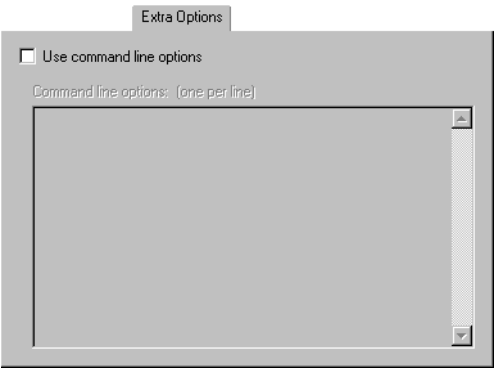


Figure 182: Extra Options page for the compiler

USE COMMAND LINE OPTIONS

Additional command line arguments for the compiler (not supported by the GUI) can be specified here.

Assembler options

This chapter describes the assembler options available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

Language

The **Language** options control the code generation of the assembler.

Note: Some of the options described here might not be available in the product version you are using.

USER SYMBOLS ARE CASE SENSITIVE

By default, case sensitivity is on. This means that, for example, `LABEL` and `label` refer to different symbols. You can deselect **User symbols are case sensitive** to turn case sensitivity off, in which case `LABEL` and `label` will refer to the same symbol.

ENABLE MULTIBYTE SUPPORT

By default, multibyte characters cannot be used in assembler source code. If you use this option, multibyte characters in the source code are interpreted according to the host computer's default setting for multibyte support.

Multibyte characters are allowed in comments, in string literals, and in character constants. They are transferred untouched to the generated code.

ALLOW MNEMONICS IN FIRST COLUMN

The default behavior by the assembler is to treat all identifiers starting in the first column as labels.

Use this option to make mnemonics names (without a trailing colon) starting in the first column to be recognized as mnemonics.

ALLOW DIRECTIVES IN FIRST COLUMN

The default behavior by the assembler is to treat all identifiers starting in the first column as labels.

Use this option to make directive names (without a trailing colon) that start in the first column to be recognized as directives.

MACRO QUOTE CHARACTERS

The **Macro quote characters** option sets the characters used for the left and right quotes of each macro argument.

By default, the characters are < and >. This option allows you to change the quote characters to suit an alternative convention or simply to allow a macro argument to contain < or >.

From the drop-down list, choose one of four types of brackets to be used as macro quote characters:




Figure 183: Choosing macro quote characters

Output

The **Output** options allow you to generate information to be used by a debugger such as the IAR C-SPY® Debugger.

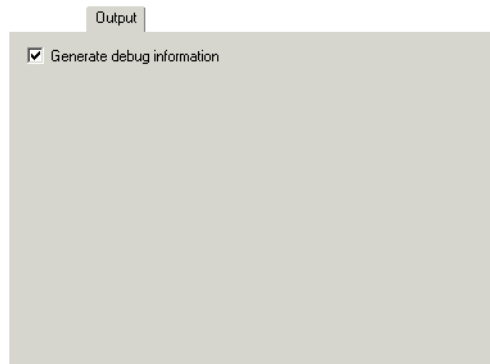


Figure 184: Assembler output options

GENERATE DEBUG INFORMATION

The **Generate debug information** option must be selected if you want to use a debugger with your application. By default, this option is selected in a Debug project, but not in a Release project.

List

The **List** options are used for making the assembler generate a list file and for selecting the list file contents. For reference information about each option, see the online help system available from the **Help** menu.

Preprocessor

The **Preprocessor** options allow you to define include paths and symbols in the assembler.

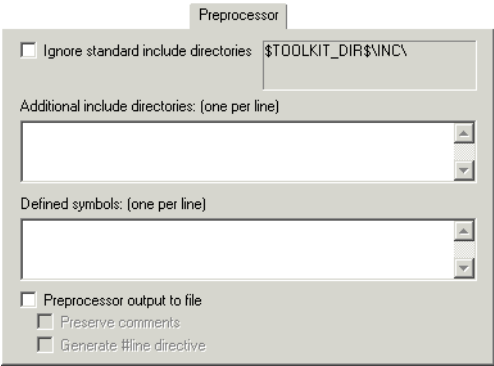


Figure 185: Assembler preprocessor options

IGNORE STANDARD INCLUDE DIRECTORIES

If you select this option, the standard include files will not be used when the project is built.

ADDITIONAL INCLUDE DIRECTORIES

The **Additional include directories** option adds paths to the list of `#include` file paths. The path required by the product is specified by default.

Type the full path of the directories that you want the assembler to search for `#include` files.

To make your project more portable, use the argument variable `$TOOLKIT_DIR$` for the subdirectories of the active product and `$PROJ_DIR$` for the directory of the current project. For an overview of the argument variables, see Table 46, *Argument variables*, page 233.

See the *IAR Assembler Reference Guide* for information about the `#include` directive.

Note: By default the assembler also searches for `#include` files in the paths specified in the `ACPUNAME_INC` environment variable. We do not, however, recommend that you use environment variables in the IAR Embedded Workbench IDE.

DEFINED SYMBOLS

This option provides a convenient way of specifying a value or choice that you would otherwise have to specify in the source file.

Type the symbols you want to define, one per line.

- For example, you might arrange your source to produce either the test or production version of your application depending on whether the symbol `TESTVER` was defined. To do this you would use include sections such as:

```
#ifdef TESTVER
... ; additional code lines for test version only
#endif
```

You would then define the symbol `TESTVER` in the Debug target but not in the Release target.

- Alternatively, your source might use a variable that you need to change often, for example `FRAMERATE`. You would leave the variable undefined in the source and use this option to specify a value for the project, for example `FRAMERATE=3`.

To delete a user-defined symbol, select in the **Defined symbols** list and press the Delete key.

PREPROCESSOR OUTPUT TO FILE

By default the assembler does not generate preprocessor output.

Select the **Preprocessor output to file** option if you want to generate preprocessor output. You can also choose to preserve comments and/or to generate `#line` directives.

Note: This option might not be available in the product version you are using.

Diagnostics

The **Diagnostics** options determine how diagnostics are classified and displayed. Use the diagnostics options to override the default classification of the specified diagnostics.

For reference information about each option, see the online help system available from the **Help** menu.

Extra Options

The **Extra Options** page provides you with a command line interface to the assembler.

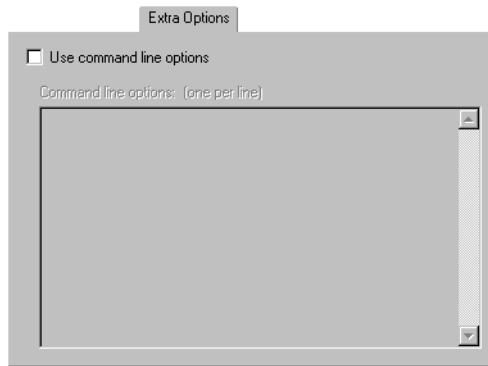


Figure 186: Extra Options page for the assembler

USE COMMAND LINE OPTIONS

Additional command line arguments for the assembler (not supported by the GUI) can be specified here.

Custom build options

This chapter describes the Custom Build options available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

Custom Tool Configuration

To set custom build options in the IAR Embedded Workbench IDE, choose **Project>Options** to display the **Options** dialog box. Then select **Custom Build** in the **Category** list to display the **Custom Tool Configuration** page:

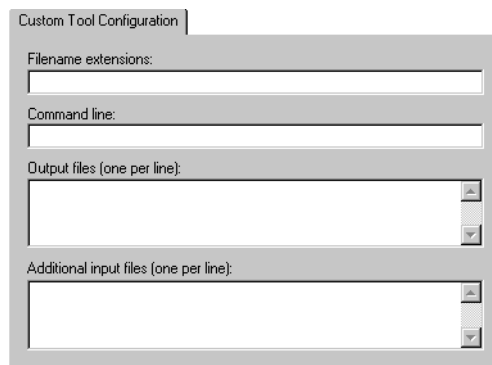


Figure 187: Custom tool options

In the **Filename extensions** text box, specify the filename extensions for the types of files that are to be processed by this custom tool. You can enter several filename extensions. Use commas, semicolons, or blank spaces as separators. For example:

```
.htm; .html
```

In the **Command line** text box, type the command line for executing the external tool.

In the **Output files** text box, enter the output files from the external tool.

If there are any additional files that are used by the external tool during the building process, these files should be added in the **Additional input files** text box. If these additional input files, so-called dependency files, are modified, the need for a rebuild is detected.

For an example, see *Extending the tool chain*, page 89.

Build actions options

This chapter describes the options for pre-build and post-build actions available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

Build Actions Configuration

To set options for pre-build and post-build actions in the IAR Embedded Workbench IDE, choose **Project>Options** to display the **Options** dialog box. Then select **Build Actions** in the **Category** list to display the **Build Actions Configuration** page.

These options apply to the whole build configuration, and cannot be set on groups or files.

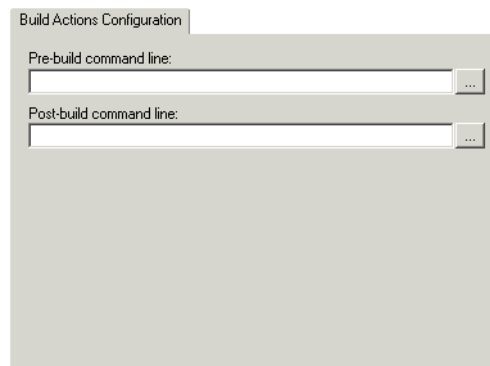


Figure 188: Build actions options

PRE-BUILD COMMAND LINE

Type a command line to be executed directly before a build a browse button for locating an extended command line file is available for your convenience. The commands will not be executed if the configuration is already up-to-date.

POST-BUILD COMMAND LINE

Type a command line to be executed directly after each successful build a browse button is available for your convenience. The commands will not be executed if the

configuration was up-to-date. This is useful for copying or post-processing the output file.

Linker options

This chapter describes the XLINK options available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

Note that the XLINK command line options that are used for defining segments in a linker command file are described in the *IAR Linker and Library Tools Reference Guide*.

Output

The **Output** options are used for specifying the output format and the level of debugging information included in the output file.

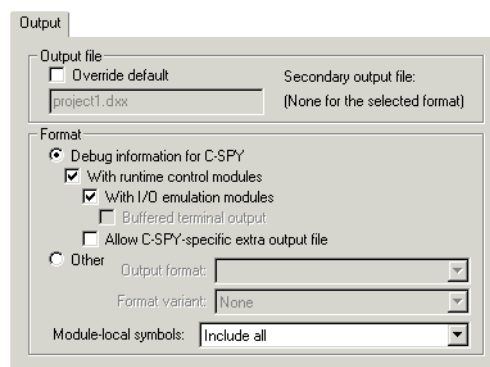


Figure 189: XLINK output file options

OUTPUT FILE

Use **Output file** to specify the name of the XLINK output file. If a name is not specified, the linker will use the project name with a filename extension. The filename extension depends on which output format you choose. If you choose **Debug information for C-SPY**, the output file will have the filename extension `dxx`.

Note: If you select a format that generates two output files, the file type that you specify will only affect the primary output file (first format).

Override default

Use this option to specify a filename or filename extension other than the default.

FORMAT

The output options determine the format of the output file generated by the IAR XLINK Linker. The output file is used as input to either a debugger or as input for programming the target system. The IAR Systems proprietary output format is called UBROF, Universal Binary Relocatable Object Format.

The default output settings are:

- In a *debug* project, **Debug information for C-SPY**, **With runtime control modules**, and **With I/O emulation modules** are selected by default
- In a *release* project, an output format suitable for target download is selected by default.

Note: For debuggers other than C-SPY®, check the user documentation supplied with that debugger for information about which format/variant should be used.

Debug information for C-SPY

This option creates a UBROF output file, with a `dxxx` filename extension, to be used with the IAR C-SPY Debugger.

With runtime control modules

This option produces the same output as the **Debug information for C-SPY** option, but also includes debugger support for handling program abort, exit, and assertions. Special C-SPY variants for the corresponding library functions are linked with your application. For more information about the debugger runtime interface, see the *IAR C/C++ Compiler Reference Guide*.

With I/O emulation modules

This option produces the same output as the **Debug information for C-SPY** and **With runtime control modules** options, but also includes debugger support for I/O handling, which means that `stdin` and `stdout` are redirected to the Terminal I/O window, and that it is possible to access files on the host computer during debugging.

For more information about the debugger runtime interface, see the *IAR C/C++ Compiler Reference Guide*.

Buffered terminal output

During program execution in C-SPY, instead of instantly printing each new character to the C-SPY Terminal I/O window, this option will buffer the output. This option is useful when using debugger systems that have slow communication.

Allow C-SPY-specific extra output file

Use this option to enable the options available on the **Extra Output** page.

If you choose any of the options **With runtime control modules** or **With I/O emulation modules**, the generated output file will contain dummy implementations for certain library functions, such as `putchar`, and extra debug information required by C-SPY to handle those functions. In this case, the options available on the **Extra Output** page are disabled, which means you cannot generate an extra output file. The reason is that the extra output file would still contain the dummy functions, but would lack the required extra debug information, and would therefore normally be useless.

However, for *some* debugger systems, two output files from the same build process are required—one with the required debug information, and one that you can burn to your hardware before debugging. This is useful when you want to debug code that is located in non-volatile memory. In this case, you must choose the **Allow C-SPY-specific extra output file** option to make it possible to generate an extra output file.

Other

Use this option to generate output other than those generated by the options **Debug information for C-SPY**, **With runtime control modules**, and **With I/O emulation modules**.

Use the **Output format** drop-down list to select the appropriate output. If applicable, use **Format variant** to select variants available for some of the output formats. The alternatives depend on the output format chosen.

When you specify the **Other>Output format** option as either **debug (ubrof)**, or **ubrof**, a UBROF output file with the filename extension `dbg` will be created. The generated output file will not contain debugging information for simulating facilities such as stop at program exit, long jump instructions, and terminal I/O. If you need support for these facilities during debugging, use the **Debug information for C-SPY**, **With runtime control modules**, and **With I/O emulation modules** options, respectively.

For more information, see the *IAR Linker and Library Tools Reference Guide*.

Module-local symbols

Use this option to specify whether local (non-public) symbols in the input modules should be included or not by the IAR XLINK Linker. If suppressed, the local symbols

will not appear in the listing cross-reference and they will not be passed on to the output file.

You can choose to ignore just the compiler-generated local symbols, such as jump or constant labels. Usually these are only of interest when debugging at assembler level.

Note: Local symbols are only included in files if they were compiled or assembled with the appropriate option to specify this.

Extra Output

The **Extra Output** options are used for generating an extra output file and for specifying its format.

Note: If you have chosen any of the options **With runtime control modules** or **With I/O emulation modules** available on the **Output** page, you must also choose the option **Allow C-SPY-specific extra output file** to enable the **Extra Output** options.

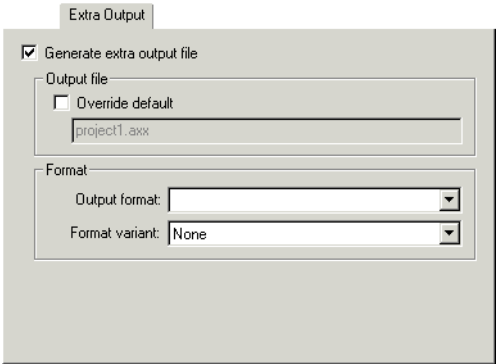


Figure 190: XLINK extra output file options

Use the **Generate extra output file** option to generate an additional output file from the build process.

Use the **Override default** option to override the default file name. If a name is not specified, the linker will use the project name and a filename extension which depends on the output format you choose.

Note: If you select a format that generates two output files, the file type that you specify will only affect the primary output file (first format).

Use the **Output format** drop-down list to select the appropriate output. If applicable, use **Format variant** to select variants available for some of the output formats. The alternatives depend on the output format you have chosen.

When you specify the **Output format** option as either **debug (ubrof)**, or **ubrof**, a UBROF output file with the filename extension `dbg` will be created.

#define

You can define symbols with the **#define** option.

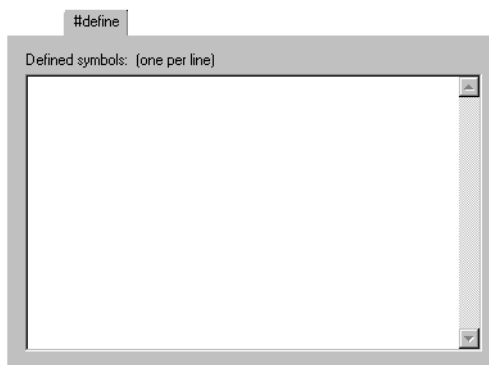


Figure 191: Linker defined symbols options

DEFINE SYMBOL

Use **Define symbol** to define absolute symbols at link time. This is especially useful for configuration purposes.

Type the symbols that you want to define for the project, for example:

```
TESTVER=1
```

Note that there should be no space around the equal sign.

Any number of symbols can be defined in a linker command file. The symbol(s) defined in this manner will be located in a special module called `?ABS_ENTRY_MOD`, which is generated by the linker.

The linker will display an error message if you attempt to redefine an existing symbol.

Diagnostics

The **Diagnostics** options determine the error and warning messages generated by the IAR XLINK Linker.

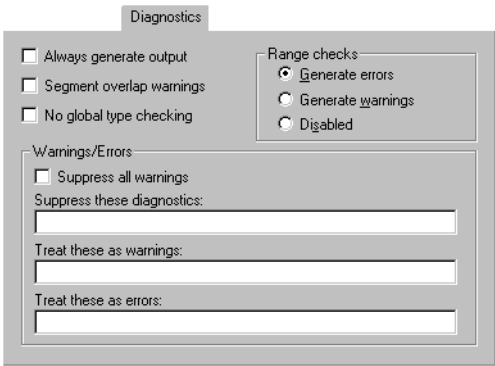


Figure 192: Linker diagnostics options

ALWAYS GENERATE OUTPUT

Use **Always generate output** to generate an output file even if a non-fatal error was encountered during the linking process, such as a missing global entry or a duplicate declaration. Normally, XLINK will not generate an output file if an error is encountered.

Note: XLINK always aborts on fatal errors, even when this option is used.

The **Always generate output** option allows missing entries to be patched in later in the absolute output image.

SEGMENT OVERLAP WARNINGS

Use **Segment overlap warnings** to reduce segment overlap errors to warnings, making it possible to produce cross-reference maps, etc.

NO GLOBAL TYPE CHECKING

Use **No global type checking** to disable type checking at link time. While a well-written application should not need this option, there may be occasions where it is helpful.

By default, XLINK performs link-time type checking between modules by comparing the external references to an entry with the `PUBLIC` entry (if the information exists in the object modules involved). A warning is generated if there are mismatches.

RANGE CHECKS

Use **Range checks** to specify the address range check. The following table shows the range check options in the IAR Embedded Workbench IDE:

Option	Description
Generate errors	An error message is generated
Generate warnings	Range errors are treated as warnings
Disabled	Disables the address range checking

Table 77: XLINK range check options

If an address is relocated outside address range of the target CPU —code, external data, or internal data address—an error message is generated. This usually indicates an error in an assembler language module or in the segment placement.

WARNINGS/ERRORS

By default, the IAR XLINK Linker generates a warning when it detects that something may be wrong, although the generated code might still be correct. The **Warnings/Errors** options allow you to suppress or enable all warnings, and to change the severity classification of errors and warnings.

Refer to the *IAR Linker and Library Tools Reference Guide* for information about the different warning and error messages.

Use the following options to control the generation of warning and error messages:

Suppress all warnings

Use this option to suppress all warnings.

Suppress these diagnostics

This option suppresses the output of diagnostics for the tags that you specify.

For example, to suppress the warnings w117 and w177, type w117,w177.

Treat these as warnings

Use this option to specify errors that should be treated as warnings instead. For example, to make error 106 become treated as a warning, type e106.

Treat these as errors

Use this option to specify warnings that should be treated as errors instead. For example, to make warning 26 become treated as an error, type w26.

List

The **List** options determine the generation of an XLINK cross-reference listing.

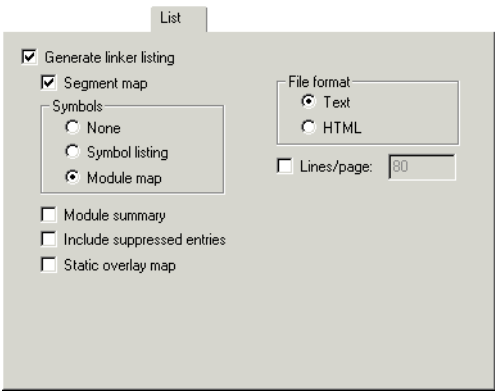


Figure 193: Linker list file options

GENERATE LINKER LISTING

Causes the linker to generate a listing and send it to the file `projectname.map`.

Segment map

Use **Segment map** to include a segment map in the XLINK listing file. The segment map will contain a list of all the segments in dump order.

Symbols

The following options are available:

Option	Description
None	Symbols will be excluded from the linker listing.
Symbol listing	An abbreviated list of every entry (global symbol) in every module. This entry map is useful for quickly finding the address of a routine or data element.
Module map	A list of all segments, local symbols, and entries (public symbols) for every module in the application.

Table 78: XLINK list file options

Module summary

Use the **Module summary** option to generate a summary of the contributions to the total memory use from each module.

Only modules with a contribution to memory use are listed.

Include suppressed entries

Use this option to include all segment parts in a linked module in the list file, not just the segment parts that were included in the output. This makes it possible to determine exactly which entries that were not needed.

Static overlay map

If the compiler uses static overlay, this option includes a listing of the static overlay system in the list file. Read more about static overlay maps in the *IAR Linker and Library Tools Reference Guide*.

File format

The following options are available:

Option	Description
Text	Plain text file
HTML	HTML format, with hyperlinks

Table 79: XLINK list file format options

Lines/page

Sets the number of lines per page for the XLINK listings to *lines*, which must be in the range 10 to 150.

Config

With the **Config** options you can specify the path and name of the linker command file, override the default program entry, and specify the library search path.

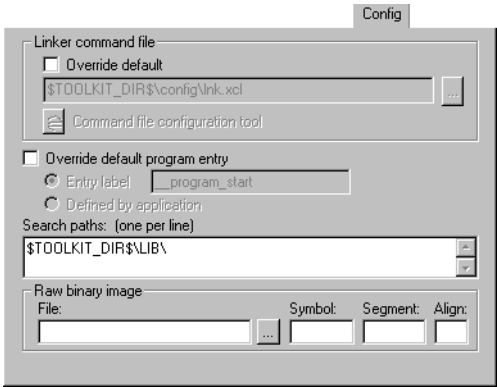


Figure 194: Linker config options

LINKER COMMAND FILE

A default linker command file is selected automatically for the chosen **Target** settings in the **General Options** category. You can override this by selecting the **Override default** option, and then specifying an alternative file.

The argument variables \$TOOLKIT_DIR\$ or \$PROJ_DIR\$ can be used here too, to specify a project-specific or predefined linker command file.

COMMAND FILE CONFIGURATION TOOL

You can override the default linker command file and click **Command file configuration tool** to configure a linker command file yourself. For more information about the options related to the configuration tool, see the online help system available from the **Help** menu. Note that this option might not be available in your product version.

For information about the command file configuration tool, see *Processing*, page 344.

OVERRIDE DEFAULT PROGRAM ENTRY

By default, the program entry is the label __program_start. The linker will make sure that a module containing the program entry label is included, and that the segment part containing the label is not discarded.

The default program handling can be overridden by selecting **Override default program entry**.

Selecting the option **Entry label** will make it possible to specify a label other than `__program_start` to use for the program entry.

Selecting the option **Defined by application** will disable the use of a start label. The linker will, as always, include all program modules, and enough library modules to satisfy all symbol references, keeping all segment parts that are marked with the `root` attribute or that are referenced, directly or indirectly, from such a segment part.

SEARCH PATHS

The **Search paths** option specifies the names of the directories which XLINK will search if it fails to find the object files to be linked in the current working directory. Add the full paths of any further directories that you want XLINK to search.

The paths required by the product are specified by default, depending on your choice of runtime library. If the box is left empty, XLINK searches for object files only in the current working directory.

Type the full file path of your `#include` files. To make your project more portable, use the argument variable `$TOOLKIT_DIR$` for the subdirectories of the active product and `$PROJ_DIR$` for the directory of the current project. For an overview of the argument variables, see *Argument variables summary*, page 233.

RAW BINARY IMAGE

Use the **Raw binary image** options to link pure binary files in addition to the ordinary input files. Use the text boxes to specify the following parameters:

File	The pure binary file you want to link.
Symbol	The symbol defined by the segment part where the binary data is placed.
Segment	The segment where the binary data will be placed.
Align	The alignment of the segment part where the binary data is placed.

The entire contents of the file are placed in the segment you specify, which means it can only contain pure binary data, for example, the raw-binary output format. The segment part where the contents of the specified file is placed, is only included if the specified symbol is required by your application. Use the `-g` linker option if you want to force a reference to the symbol. Read more about single output files and the `-g` option in the *IAR Linker and Library Tools Reference Guide*.

Processing

With the **Processing** options you can specify details about how the code is generated.

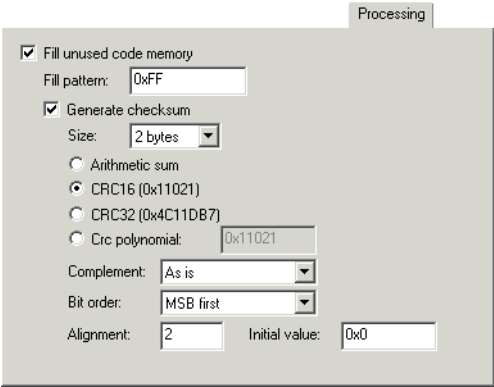


Figure 195: XLINK processing options

FILL UNUSED CODE MEMORY

Use **Fill unused code memory** to fill all gaps between segment parts introduced by the linker with the value you enter. The linker can introduce gaps either because of alignment restriction, or at the end of ranges given in segment placement options.

The default behavior, when this option is not used, is that these gaps are not given a value in the output file.

Fill pattern

Use this option to specify size, in hexadecimal notation, of the filler to be used in gaps between segment parts.

Generate checksum

Use **Generate checksum** to checksum all generated raw data bytes. This option can only be used if the **Fill unused code memory** option has been specified.

Size

Size specifies the number of bytes in the checksum, which can be 1, 2, or 4.

Algorithms

One of the following algorithms can be used:

Algorithms	Description
Arithmetic sum	Simple arithmetic sum
CRC16	CRC16, generating polynomial 0x11021 (default)
CRC32	CRC32, generating polynomial 0x104C11DB7
Crc polynomial	CRC with a generating polynomial of the value you enter

Table 80: XLINK checksum algorithms

Complement

Use the **Complement** drop-down list to specify the one’s complement or two’s complement.

Bit order

By default it is the most significant 1, 2, or 4 bytes (**MSB**) of the result that will be output, in the natural byte order for the processor. Choose **LSB** from the **Bit order** drop-down list if you want the least significant bytes to be output.

Alignment

Use this option to specify an optional alignment for the checksum. If you do not specify an alignment explicitly, an alignment of 2 is used.

Initial value

Use this option to specify the initial value of the checksum. This is useful if the microcontroller you are using has its own checksum calculation and you want that calculation to correspond to the calculation performed by XLINK.

THE CHECKSUM CALCULATION

The CRC checksum is calculated as if the following code was called for each bit in the input, starting with a CRC of 0:

```

unsigned long
crc(int bit, unsigned long oldcrc)
{
    unsigned long newcrc = (oldcrc << 1) ^ bit;
    if (oldcrc & 0x80000000)
        newcrc ^= POLY;
    return newcrc;
}

```

POLY is the generating polynomial. The checksum is the result of the final call to this routine. If the complement is specified, the checksum is the one's or two's complement of the result.

The linker will place the checksum byte(s) at the `__checksum` label in the `CHECKSUM` segment. This segment must be placed using the segment placement options like any other segment.

For additional information about segment control, see the *IAR Linker and Library Tools Reference Guide*.

Extra Options

The **Extra Options** page provides you with a command line interface to the linker.

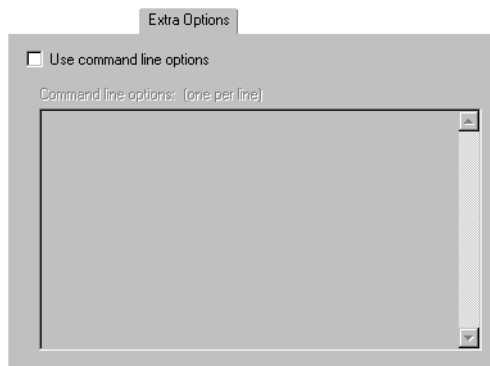


Figure 196: Extra Options page for the linker

USE COMMAND LINE OPTIONS

Additional command line arguments for the linker (not supported by the GUI) can be specified here.

Library builder options

This chapter describes the library builder options available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

Output

Options for the library builder are not available by default. Before you can set these options in the IAR Embedded Workbench IDE, you must add the library builder tool to the list of categories. Choose **Project>Options** to display the **Options** dialog box, and select the **General Options** category. On the **Output** page, select the **Library** option.

If you select the **Library** option, **Library Builder** appears as a category in the **Options** dialog box. As a result of the build process, the library builder will create a library output file. Before you create the library you can set output options.

To set options, select **Library Builder** from the category list to display the options.

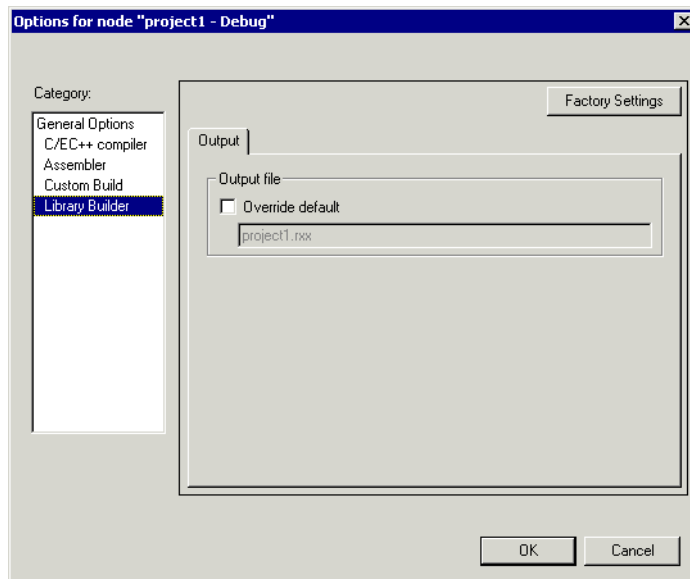


Figure 197: Library builder output options

To restore all settings to the default factory settings, click the **Factory Settings** button.

The **Output file** option overrides the default name of the output file. Enter a new name in the **Override default** text box.

Debugger options

This chapter describes the C-SPY® options available in the IAR Embedded Workbench® IDE.

For information about how to set options, see *Setting options*, page 85.

In addition, for information about options specific to the C-SPY hardware debugger systems, see the online help system available from the Help menu.

Setup

To set C-SPY options in the IAR Embedded Workbench IDE, choose **Project>Options** to display the **Options** dialog box. Then select **Debugger** in the **Category** list. The **Setup** page contains the generic C-SPY options.

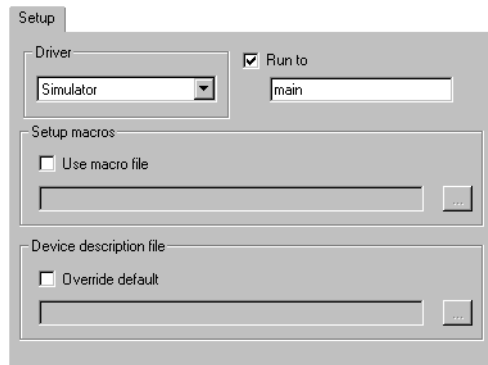


Figure 198: Generic C-SPY options

To restore all settings to the default factory settings, click the **Factory Settings** button.

The **Setup** options specify the C-SPY driver, the setup macro file, and device description file to be used, and which default source code location to run to.

DRIVER

Selects the appropriate driver for use with C-SPY, for example a simulator or an emulator.

Contact your distributor or IAR Systems representative, or visit the IAR Systems web site at www.iar.com for the most recent information about the available C-SPY drivers.

RUN TO

Use this option to specify a location you want C-SPY to run to when you start the debugger and after a reset.

The default location to run to is the `main` function. Type the name of the location if you want C-SPY to run to a different location. You can specify assembler labels or whatever can be evaluated to such, for example function names.

If the option is deselected, the program counter will contain the regular hardware reset address at each reset.

SETUP MACROS

To register the contents of a setup macro file in the C-SPY startup sequence, select **Use macro file** and enter the path and name of the setup file, for example `SetupSimple.mac`. If no extension is specified, the extension `mac` is assumed. A browse button is available for your convenience.

DEVICE DESCRIPTION FILE

Use this option to load a device description file that contains device-specific information.

For details about the device description file, see *Selecting a device description file*, page 110.

Device description files are provided in the directory `cpuname\config` and have the filename extension `ddf`.

Download

Options specific to the C-SPY drivers are described in the online help system available from the **Help** menu.

Extra Options

The **Extra Options** page provides you with a command line interface to the C-SPY debugger.

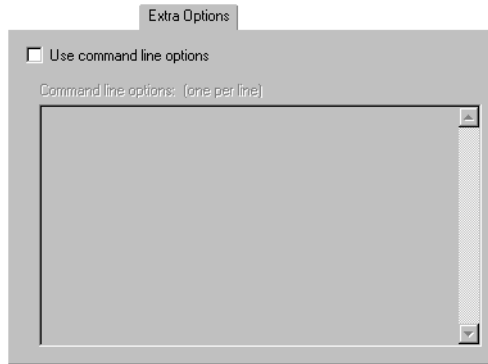


Figure 199: Extra Options page for the C-SPY debugger

USE COMMAND LINE OPTIONS

Additional command line arguments for the C-SPY debugger (not supported by the GUI) can be specified here.

Plugins

On the **Plugins** page you can specify C-SPY plugin modules to be loaded and made available during debug sessions. Plugin modules can be provided by IAR Systems, as

well as by third-party suppliers. Contact your software distributor or IAR representative, or visit the IAR Systems web site, for information about available modules.

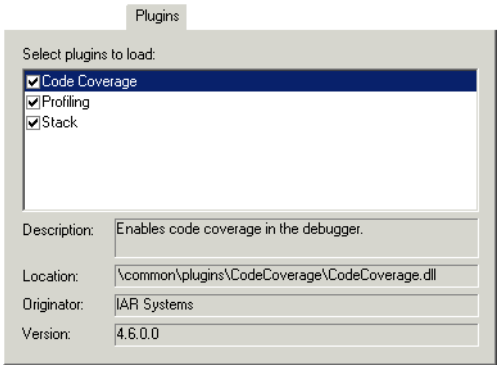


Figure 200: C-SPY plugin options

By default, **Select plugins to load** lists the plugin modules delivered with the product installation.

If you have any C-SPY plugin modules delivered by any third-party vendor, these will also appear in the list.

The `common\plugins` directory is intended for generic plugin modules. The `cpuname\plugins` directory is intended for target-specific plugin modules.

The IAR C-SPY Command Line Utility—cspybat

The C-SPY debugger can be executed in batch mode by using the IAR C-SPY Command Line Utility—cspybat.exe—which is described in this chapter.

Using C-SPY in batch mode

The IAR C-SPY debugger can be executed in batch mode if you use the command line utility cspybat, which you can find in the directory common\bin.

INVOCATION SYNTAX

The invocation syntax for cspybat is:

```
cspybat <processor DLL> <driver DLL> <debug file>
        [cspybat options] --backend <driver options>
```

Note: In those cases where a filename is required—including DLL files—you are recommended to give a full path to the filename.

Parameters

The parameters are:

Parameter	Description
<i>processor DLL</i>	The processor-specific DLL file; available in <i>cpuname</i> \bin.
<i>driver DLL</i>	The C-SPY driver DLL file; available in <i>cpuname</i> \bin.
<i>debug file</i>	The object file that you want to debug (filename extension <i>dx</i>).
<i>cspybat options</i>	The command line options that you want to pass to cspybat. Note that these options are optional. For information about each option, see <i>Descriptions of C-SPY command line options</i> , page 356.
<i>--backend</i>	Marks the beginning of the parameters to the C-SPY driver; all options that follow will be interpreted as driver options. Note that this option is mandatory.
<i>driver options</i>	The command line options that you want to pass to the C-SPY driver. Note that some of these options are mandatory and some are optional. For information about each option, see <i>Descriptions of C-SPY command line options</i> , page 356.

Table 81: cspybat parameters

Example

The following example starts `cspybat` using the simulator driver:

```
c:\<installation_dir>\common\bin\cspybat
c:\<installation_dir>\cpuname\bin\cpunameproc.dll
c:\<installation_dir>\cpuname\bin\cpunamesim.dll
c:\<proj_dir>\myproject.dxx --plugin
c:\<installation_dir>\cpuname\bin\cpunamebat.dll --backend -d sim
-B -p
c:\<installation_dir>\cpuname\bin\config\devicedescription.ddf
```

For a complete example, see the online help system available from the **Help** menu, alternatively the file `HelpTargetIDE2.chm` available in the `cpuname\doc` directory.

OUTPUT

When you run `cspybat`, the following type of output can be produced:

- Terminal output from `cspybat` itself

All such terminal output is directed to `stderr`. Note that if you run `cspybat` from the command line without any arguments, the `cspybat` version number and all available options including brief descriptions are directed to `stdout` and displayed on your screen.
- Terminal output from the application you are debugging

All such terminal output is directed to `stdout`.
- Error return codes

`cspybat` return status information to the host operating system that can be tested in a batch file. For *successful*, the value `int 0` is returned, and for *unsuccessful* the value `int 1` is returned.

USING AN AUTOMATICALLY GENERATED BATCH FILE

When you use C-SPY in the IAR Embedded Workbench IDE, C-SPY generates a batch file `projectname.cspy.bat` every time C-SPY is initialized. You can find the file in the directory `$PROJ_DIR$\settings`. This batch file contains the same settings as in the IDE, and with minimal modifications the file can be used from the command line to start `cspybat`. The file also contains information about required modifications.

IAR C-SPY command line options

General cspybat options

--backend	Marks the beginning of the parameters to be sent to the C-SPY driver (mandatory).
--cycles	Specifies the maximum number of cycles to run.
--flash_loader	Specifies a flash loader specification xml file.
--macro	Specifies a macro file to be used.
--plugin	Specifies a plugin file to be used.
--silent	Omits the sign-on message.

Options available for all C-SPY drivers

-B	Enables batch mode (mandatory).
-d	Specifies the C-SPY driver to be used.
-p	Specifies the device description file to be used.

Note that there might be additional target-specific options available. For a list of available options, see the online help system available from the **Help** menu, alternatively the file `HelpTargetIDE2.chm` available in the `cpuname\doc` directory.

Options available for the simulator driver

For a list of available options, see the online help system available from the **Help** menu, alternatively the file `HelpTargetIDE2.chm` available in the `cpuname\doc` directory.

Options available for the C-SPY hardware driver

For a list of available options, see the online help system available from the **Help** menu, alternatively the `HelpTargetHW.chm` file available in the `cpuname\doc` directory.

Descriptions of C-SPY command line options

This section gives detailed reference information about each `cspybat` option and each option available to the C-SPY drivers.

-B

Syntax	<code>-B</code>
Applicability	This option is mandatory and available to all C-SPY drivers, see <i>Invocation syntax</i> , page 353.
Description	Use this option to enable batch mode.

--backend

Syntax	<code>--backend {driver options}</code>
Parameters	<i>driver options</i> Any option available to the C-SPY driver you are using.
Applicability	<code>cspybat</code> option (mandatory).
Descriptions	Use this option to send options to the C-SPY driver. All options that follow <code>--backend</code> will be passed to the C-SPY driver, and will not be processed by <code>cspybat</code> itself.

--cycles

Syntax	<code>--cycles cycles</code>
Parameters	<i>cycles</i> The number of cycles to run.
Applicability	<code>cspybat</code> option.
Descriptions	Use this option to specify the maximum number of cycles to run. If the target program executes longer than the number of cycles specified, the target program will be aborted.

Using this option requires that the C-SPY driver you are using supports a cycle counter, and that it can be sampled while executing.

-d

Syntax	<code>-d {<i>driver1</i> <i>driver2</i>}</code>
Parameters	<i>driver1</i> <i>driver2</i> The C-SPY driver to be used.
Applicability	General C-SPY driver option.
Descriptions	Use this option to specify the C-SPY driver to be used.

--flash_loader

Syntax	<code>--flash_loader <i>filename</i></code>
Parameters	<i>filename</i> The flash loader specification xml file.
Applicability	cspybat option.
Descriptions	Use this option to specify a flash loader specification xml file which contains all relevant information about the flash loading. There can be more than one such argument, in which case each argument will be processed in the specified order, resulting in several flash programming passes.
See also	The <i>IAR Embedded Workbench flash loader User Guide</i> .

--macro

Syntax	<code>--macro <i>filename</i></code>
Parameters	<i>filename</i> The C-SPY macro file to be used (filename extension <code>mac</code>).
Applicability	cspybat option.

Descriptions	Use this option to specify a C-SPY macro file to be loaded before executing the target application. This option can be used more than once on the command line.
See also	<i>The macro file</i> , page 144

-p

Syntax	<code>-p filename</code>
Parameters	<code>filename</code> The device description file to be used.
Applicability	General C-SPY driver option.
Descriptions	Use this option to specify the device description file to be used.
See also	<i>Selecting a device description file</i> , page 110

--plugin

Syntax	<code>--plugin filename</code>
Parameters	<code>filename</code> The plugin file to be used (filename extension <code>dll</code>).
Applicability	<code>cspybat</code> option.
Descriptions	<p>Certain C/C++ standard library functions, for example <code>printf</code>, can be supported by C-SPY instead of by real devices on your hardware (for example, the C-SPY Terminal I/O window). To enable such support in <code>cspybat</code>, a dedicated plugin module called <code>cpunameLibSupport.dll</code> or <code>cpunamebat.dll</code> located in the <code>cpuname\bin</code> directory must be used.</p> <p>Use this option to include this plugin during the debug session. This option can be used more than once on the command line.</p> <p>Note: This option can be used for including also other plugin modules, but in that case the module must be able to work with <code>cspybat</code> specifically. This means that the C-SPY plugin modules located in the <code>cpuname\doc</code> directory cannot normally be used with <code>cspybat</code>.</p>

See also *The macro file*, page 144

--silent

Syntax `--silent`

Applicability `cspybat` option.

Descriptions Use this option to omit the sign-on message.

C-SPY® macros reference

This chapter gives reference information about the C-SPY macros. First a syntax description of the macro language is provided. Then, the available setup macro functions and the pre-defined system macros are summarized. Finally, each system macro is described in detail.

The macro language

The syntax of the macro language is very similar to the C language. There are *macro statements*, which are similar to C statements. You can define *macro functions*, with or without parameters and return value. You can use built-in system macros, similar to C library functions. Finally, you can define global and local *macro variables*. You can collect your macro functions in a *macro file* (filename extension *mac*).

MACRO FUNCTIONS

C-SPY macro functions consist of C-SPY variable definitions and macro statements which are executed when the macro is called. An unlimited number of parameters can be passed to a macro function, and macro functions can return a value on exit.

A C-SPY macro has the following form:

```
macroName (parameterList)
{
    macroBody
}
```

where *parameterList* is a list of macro parameters separated by commas, and *macroBody* is any series of C-SPY variable definitions and C-SPY statements.

Type checking is neither performed on the values passed to the macro functions nor on the return value.

PREDEFINED SYSTEM MACRO FUNCTIONS

The macro language also includes a wide set of predefined system macro functions (built-in functions), similar to C library functions. For detailed information about each system macro, see *Description of C-SPY system macros*, page 368.

MACRO VARIABLES

A macro variable is a variable defined and allocated outside your application space. It can then be used in a C-SPY expression. For detailed information about C-SPY expressions, see the chapter *C-SPY expressions*, page 121.

The syntax for defining one or more macro variables is:

```
__var nameList;
```

where *nameList* is a list of C-SPY variable names separated by commas.

A macro variable defined outside a macro body has global scope, and it exists throughout the whole debugging session. A macro variable defined within a macro body is created when its definition is executed and destroyed on return from the macro.

By default, macro variables are treated as signed integers and initialized to 0. When a C-SPY variable is assigned a value in an expression, it also acquires the type of that expression. For example:

Expression	What it means
myvar = 3.5;	myvar is now type float, value 3.5.
myvar = (int*)i; myvar =	myvar is now type pointer to int, and the value is the same as i.

Table 82: Examples of C-SPY macro variables

In case of a name conflict between a C symbol and a C-SPY macro variable, C-SPY macro variables have a higher precedence than C variables. Note that macro variables are allocated on the debugger host and do not affect your application.

Macro strings

In addition to C types, macro variables can hold values of *macro strings*. Note that macro strings differ from C language strings.

When you write a string literal, such as "Hello!", in a C-SPY expression, the value is a macro string. It is not a C-style character pointer *char**, because *char** must point to a sequence of characters in target memory and C-SPY cannot expect any string literal to actually exist in target memory.

You can manipulate a macro string using a few built-in macro functions, for example *__strFind* or *__subString*. The result can be a new macro string. You can concatenate macro strings using the + operator, for example *str + "tail"*. You can also access individual characters using subscription, for example *str[3]*. You can get the length of a string using *sizeof(str)*. Note that a macro string is not NULL-terminated.

The macro function `__toString` is used for converting from a NULL-terminated C string in your application (`char*` or `char[]`) to a macro string. For example, assume the following definition of a C string in your application:

```
char const *cstr = "Hello";
```

Then examine the following examples:

```
__var str;           /* A macro variable */
str = cstr            /* str is now just a pointer to char */
sizeof str           /* same as sizeof (char*), typically 2 or 4 */
str = __toString(cstr,512) /* str is now a macro string */
sizeof str           /* 5, the length of the string */
str[1]               /* 101, the ASCII code for 'e' */
str += " World!"     /* str is now "Hello World!" */
```

See also *Formatted output*, page 364.

MACRO STATEMENTS

Statements are expected to behave in the same way as the corresponding C statements would do. The following C-SPY macro statements are accepted:

Expressions

```
expression;
```

For detailed information about C-SPY expressions, see *C-SPY expressions*, page 121.

Conditional statements

```
if (expression)
    statement
```

```
if (expression)
    statement
else
    statement
```

Loop statements

```
for (init_expression; cond_expression; update_expression)
    statement
```

```
while (expression)
    statement
```

```
do
    statement
```

```
while (expression);
```

Return statements

```
return;
```

```
return expression;
```

If the return value is not explicitly set, signed int 0 is returned by default.

Blocks

Statements can be grouped in blocks.

```
{
    statement1
    statement2
    .
    .
    .
    statementN
}
```

FORMATTED OUTPUT

C-SPY provides different methods for producing formatted output:

<code>__message <i>argList</i>;</code>	Prints the output to the Debug Log window.
<code>__fmessage <i>file</i>, <i>argList</i>;</code>	Prints the output to the designated file.
<code>__smessage <i>argList</i>;</code>	Returns a string containing the formatted output.

where *argList* is a comma-separated list of C-SPY expressions or strings, and *file* is the result of the `__openFile` system macro, see `__openFile`, page 372.

Examples

Use the `__message` statement, as in the following example:

```
var1 = 42;
var2 = 37;
__message "This line prints the values ", var1, " and ", var2,
" in the Log window.";
```

This should produce the following message in the Log window:

This line prints the values 42 and 37 in the Log window.

Use `__fmessage` to write the output to the designated file, for example:

```
__fmessage myfile, "Result is ", res, "!\n";
```

Finally, use `__smessage` to produce strings, for example:

```
myMacroVar = __smessage 42, " is the answer.";
```

`myMacroVar` now contains the string "42 is the answer".

Specifying display format of arguments

It is possible to override the default display format of a scalar argument (number or pointer) in *argList* by suffixing it with a `:` followed by a format specifier. Available specifiers are `%b` for binary, `%o` for octal, `%d` for decimal, `%x` for hexadecimal and `%c` for character. These match the formats available in the Watch and Locals windows, but number prefixes and quotes around strings and characters are not printed. Another example:

```
__message "The character '", cvar:%c, "' has the decimal value  
", cvar;
```

This might produce:

```
The character 'A' has the decimal value 65
```

Note: A character enclosed in single quotes (a character literal) is an integer constant and is not automatically formatted as a character. For example:

```
__message 'A', " is the numeric value of the character ",  
'A':%c;
```

would produce:

```
65 is the numeric value of the character A
```

Note: The default format for certain types is primarily designed to be useful in the Watch window and other related windows. For example, a value of type `char` is formatted as 'A' (0x41), while a pointer to a character (potentially a C string) is formatted as 0x8102 "Hello", where the string part shows the beginning of the string (currently up to 60 characters).

When printing a value of type `char*`, use the `%x` format specifier to print just the pointer value in hexadecimal notation, or use the system macro `__toString` to get the full string value.

Setup macro functions summary

The following table summarizes the available setup macro functions:

Macro	Description
<code>execUserPreload</code>	Called after communication with the target system is established but before downloading the target application. Implement this macro to initialize memory locations and/or registers which are vital for loading data properly.
<code>execUserFlashInit</code>	Called once before the flash loader is downloaded to RAM. Implement this macro typically for setting up the memory map required by the flash loader. This macro is only called when you are programming flash, and it should only be used for flash loader functionality.
<code>execUserSetup</code>	Called once after the target application is downloaded. Implement this macro to set up the memory map, breakpoints, interrupts, register macro files, etc.
<code>execUserFlashReset</code>	Called once after the flash loader is downloaded to RAM, but before execution of the flash loader. This macro is only called when you are programming flash, and it should only be used for flash loader functionality.
<code>execUserReset</code>	Called each time the reset command is issued. Implement this macro to set up and restore data.
<code>execUserExit</code>	Called once when the debug session ends. Implement this macro to save status data etc.
<code>execUserFlashExit</code>	Called once when the debug session ends. Implement this macro to save status data etc. This macro is useful for flash loader functionality.

Table 83: C-SPY setup macros

Note: If you define interrupts or breakpoints in a macro file that is executed at system start (using `execUserSetup`) we strongly recommend that you also make sure that they are removed at system shutdown (using `execUserExit`). An example is available in `SetupSimple.mac`, see *Simulating an interrupt*, page 53.

The reason for this is that the simulator saves interrupt settings between sessions and if they are not removed they will get duplicated every time `execUserSetup` is executed again. This seriously affects the execution speed.

C-SPY system macros summary

The following table summarizes the pre-defined system macros:

Macro	Description
<code>__cancelAllInterrupts</code>	Cancels all ordered interrupts
<code>__cancelInterrupt</code>	Cancels an interrupt
<code>__clearBreak</code>	Clears a breakpoint
<code>__closeFile</code>	Closes a file that was opened by <code>__openFile</code>
<code>__disableInterrupts</code>	Disables generation of interrupts
<code>__driverType</code>	Verifies the driver type
<code>__enableInterrupts</code>	Enables generation of interrupts
<code>__evaluate</code>	Interprets the input string as an expression and evaluates it.
<code>__openFile</code>	Opens a file for I/O operations
<code>__orderInterrupt</code>	Generates an interrupt
<code>__popSimulatorInterruptExecutingStack</code>	Informs the interrupt simulation system that an interrupt handler has finished executing
<code>__readFile</code>	Reads from the specified file
<code>__readFileByte</code>	Reads one byte from the specified file
<code>__readMemory8,</code> <code>__readMemoryByte</code>	Reads one byte from the specified memory location
<code>__readMemory16</code>	Reads two bytes from the specified memory location
<code>__readMemory32</code>	Reads four bytes from the specified memory location
<code>__registerMacroFile</code>	Registers macros from the specified file
<code>__resetFile</code>	Rewinds a file opened by <code>__openFile</code>
<code>__setCodeBreak</code>	Sets a code breakpoint
<code>__setDataBreak</code>	Sets a data breakpoint
<code>__setSimBreak</code>	Sets a simulation breakpoint
<code>__sourcePosition</code>	Returns the file name and source location if the current execution location corresponds to a source location
<code>__strFind</code>	Searches a given string for the occurrence of another string
<code>__subString</code>	Extracts a substring from another string

Table 84: Summary of system macros

Macro	Description
__toLower	Returns a copy of the parameter string where all the characters have been converted to lower case
__toString	Prints strings
__toUpper	Returns a copy of the parameter string where all the characters have been converted to upper case
__writeFile	Writes to the specified file
__writeFileByte	Writes one byte to the specified file
__writeMemoryByte	Writes one byte to the specified memory location
__writeMemory8	Writes one byte to the specified memory location
__writeMemory16	Writes a two-byte word to the specified memory location
__writeMemory32	Writes a four-byte word to the specified memory location

Table 84: Summary of system macros (Continued)

Description of C-SPY system macros

This section gives reference information about each of the C-SPY system macros.

__cancelAllInterrupts

Syntax	__cancelAllInterrupts()
Return value	int 0
Description	Cancels all ordered interrupts.
Applicability	This system macro is only available in IAR C-SPY Simulator.

__cancelInterrupt

Syntax

`__cancelInterrupt(interrupt_id)`

Parameter

`interrupt_id`

The value returned by the corresponding
__orderInterrupt macro call (unsigned long)

Return value

Result	Value
Successful	int 0
Unsuccessful	Non-zero error number

Table 85: __cancelInterrupt return values

Description

Cancels the specified interrupt.

Applicability

This system macro is only available in IAR C-SPY Simulator.

__clearBreak

Syntax

`__clearBreak(break_id)`

Parameter

`break_id`

The value returned by any of the set breakpoint macros

Return value

int 0

Description

Clears a user-defined breakpoint.

See also

Defining breakpoints, page 129.

__closeFile

Syntax

`__closeFile(filehandle)`

Parameter

`filehandle`

The macro variable used as filehandle by the __openFile macro

Return value

int 0

Description

Closes a file previously opened by __openFile.

__disableInterrupts

Syntax `__disableInterrupts()`

Return value

Result	Value
Successful	int 0
Unsuccessful	Non-zero error number

Table 86: __disableInterrupts return values

Description Disables the generation of interrupts.

Applicability This system macro is only available in IAR C-SPY Simulator.

__driverType

Syntax `__driverType(driver_id)`

Parameter

driver_id A string corresponding to the driver you want to check for; for a list of supported strings, see the online help system available from the **Help** menu

Return value

Result	Value
Successful	1
Unsuccessful	0

Table 87: __driverType return values

Description Checks to see if the current IAR C-SPY Debugger driver is identical to the driver type of the *driver_id* parameter.

Example

`__driverType("sim")`

If a simulator is the current driver, the value 1 is returned. Otherwise 0 is returned.

__enableInterrupts

Syntax `__enableInterrupts()`

Return value

Result	Value
Successful	int 0
Unsuccessful	Non-zero error number

Table 88: __enableInterrupts return values

Description

Enables the generation of interrupts.

Applicability

This system macro is only available in IAR C-SPY Simulator.

__evaluate

Syntax `__evaluate(string, valuePtr)`

Parameter

<i>string</i>	Expression string
<i>valuePtr</i>	Pointer to a macro variable storing the result

Return value

Result	Value
Successful	int 0
Unsuccessful	int 1

Table 89: __evaluate return values

Description

This macro interprets the input string as an expression and evaluates it. The result is stored in a variable pointed to by *valuePtr*.

Example

The following example assumes that the variable *i* is defined and has the value 5:

`__evaluate("i + 3", &myVar)`

The macro variable *myVar* is assigned the value 8.

__openFile

Syntax `__openFile(file, access)`

Parameters

<i>file</i>	The filename as a string
<i>access</i>	The access type (string). These are mandatory but mutually exclusive: "a" append, new data will be appended at the end of the open file "r" read "w" write These are optional and mutually exclusive: "b" binary, opens the file in binary mode "t" ASCII text, opens the file in text mode This access type is optional: "+" together with r, w, or a; r+ or w+ is <i>read</i> and <i>write</i> , while a+ is <i>read</i> and <i>append</i>

Return value

Result	Value
Successful	The file handle
Unsuccessful	An invalid file handle, which tests as False

Table 90: __openFile return values

Description

Opens a file for I/O operations. The default base directory of this macro is where the currently open project file (*.pew or *.prj) is located. The argument to __openFile can specify a location relative to this directory. In addition, you can use argument variables such as \$PROJ_DIR\$ and \$TOOLKIT_DIR\$ in the path argument.

Example

```
__var filehandle;          /* The macro variable to contain */
                           /* the file handle */
filehandle = __openFile("Debug\\Exe\\test.tst", "r");
if (filehandle)
{
    /* successful opening */
}
```

See also

Argument variables summary, page 233.

__orderInterrupt

Syntax	<pre>__orderInterrupt(<i>specification</i>, <i>first_activation</i>, <i>repeat_interval</i>, <i>variance</i>, <i>infinite_hold_time</i>, <i>hold_time</i>, <i>probability</i>)</pre>															
Parameters	<table><tr><td><i>specification</i></td><td>The interrupt (string). The specification can either be the full specification used in the device description file (ddf) or only the name. In the latter case the interrupt system will automatically get the description from the device description file.</td></tr><tr><td><i>first_activation</i></td><td>The first activation time in cycles (integer)</td></tr><tr><td><i>repeat_interval</i></td><td>The periodicity in cycles (integer)</td></tr><tr><td><i>variance</i></td><td>The timing variation range in percent (integer between 0 and 100)</td></tr><tr><td><i>infinite_hold_time</i></td><td>1 if infinite, otherwise 0.</td></tr><tr><td><i>hold_time</i></td><td>The hold time (integer)</td></tr><tr><td><i>probability</i></td><td>The probability in percent (integer between 0 and 100)</td></tr></table>	<i>specification</i>	The interrupt (string). The specification can either be the full specification used in the device description file (ddf) or only the name. In the latter case the interrupt system will automatically get the description from the device description file.	<i>first_activation</i>	The first activation time in cycles (integer)	<i>repeat_interval</i>	The periodicity in cycles (integer)	<i>variance</i>	The timing variation range in percent (integer between 0 and 100)	<i>infinite_hold_time</i>	1 if infinite, otherwise 0.	<i>hold_time</i>	The hold time (integer)	<i>probability</i>	The probability in percent (integer between 0 and 100)	
<i>specification</i>	The interrupt (string). The specification can either be the full specification used in the device description file (ddf) or only the name. In the latter case the interrupt system will automatically get the description from the device description file.															
<i>first_activation</i>	The first activation time in cycles (integer)															
<i>repeat_interval</i>	The periodicity in cycles (integer)															
<i>variance</i>	The timing variation range in percent (integer between 0 and 100)															
<i>infinite_hold_time</i>	1 if infinite, otherwise 0.															
<i>hold_time</i>	The hold time (integer)															
<i>probability</i>	The probability in percent (integer between 0 and 100)															
Return value	<p>The macro returns an interrupt identifier (unsigned long).</p> <p>If the syntax of <i>specification</i> is incorrect, it returns -1.</p>															
Description	Generates an interrupt.															
Applicability	This system macro is only available in IAR C-SPY Simulator.															
Example	<p>The following example generates a repeating interrupt using an infinite hold time first activated after 4000 cycles:</p> <pre>__orderInterrupt("USARTR_VECTOR", 4000, 2000, 0, 1, 0, 100);</pre>															

__popSimulatorInterruptExecutingStack

Syntax	<pre>__popSimulatorInterruptExecutingStack(void)</pre>	
Return value	This macro has no return value.	
Description	<p>Informs the interrupt simulation system that an interrupt handler has finished executing, as if the normal instruction used for returning from an interrupt handler was executed.</p>	

This is useful if you are using interrupts in such a way that the normal instruction for returning from an interrupt handler is not used, for example in an operating system with task-switching. In this case, the interrupt simulation system cannot automatically detect that the interrupt has finished executing.

Applicability This system macro is only available in IAR C-SPY Simulator.

__readFile

Syntax `__readFile(file, valuePtr)`

Parameters

<i>file</i>	A file handle
<i>valuePtr</i>	A pointer to a variable

Return value	Result	Value
	Successful	0
	Unsuccessful	Non-zero error number

Table 91: __readFile return values

Description Reads a sequence of hexadecimal digits from the given file and converts them to an unsigned long which is assigned to the *value* parameter, which should be a pointer to a macro variable.

Example

```
__var number;
if (__readFile(myFile, &number) == 0)
{
    // Do something with number
}
```

__readFileByte

Syntax `__readFileByte(file)`

Parameter

<i>file</i>	A file handle
-------------	---------------

Return value -1 upon error or end-of-file, otherwise a value between 0 and 255.

Description Reads one byte from the file *file*.

Example

```
__var byte;
while ( (byte = __readFileByte(myFile)) != -1 )
{
    // Do something with byte
}
```

__readMemory8, __readMemoryByte

Syntax	<pre>__readMemory8(address, zone) __readMemoryByte(address, zone)</pre>	
Parameters	<div> <div>address</div> <div>The memory address (integer)</div> </div> <div> <div>zone</div> <div>The memory zone name (string); for a list of available zones, see <i>Memory addressing</i>, page 137</div> </div>	
Return value	The macro returns the value from memory.	
Description	Reads one byte from a given memory location.	
Example	<pre>__readMemory8(0x0108, "Memory");</pre>	

__readMemory16

Syntax	<pre>__readMemory16(address, zone)</pre>	
Parameters	<div> <div>address</div> <div>The memory address (integer)</div> </div> <div> <div>zone</div> <div>The memory zone name (string); for a list of available zones, see <i>Memory addressing</i>, page 137</div> </div>	
Return value	The macro returns the value from memory.	
Description	Reads a two-byte word from a given memory location.	
Example	<pre>__readMemory16(0x0108, "Memory");</pre>	

__readMemory32

Syntax	<code>__readMemory32(<i>address</i>, <i>zone</i>)</code>	
Parameters	<i>address</i>	The memory address (integer)
	<i>zone</i>	The memory zone name (string); for a list of available zones, see <i>Memory addressing</i> , page 137
Return value	The macro returns the value from memory.	
Description	Reads a four-byte word from a given memory location.	
Example	<code>__readMemory32(0x0108, "Memory");</code>	

__registerMacroFile

Syntax	<code>__registerMacroFile(<i>filename</i>)</code>	
Parameter	<i>filename</i>	A file containing the macros to be registered (string)
Return value	<code>int 0</code>	
Description	Registers macros from a setup macro file. With this function you can register multiple macro files during C-SPY startup.	
Example	<code>__registerMacroFile("c:\\testdir\\macro.mac");</code>	
See also	<i>Registering and executing using setup macros and setup files</i> , page 147.	

__resetFile

Syntax	<code>__resetFile(<i>filehandle</i>)</code>	
Parameter	<i>filehandle</i>	The macro variable used as filehandle by the <code>__openFile</code> macro
Return value	<code>int 0</code>	

Description Rewinds a file previously opened by `__openFile`.

__setCodeBreak

Syntax `__setCodeBreak(location, count, condition, cond_type, action)`

Parameters

<i>location</i>	A string with a location description. This can be either: A source location on the form <i>{filename}.line.col</i> (for example <i>{D:\\src\\prog.c}.12.9</i>) An absolute location on the form <i>zone:hexaddress</i> or simply <i>hexaddress</i> (for example <i>Memory:0x42</i>) An expression whose value designates a location (for example <i>main</i>)
<i>count</i>	The number of times that a breakpoint condition must be fulfilled before a break occurs (integer)
<i>condition</i>	The breakpoint condition (string)
<i>cond_type</i>	The condition type; either "CHANGED" or "TRUE" (string)
<i>action</i>	An expression, typically a call to a macro, which is evaluated when the breakpoint is detected

Return value

Result	Value
Successful	An unsigned integer uniquely identifying the breakpoint. This value must be used to clear the breakpoint.
Unsuccessful	0

Table 92: `__setCodeBreak` return values

Description Sets a code breakpoint, that is, a breakpoint which is triggered just before the processor fetches an instruction at the specified location.

Examples `__setCodeBreak("{D:\\src\\prog.c}.12.9", 3, "d>16", "TRUE", "ActionCode()");`

The following example sets a code breakpoint on the label `main` in your source:

`__setCodeBreak("main", 0, "1", "TRUE", "");`

See also *Defining breakpoints*, page 129.

__setDataBreak

Syntax	__setDataBreak(<i>location</i> , <i>count</i> , <i>condition</i> , <i>cond_type</i> , <i>access</i> , <i>action</i>)	
Parameters	<i>location</i>	<p>A string with a location description. This can be either:</p> <p>A <i>source location</i> on the form {<i>filename</i>}.<i>line.col</i> (for example {D:\\src\\prog.c}.12.9), although this is not very useful for data breakpoints</p> <p>An <i>absolute location</i> on the form <i>zone:hexaddress</i> or simply <i>hexaddress</i> (for example Memory:0x42)</p> <p>An <i>expression</i> whose value designates a location (for example my_global_variable).</p>
	<i>count</i>	The number of times that a breakpoint condition must be fulfilled before a break occurs (integer)
	<i>condition</i>	The breakpoint condition (string)
	<i>cond_type</i>	The condition type; either "CHANGED" or "TRUE" (string)
	<i>access</i>	The memory access type: "R" for read, "W" for write, or "RW" for read/write
	<i>action</i>	An expression, typically a call to a macro, which is evaluated when the breakpoint is detected

Return value

Result	Value
Successful	An unsigned integer uniquely identifying the breakpoint. This value must be used to clear the breakpoint.
Unsuccessful	0

Table 93: __setDataBreak return values

Description	Sets a data breakpoint, that is, a breakpoint which is triggered directly after the processor has read or written data at the specified location.
Applicability	This system macro is only available in IAR C-SPY Simulator.
Example	<pre>__var brk; brk = __setDataBreak("Memory:0x4710", 3, "d>6", "TRUE", "W", "ActionData()"); ...</pre>

`__clearBreak(brk);`

See also *Defining breakpoints*, page 129.

__setSimBreak

Syntax `__setSimBreak(location, access, action)`

Parameters

<i>location</i>	A string with a location description. This can be either: A <i>source location</i> on the form {filename}.line.col (for example {D:\src\prog.c}.12.9), although this is not very useful for simulation breakpoints. An <i>absolute location</i> on the form zone:hexaddress or simply hexaddress (for example Memory:0xE01E). An <i>expression</i> whose value designates a location (for example my_global_variable).
<i>access</i>	The memory access type: "R" for read or "W" for write
<i>action</i>	An expression, typically a call to a macro function, which is evaluated when the breakpoint is detected

Return value

Result	Value
Successful	An unsigned integer uniquely identifying the breakpoint. This value must be used to clear the breakpoint.
Unsuccessful	0

Table 94: __setSimBreak return values

Description

Use this system macro to set *immediate* breakpoints, which will halt instruction execution only temporarily. This allows a C-SPY macro function to be called when the processor is about to read data from a location or immediately after it has written data. Instruction execution will resume after the action.

This type of breakpoint is useful for simulating memory-mapped devices of various kinds (for instance serial ports and timers). When the processor reads at a memory-mapped location, a C-SPY macro function can intervene and supply the appropriate data. Conversely, when the processor writes to a memory-mapped location, a C-SPY macro function can act on the value that was written.

Applicability

This system macro is only available in the IAR C-SPY Simulator.

__sourcePosition

Syntax	<code>__sourcePosition(<i>linePtr</i>, <i>colPtr</i>)</code>	
Parameters	<i>linePtr</i>	Pointer to the variable storing the line number
	<i>colPtr</i>	Pointer to the variable storing the column number
Return value	Result	Value
	Successful	Filename string
	Unsuccessful	Empty (" ") string
Table 95: __sourcePosition return values		
Description	If the current execution location corresponds to a source location, this macro returns the filename as a string. It also sets the value of the variables, pointed to by the parameters, to the line and column numbers of the source location.	

__strFind

Syntax	<code>__strFind(<i>macroString</i>, <i>pattern</i>, <i>position</i>)</code>	
Parameters	<i>macroString</i>	The macro string to search in
	<i>pattern</i>	The string pattern to search for
	<i>position</i>	The position where to start the search. The first position is 0
Return value	The position where the pattern was found or -1 if the string is not found.	
Description	This macro searches a given string for the occurrence of another string.	
Example	<code>__strFind("Compiler", "pile", 0) = 3</code> <code>__strFind("Compiler", "foo", 0) = -1</code>	
See also	Macro strings, page 362.	

__subString

Syntax	<code>__subString(<i>macroString</i>, <i>position</i>, <i>length</i>)</code>	
Parameters	<i>macroString</i>	The macro string from which to extract a substring
	<i>position</i>	The start position of the substring. The first position is 0.
	<i>length</i>	The length of the substring
Return value	A substring extracted from the given macro string.	
Description	This macro extracts a substring from another string.	
Example	<code>__subString("Compiler", 0, 2)</code> The resulting macro string contains Co. <code>__subString("Compiler", 3, 4)</code> The resulting macro string contains pile.	
See also	<i>Macro strings</i> , page 362.	

__toLower

Syntax	<code>__toLower(<i>macroString</i>)</code>	
Parameter	<i>macroString</i>	is any macro string.
Return value	The converted macro string.	
Description	This macro returns a copy of the parameter string where all the characters have been converted to lower case.	
Example	<code>__toLower("IAR")</code> The resulting macro string contains iar. <code>__toLower("Mix42")</code> The resulting macro string contains mix42.	
See also	<i>Macro strings</i> , page 362.	

__toString

Syntax	<code>__toString(C_string, maxlength)</code>	
Parameter	<i>string</i>	Any null-terminated C string
	<i>maxlength</i>	The maximum length of the returned macro string
Return value	Macro string.	
Description	This macro is used for converting C strings (<code>char*</code> or <code>char[]</code>) into macro strings.	
Example	Assuming your application contains the following definition:	
	<code>char const * hpstr = "Hello World!";</code>	
	the following macro call:	
	<code>__toString(hpstr, 5)</code>	
	would return the macro string containing <code>Hello</code> .	
See also	<i>Macro strings</i> , page 362.	

__ToUpper

Syntax	<code>__ToUpper(macroString)</code>	
Parameter	<i>macroString</i> is any macro string.	
Return value	The converted string.	
Description	This macro returns a copy of the parameter <i>macroString</i> where all the characters have been converted to upper case.	
Example	<code>__ToUpper("string")</code>	
	The resulting macro string contains <code>STRING</code> .	
See also	<i>Macro strings</i> , page 362.	

__writeFile

Syntax	__writeFile(<i>file</i> , <i>value</i>)	
Parameters	<i>file</i>	A file handle
	<i>value</i>	An integer
Return value	int 0	
Description	Prints the integer value in hexadecimal format (with a trailing space) to the file <i>file</i> . Note: The __fmessage statement can do the same thing. The __writeFile macro is provided for symmetry with __readFile.	

__writeFileByte

Syntax	__writeFileByte(<i>file</i> , <i>value</i>)	
Parameters	<i>file</i>	A file handle
	<i>value</i>	An integer in the range 0-255
Return value	int 0	
Description	Writes one byte to the file <i>file</i> .	

__writeMemoryByte

Syntax	__writeMemoryByte(<i>value</i> , <i>address</i> , <i>zone</i>)	
Parameters	<i>value</i>	The value to be written (integer)
	<i>address</i>	The memory address (integer)
	<i>zone</i>	The memory zone name (string); for a list of available zones, see <i>Memory addressing</i> , page 137
Return value	int 0	
Description	Writes one byte to a given memory location.	

Example `__writeMemoryByte(0x2F, 0x1F, "Memory");`

__writeMemory8

Syntax `__writeMemory8(value, address, zone)`

Parameters

<i>value</i>	The value to be written (integer)
<i>address</i>	The memory address (integer)
<i>zone</i>	The memory zone name (string); for a list of available zones, see <i>Memory addressing</i> , page 137

Return value `int 0`

Description Writes one byte to a given memory location.

Example `__writeMemory8(0x2F, 0x8020, "Memory");`

__writeMemory16

Syntax `__writeMemory16(value, address, zone)`

Parameters

<i>value</i>	The value to be written (integer)
<i>address</i>	The memory address (integer)
<i>zone</i>	The memory zone name (string); for a list of available zones, see <i>Memory addressing</i> , page 137

Return value `int 0`

Description Writes two bytes to a given memory location.

Example `__writeMemory16(0x2FFF, 0x8020, "Memory");`

__writeMemory32

Syntax	<code>__writeMemory32(value, address, zone)</code>	
Parameters	<i>value</i>	The value to be written (integer)
	<i>address</i>	The memory address (integer)
	<i>zone</i>	The memory zone name (string); for a list of available zones, see <i>Memory addressing</i> , page 137
Return value	<code>int 0</code>	
Description	Writes four bytes to a given memory location.	

Example

```
__writeMemory32(0x5555FFFF, 0x8020, "Memory");
```


Glossary

A

Absolute location

A specific memory address for an object specified in the source code, as opposed to the object being assigned a location by the IAR XLINK Linker.

Absolute segments

Segments that have fixed locations in memory before linking.

Address expression

An expression which has an address as its value.

Application

The program developed by the user of the IAR Systems toolkit and which will be run as an embedded application on a target processor.

Architecture

A term used by computer designers to designate the structure of complex information-processing systems. It includes the kinds of instructions and data used, the memory organization and addressing, and the methods by which the system is implemented. The two main architecture types used in processor design are *Harvard architecture* and *von Neumann architecture*.

Assembler directives

The set of commands that control how the assembler operates.

Assembler options

Parameters you can specify to change the default behavior of the assembler.

Assembler language

A machine-specific set of mnemonics used to specify operations to the target processor and input or output registers or data areas. Assembler language might sometimes be preferred over C/Embedded C++ to save memory or to enhance the execution speed of the application.

Auto variables

The term refers to the fact that each time the function in which the variable is declared is called, a new instance of the variable is created automatically. This can be compared with the behavior of local variables in systems using static overlay, where a local variable only exists in one instance, even if the function is called recursively. Also called local variables. Compare *Register variables*.

B

Backtrace

Information that allows the IAR C-SPY® Debugger to show, without any runtime penalty, the complete stack of function calls wherever the program counter is, provided that the code comes from compiled C functions.

Bank

See *Memory bank*.

Bank switching

Switching between different sets of memory banks. This software technique is used to increase a computer's usable memory by allowing different pieces of memory to occupy the same address space.

Banked code

Code that is distributed over several banks of memory. Each function must reside in only one bank.

Banked data

Data that is distributed over several banks of memory. Each data object must fit inside one memory bank.

Banked memory

Has multiple storage locations for the same address. See also *Memory bank*.

Bank-switching routines

Code that selects a memory bank.

Batch files

A text file containing operating system commands which are executed by the command line interpreter. In Unix, this is called a “shell script” because it is the Unix shell which includes the command line interpreter. Batch files can be used as a simple way to combine existing commands into new commands.

Bitfield

A group of bits considered as a unit.

Breakpoint

1. Code breakpoint. A point in a program that, when reached, triggers some special behavior useful to the process of debugging. Generally, breakpoints are used for stopping program execution or dumping the values of some or all of the program variables. Breakpoints can be part of the program itself, or they can be set by the programmer as part of an interactive session with a debugging tool for scrutinizing the program's execution.

2. Data breakpoint. A point in memory that, when accessed, triggers some special behavior useful to the process of debugging. Generally, data breakpoints are used to stop program execution when an address location is accessed either by a read operation or a write operation.

3. Immediate breakpoint. A point in memory that, when accessed, trigger some special behavior useful in the process of debugging. Immediate breakpoints are generally used for halting the program execution in the middle of a memory access instruction (before or after the actual memory access depending on the access type) while performing some user-specified action. The execution is then resumed. This feature is only available in the simulator version of C-SPY.

C

Calling convention

A calling convention describes the way one function in a program calls another function. This includes how register parameters are handled, how the return value is returned, and which registers that will be preserved by the called function. The compiler handles this automatically for all C and C++

functions. All code written in assembler language must conform to the rules in the calling convention in order to be callable from C or C++, or to be able to call C and C++ functions. The C calling convention and the C++ calling conventions are not necessarily the same.

Cheap

As in *cheap memory access*. A cheap memory access either requires few cycles to perform, or few bytes of code to implement. A cheap memory access is said to have a low cost. See *Memory access cost*.

Checksum

A computed value which depends on the contents of a block of data and which is stored along with the data in order to detect corruption of the data. Compare *CRC (cyclic redundancy checking)*.

Code banking

See *Banked code*.

Code model

The code model controls how code is generated for an application. Typically, the code model controls behavior such as how functions are called and in which code segment functions will be located. All object files of an application must be compiled using the same code model.

Code pointers

A code pointer is a function pointer. As many microcontrollers allow several different methods of calling a function, compilers for embedded systems usually provide the users with the ability to use all these methods.

Do not confuse code pointers with data pointers.

Compilation unit

See *Translation unit*.

Compiler function directives

The compiler function directives are generated by the compiler to pass information about functions and function calls to the IAR XLINK Linker. To view these directives, you must create an assembler list file. These directives are primarily intended for compilers that support static overlay, a feature which is useful in smaller microcontrollers.

Compiler options

Parameters you can specify to change the default behavior of the compiler.

Cost

See *Memory access cost*.

CRC (cyclic redundancy checking)

A number derived from, and stored with, a block of data in order to detect corruption. A CRC is based on polynomials and is a more advanced way of detecting errors than a simple arithmetic checksum. Compare *Checksum*.

C-SPY options

Parameters you can specify to change the default behavior of the IAR C-SPY Debugger.

Cstartup

Code that sets up the system before the application starts executing.

C-style preprocessor

A preprocessor is either a stand-alone application or an integrated part of a compiler, that performs preprocessing of the input stream before actual compilation takes place. A C-style preprocessor follows the rules set up in the ANSI specification of the C language and implements commands like `#define`, `#if`, and `#include`, which are used to handle textual macro substitution, conditional compilation, and inclusion of other files.

D**Data banking**

See *Banked data*.

Data model

The data model specifies the default memory type. This means that the data model typically controls one or more of the following: The method used and the code generated to access static and global variables, dynamically allocated data, and the runtime stack. It also controls the default pointer type and in which data segments static and global variables will be located. A project can only use one data model at a time, and the same model must be used by all user modules and all library modules in the project.

Data pointers

Many microcontrollers have different addressing modes in order to access different memory types or address spaces. Compilers for embedded systems usually have a set of different data pointer types so they can access the available memory efficiently.

Data representation

How different data types are laid out in memory and what value ranges they represent.

Declaration

A specification to the compiler that an object, a variable or function, exists. The object itself must be defined in exactly one translation unit (source file). An object must either be declared or defined before it is used. Normally an object that is used in many files is defined in one source file. A declaration is normally placed in a header file that is included by the files that use the object.

For example:

```
/* Variable "a" exists somewhere. Function
   "b" takes two int parameters and returns an
   int. */

extern int a;
int b(int, int);
```

Definition

The variable or function itself. Only one definition can exist for each variable or function in an application. See also *Tentative definition*.

For example:

```
int a;
int b(int x, int y)
{
    return x + y;
}
```

Derivative

One of two or more processor variants in a series or family of microprocessors or microcontrollers.

Device description file

A file used by the IAR C-SPY Debugger that contains various device-specific information such as I/O registers (SFR) definitions, interrupt vectors, and control register definitions.

Device driver

Software that provides a high-level programming interface to a particular peripheral device.

Digital signal processor (DSP)

A device that is similar to a microprocessor, except that the internal CPU has been optimized for use in applications involving discrete-time signal processing. In addition to standard microprocessor instructions, digital signal processors usually support a set of complex instructions to perform common signal-processing computations quickly.

Disassembly window

A C-SPY window that shows the memory contents disassembled as machine instructions, interspersed with the corresponding C source code (if available).

Dynamic initialization

Variables in a program written in C are initialized during the initial phase of execution, before the main function is called. These variables are always initialized with a static value, which is determined either at compile-time or at link-time. This is called static initialization. In Embedded C++, variables might require initialization to be performed by executing code, for example, running the constructor of global objects, or performing dynamic memory allocation.

Dynamic memory allocation

There are two main strategies for storing variables: statically at link-time, or dynamically at runtime. Dynamic memory allocation is often performed from the heap and it is the size of the heap that determines how much memory that can be used for dynamic objects and variables. The advantage of dynamic memory allocation is that several variables or objects that are not active at the same time can be stored in the same memory, thus reducing the memory need of an application. See also *Heap memory*.

Dynamic object

An object that is allocated, created, destroyed, and released at runtime. Dynamic objects are almost always stored in memory that is dynamically allocated. Compare *Static object*.

E

EEPROM

Electrically Erasable, Programmable Read-Only Memory. A type of ROM that can be erased electronically, and then be re-programmed.

EPROM

Erasable, Programmable Read-Only Memory. A type of ROM that can be erased by exposing it to ultraviolet light, and then be re-programmed.

Embedded C++

A subset of the C++ programming language, which is intended for embedded systems programming. The fact that performance and portability are particularly important in embedded systems development was considered when defining the language.

Embedded system

A combination of hardware and software, designed for a specific purpose. Embedded systems are often part of a larger system or product.

Emulator

An emulator is a hardware device that performs emulation of one or more derivatives of a processor family. An emulator can often be used instead of the actual microcontroller and connects directly to the printed circuit board—where the microcontroller would have been connected—via a connecting device. An emulator always behaves exactly as the processor it emulates, and is used when debugging requires all systems actuators, or when debugging device drivers.

Enumeration

A type which includes in its definition an exhaustive list of possible values for variables of that type. Common examples include Boolean, which takes values from the list [true, false], and day-of-week which takes values [Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday]. Enumerated types are a feature of typed languages, including C and Ada.

Characters, (fixed-size) integers, and even floating-point types might be (but are not usually) considered to be (large) enumerated types.

Exceptions

An exception is an interrupt initiated by the processor hardware, or hardware that is tightly coupled with the processor, for instance, a memory management unit (MMU). The exception signals a violation of the rules of the architecture (access to protected memory), or an extreme error condition (division by zero).

Do not confuse this use of the word exception with the term *exception* used in the C++ language (but not in Embedded C++).

Expensive

As in *expensive memory access*. An expensive memory access either requires many cycles to perform, or many bytes of code to implement. An expensive memory access is said to have a high cost. See *Memory access cost*.

Extended keywords

Non-standard keywords in C and C++. These usually control the definition and declaration of objects (that is, data and functions). See also *Keywords*.

F**Format specifiers**

Used to specify the format of strings sent by library functions such as printf. In the following example, the function call contains one format string with one format specifier, %c, that prints the value of a as a single ASCII character:

```
printf("a = %c", a);
```

G**General options**

Parameters you can specify to change the default behavior of all tools that are included in the IAR Embedded Workbench IDE.

Generic pointers

Pointers that have the ability to point to all different memory types in, for example, a microcontroller based on the Harvard architecture.

H**Harvard architecture**

A microcontroller based on the Harvard architecture has separate data and instruction buses. This allows execution to occur in parallel. As an instruction is being fetched, the current instruction is executing on the data bus. Once the current instruction is complete, the next instruction is ready to go. This theoretically allows for much faster execution than a von Neumann architecture, but there is some added silicon complexity. Compare *von Neumann architecture*.

Heap memory

The heap is a pool of memory in a system that is reserved for dynamic memory allocation. An application can request parts of the heap for its own use; once memory has been allocated from the heap it remains valid until it is explicitly released back to the heap by the application. This type of memory is

useful when the number of objects is not known until the application executes. Note that this type of memory is risky to use in systems with a limited amount of memory or systems that are expected to run for a very long time.

Heap size

Total size of memory that can be dynamically allocated.

Host

The computer that communicates with the target processor. The term is used to distinguish the computer on which the debugger is running from the microcontroller the embedded application you develop runs on.

I

IDE (integrated development environment)

A programming environment with all necessary tools integrated into one single application.

Include file

A text file which is included into a source file. This is often performed by the preprocessor.

Inline assembler

Assembler language code that is inserted directly between C statements.

Inlining

An optimization that replaces function calls with the body of the called function. This optimization increases the execution speed and can even reduce the size of the generated code.

Instruction mnemonics

A word or acronym used in assembler language to represent a machine instruction. Different processors have different instruction sets and therefore use a different set of mnemonics to represent them, such as, ADD, BR (branch), BLT (branch if less than), MOVE, LDR (load register).

Interrupt vector

A small piece of code that will be executed, or a pointer that points to code that will be executed when an interrupt occurs.

Interrupt vector table

A table containing interrupt vectors, indexed by interrupt type. This table contains the processor's mapping between interrupts and interrupt service routines and must be initialized by the programmer.

Interrupts

In embedded systems, the use of interrupts is a method of detecting external events immediately, for example a timer overflow or the pressing of a button.

Interrupts are asynchronous events that suspend normal processing and temporarily divert the flow of control through an “interrupt handler” routine. Interrupts can be caused by both hardware (I/O, timer, machine check) and software (supervisor, system call or trap instruction). Compare *Trap*.

Intrinsic

An adjective describing native compiler objects, properties, events, and methods.

Intrinsic functions

1. Function calls that are directly expanded into specific sequences of machine code. 2. Functions called by the compiler for internal purposes (that is, floating point arithmetic etc.).

K

Key bindings

Key shortcuts for menu commands used in the IAR Embedded Workbench IDE.

Keywords

A fixed set of symbols built into the syntax of a programming language. All keywords used in a language are reserved—they cannot be used as identifiers (in other words, user-defined objects such as variables or procedures). See also *Extended keywords*.

L

L-value

A value that can be found on the left side of an assignment and thus be changed. This includes plain variables and de-referenced pointers. Expressions like $(x + 10)$ cannot be assigned a new value and are therefore not L-values.

Language extensions

Target-specific extensions to the C language.

Library

See *Runtime library*.

Linker command file

A file used by the IAR XLINK Linker. It contains command line options which specify the locations where the memory segments can be placed, thereby assuring that your application fits on the target chip.

Because many of the chip-specific details are specified in the linker command file and not in the source code, the linker command file also helps to make the code portable.

In particular, the linker specifies the placement of segments, the stack size, and the heap size.

Local variable

See *Auto variables*.

Location counter

See *Program location counter (PLC)*.

Logical address

See *Virtual address (logical address)*.

M

MAC (Multiply and accumulate)

A special instruction, or on-chip device, that performs a multiplication together with an addition. This is very useful when performing signal processing where many filters and transforms have the form:

$$y_j = \sum_{i=0}^N c_i \cdot x_{i+j}$$

The accumulator of the MAC usually has a higher precision (more bits) than normal registers. See also *Digital signal processor (DSP)*.

Macro

1. Assembler macros are user-defined sets of assembler lines that can be expanded later in the source file by referring to the given macro name. Parameters will be substituted if referred to.
2. C macro. A text substitution mechanism used during preprocessing of source files. Macros are defined using the `#define` preprocessing directive. The replacement text of each macro is then substituted for any occurrences of the macro name in the rest of the translation unit.
3. C-SPY macros are programs that you can write to enhance the functionality of the IAR C-SPY Debugger. A typical application of C-SPY macros is to associate them with breakpoints; when such a breakpoint is hit, the macro is run and can for example be used to simulate peripheral devices, to evaluate complex conditions, or to output a trace.

The C-SPY macro language is like a simple dialect of C, but is less strict with types.

Mailbox

A mailbox in an RTOS is a point of communication between two or more tasks. One task can send messages to another task by placing the message in the mailbox of the other task. Mailboxes are also known as message queues or message ports.

Memory access cost

The cost of a memory access can be in clock cycles, or in the number of bytes of code needed to perform the access. A memory which requires large instructions or many instructions is said to have a higher access cost than a memory which can be accessed with few, or small instructions.

Memory area

A region of the memory.

Memory bank

The smallest unit of continuous memory in banked memory. One memory bank at a time is visible in a microcontroller's physical address space.

Memory map

A map of the different memory areas available to the microcontroller.

Memory model

Specifies the memory hierarchy and how much memory the system can handle. Your application must use only one memory model at a time, and the same model must be used by all user modules and all library modules.

Microcontroller

A microprocessor on a single integrated circuit intended to operate as an embedded system. As well as a CPU, a microcontroller typically includes small amounts of RAM, PROM, timers, and I/O ports.

Microprocessor

A CPU contained on one (or a small number of) integrated circuits. A single-chip microprocessor can include other components such as memory, memory management, caches, floating-point unit, I/O ports and timers. Such devices are also known as microcontrollers.

Module

The basic unit of linking. A module contains definitions for symbols (exports) and references to external symbols (imports). When compiling C/C++, each translation unit produces one module. In assembler, each source file can produce more than one module.

N

Nested interrupts

A system where an interrupt can be interrupted by another interrupt is said to have nested interrupts.

Non-banked memory

Has a single storage location for each memory address in a microcontroller's physical address space.

Non-initialized memory

Memory that can contain any value at reset, or in the case of a soft reset, can remember the value it had before the reset.

Non-volatile storage

Memory devices such as battery-backed RAM, ROM, magnetic tape and magnetic disks that can retain data when electric power is shut off. Compare *Volatile storage*.

NOP

No operation. This is an instruction that does not perform anything, but is used to create a delay. In pipelined architectures, the NOP instruction can be used for synchronizing the pipeline. See also *Pipeline*.

O

Operator

A symbol used as a function, with infix syntax if it has two arguments (+, for example) or prefix syntax if it has only one (for instance, bitwise negation, ~). Many languages use operators for built-in functions such as arithmetic and logic.

Operator precedence

Each operator has a precedence number assigned to it that determines the order in which the operator and its operands are evaluated. The highest precedence operators are evaluated first. Use parentheses to group operators and operands to control the order in which the expressions are evaluated.

P

Parameter passing

See *Calling convention*.

Peripheral

A hardware component other than the processor, for example memory or an I/O device.

Pipeline

A structure that consists of a sequence of stages through which a computation flows. New operations can be initiated at the start of the pipeline even though other operations are already in progress through the pipeline.

Pointer

An object that contains an address to another object of a specified type.

#pragma

During compilation of a C/C++ program, the `#pragma` preprocessing directive causes the compiler to behave in an implementation-defined manner. This can include, for example, producing output on the console, changing the declaration of a subsequent object, changing the optimization level, or enabling/disabling language extensions.

Pre-emptive multitasking

An RTOS task is allowed to run until a higher priority process is activated. The higher priority task might become active as the result of an interrupt. The term preemptive indicates that although a task is allotted to run a given length of time (a timeslice), it might lose the processor at any time. Each time an interrupt occurs, the task scheduler looks for the highest priority task that is active and switches to that task. If the located task is different from the task that was executing before the interrupt, the previous task is suspended at the point of interruption.

Compare *Round Robin*.

Preprocessing directives

A set of directives that are executed before the parsing of the actual code is started.

Preprocessor

See *C-style preprocessor*.

Processor variant

The different chip setups that the compiler supports. See *Derivative*.

Program counter (PC)

A special processor register that is used to address instructions. Compare *Program location counter (PLC)*.

Program location counter (PLC)

Used in the IAR Assembler to denote the code address of the current instruction. The PLC is represented by a special symbol (typically `$`) that can be used in arithmetic expressions. Also called simply location counter (LC).

PROM

Programmable Read-Only Memory. A type of ROM that can be programmed only once.

Project

The user application development project.

Project options

General options that apply to an entire project, for example the target processor that the application will run on.

Q

Qualifiers

See *Type qualifiers*.

R

R-value

A value that can be found on the right side of an assignment. This is just a plain value. See also *L-value*.

Real-time operating system (RTOS)

An operating system which guarantees the latency between an interrupt being triggered and the interrupt handler starting, as well as how tasks are scheduled. An RTOS is typically much smaller than a normal desktop operating system. Compare *Real-time system*.

Real-time system

A computer system whose processes are time-sensitive. Compare *Real-time operating system (RTOS)*.

Register constant

A register constant is a value that is loaded into a dedicated processor register when the system is initialized. The compiler can then generate code that assumes that the constants are present in the dedicated registers.

Register

A small on-chip memory unit, usually just one or a few bytes in size, which is particularly efficient to access and therefore often reserved to function as a temporary storage area during program execution.

Register locking

Register locking means that the compiler can be instructed that some processor registers shall not be used during normal code generation. This is useful in a number of situations. For example, some parts of a system might be written in assembler language to gain speed. These parts might be given dedicated processor registers. Or the register might be used by an operating system, or by other third-party software.

Register variables

Typically, register variables are local variables that have been placed in registers instead of on the (stack) frame of the function. Register variables are much more efficient than other variables because they do not require memory accesses, so the compiler can use shorter/faster instructions when working with them. See also *Auto variables*.

Relocatable segments

Segments that have no fixed location in memory before linking.

Reset

A reset is a restart from the initial state of a system. A reset can originate from hardware (hard reset), or from software (soft reset). A hard reset can usually not be distinguished from the power-on condition, which a soft reset can be.

ROM-monitor

A piece of embedded software that has been designed specifically for use as a debugging tool. It resides in the ROM of the evaluation board chip and communicates with a debugger via a serial port or network connection. The ROM-monitor provides a set of primitive commands to view and modify memory locations and registers, create and remove breakpoints, and execute your application. The debugger combines these primitives to fulfill higher-level requests like program download and single-step.

Round Robin

Task scheduling in an operating system, where all tasks have the same priority level and are executed in turn, one after the other. Compare *Pre-emptive multitasking*.

RTOS

See *Real-time operating system (RTOS)*.

Runtime library

A collection of useful routines, stored as an object file, that can be linked into any application.

Runtime model attributes

A mechanism that is designed to prevent modules that are not compatible to be linked into an application. A runtime attribute is a pair constituted of a named key and its corresponding value.

Two modules can only be linked together if they have the same value for each key that they both define.

S

Saturation arithmetics

Most, if not all, C and C++ implementations use $\text{mod-}2^N$ 2-complement-based arithmetics where an overflow wraps the value in the value domain, that is, $(127 + 1) = -128$. Saturation arithmetics, on the other hand, does *not* allow wrapping in the value domain, for instance, $(127 + 1) = 127$, if 127 is the upper limit. Saturation arithmetics is often used in signal processing, where an overflow condition would have been fatal if value wrapping had been allowed.

Scheduler

The part of an RTOS that performs task-switching. It is also responsible for selecting which task that should be allowed to run. There are many different scheduling algorithms, but most of them are either based on static scheduling (performed at compile-time), or on dynamic scheduling (where the actual choice of which task to run next is taken at runtime, depending on the state of the system at the time of the task-switch). Most real-time systems use static scheduling, because it makes it possible to prove that the system will not violate the real-time requirements.

Scope

The section of an application where a function or a variable can be referenced by name. The scope of an item can be limited to file, function, or block.

Segment

A chunk of data or code that should be mapped to a physical location in memory. The segment can either be placed in RAM (read-and-writeable memory) or in ROM (read-only memory).

Segment map

A set of segments and their locations.

Semaphore

A semaphore is a type of flag that is used for guaranteeing exclusive access to resources. The resource can be a hardware port, a configuration memory, or a set of variables. If several different tasks have to access the same resource, the parts of the code (the critical sections) that access the resource have to be made exclusive for every task. This is done by obtaining the

semaphore that protects that resource, thus blocking all other tasks from it. If another task wishes to use the resource, it also has to obtain the semaphore. If the semaphore is already in use, the second task has to wait until the semaphore is released. After the semaphore is released, the second task is allowed to execute and can obtain the semaphore for its own exclusive access.

Severity level

The level of seriousness of the diagnostic response from the assembler, compiler, or debugger, when it notices that something is wrong. Typical severity levels are remarks, warnings, errors, and fatal errors. A remark just points to a possible problem, while a fatal error means that the programming tool exits without finishing.

Short addressing

Many microcontrollers have special addressing modes for efficient access to internal RAM and memory mapped I/O. Short addressing is therefore provided as an extended feature by many compilers for embedded systems. See also *Data pointers*.

Side effect

An expression in C or C++ is said to have a side-effect if it changes the state of the system. Examples are assignments to a variable, or using a variable with the post-increment operator. The C and C++ standards state that a variable that is subject to a side-effect should not be used more than once in an expression. As an example, this statement violates that rule:

```
*d++ = *d;
```

Signal

Signals provide event-based communication between tasks. A task can wait for one or more signals from other tasks. Once a task receives a signal it waits for, execution continues. A task in an RTOS that waits for a signal does not use any processing time, which allows other tasks to execute.

Simulator

A debugging tool that runs on the host and behaves as similar to the target processor as possible. A simulator is used to debug the application when the hardware is unavailable, or not needed for proper debugging. A simulator is usually not connected to any physical peripheral devices. A simulated processor is often slower, or even much slower, than the real hardware.

Single stepping

Executing one instruction or one C statement at a time in the debugger.

Skeleton code

An incomplete code framework that allows the user to specialize the code.

Special function register (SFR)

A register that is used to read and write to the hardware components of the microcontroller.

Stack frames

Data structures containing data objects as preserved registers, local variables, and other data objects that need to be stored temporary for a particular scope (usually a function).

Earlier compilers usually had a fixed size and layout on a stack frame throughout a complete function, while modern compilers might have a very dynamic layout and size that can change anywhere and anytime in a function.

Stack segments

The segment or segments that reserve space for the stack(s). Most processors use the same stack for calls and parameters, but some have separate stacks.

Statically allocated memory

This kind of memory is allocated once and for all at link-time, and remains valid all through the execution of the application. Variables that are either global or declared static are allocated this way.

Static object

An object whose memory is allocated at link-time and is created during system startup (or at first use). Compare *Dynamic object*.

Static overlay

Instead of using a dynamic allocation scheme for parameters and auto variables, the linker allocates space for parameters and auto variables at link time. This generates a worst-case scenario of stack usage, but might be preferable for small chips with expensive stack access or no stack access at all.

Structure value

A collecting names for structs and unions. A struct is a collection of data object placed sequentially in memory (possibly with pad bytes between them). A union is a collection of data sharing the same memory location.

Symbol

A name that represents a register, an absolute value, or a memory address (relative or absolute).

Symbolic location

A location that uses a symbolic name because the exact address is unknown.

T

Target

1. An architecture. 2. A piece of hardware. The particular embedded system you are developing the application for. The term is usually used to distinguish the system from the host system.

Task (thread)

A task is an execution thread in a system. Systems that contain many tasks that execute in parallel are called multitasking systems. Because a processor only executes one instruction stream at the time, most systems implement some sort of task-switch mechanism (often called context switch) so that all tasks get their share of processing time. The process of determining which task that should be allowed to run next is called scheduling. Two common scheduling methods are *Pre-emptive multitasking* and *Round Robin*.

Tentative definition

A variable that can be defined in multiple files, provided that the definition is identical and that it is an absolute variable.

Terminal I/O

A simulated terminal window in the IAR C-SPY Debugger.

Timeslice

The (longest) time an RTOS allows a task to run without running the task-scheduling algorithm. It is possible that a task will be allowed to execute during several consecutive timeslices before being switched out. It is also possible that a task will not be allowed to use its entire time slice, for example if, in a preemptive system, a higher priority task is activated by an interrupt.

Timer

A peripheral that counts independent of the program execution.

Translation unit

A source file together with all the header files and source files included via the preprocessor directive `#include`, with the exception of the lines skipped by conditional preprocessor directives such as `#if` and `#ifdef`.

Trap

A trap is an interrupt initiated by inserting a special instruction into the instruction stream. Many systems use traps to call operating system functions. Another name for trap is software interrupt.

Type qualifiers

In standard C/C++, `const` or `volatile`. IAR compilers usually add target-specific type qualifiers for memory and other type attributes.

U**UBROF (Universal Binary Relocatable Object Format)**

File format produced by the IAR Systems programming tools.

V**Virtual address (logical address)**

An address that needs to be translated by the compiler, linker or the runtime system into a physical memory address before it is used. The virtual address is the address seen by the application, which can be different from the address seen by other parts of the system.

Virtual space

An IAR Embedded Workbench Editor feature which allows you to place the insertion point outside of the area where there are actual characters.

Volatile storage

Data stored in a volatile storage device is not retained when the power to the device is turned off. In order to preserve data during a power-down cycle, you should store it in non-volatile storage. This should not be confused with the C keyword `volatile`. Compare *Non-volatile storage*.

von Neumann architecture

A computer architecture where both instructions and data are transferred over a common data channel. Compare *Harvard architecture*.

W**Watchpoints**

Watchpoints keep track of the values of C variables or expressions in the C-SPY Watch window as the application is being executed.

X**XAR options**

The set of commands that control how the IAR XAR Library Builder operates.

XLIB options

The set of commands that control how the IAR XLIB Librarian operates.

XLINK options

Parameters you can specify to change the default behavior of the IAR XLINK Linker.

Z

Zero-overhead loop

A loop in which the loop condition, including branching back to the beginning of the loop, does not take any time at all. This is usually implemented as a special hardware feature of the processor and is not available in all architectures.

Zone

Different processors have widely differing memory architectures. *Zone* is the term C-SPY uses for a named memory area. For example, on processors with separately addressable code and data memory there would be at least two zones. A processor with an intricate banked memory scheme might have several zones.

A

absolute location, definition of	387
absolute segments, definition of	387
Access Type (Breakpoints dialog box)	
data breakpoint.	172
immediate breakpoint.	174
Action (Breakpoints dialog box)	
code breakpoint	211
data breakpoint.	172
immediate breakpoint.	174
Add existing project to current workspace (Startup option).	267
Additional include directories (assembler option).	325
Additional include directories (compiler option).	317
address expression, definition of.	387
address range check, specifying in linker	339
Alias (Key bindings option)	243
Allow C-SPY-specific output file (linker option)	335
Allow directives in first column (assembler option)	323
Allow mnemonics in first column (assembler option).	323
Always generate output (linker option).	338
application	
built outside the IDE	111
definition of	387
testing	88, 151
architecture, definition of	387
argument variables	262
environment variables	234
in #include file paths	
assembler	326
compiler	317
linker.	343
summary	233
Arguments (External editor option)	248
asm (filename extension)	18
assembler	
command line version	69
documentation	22

features	11
assembler comments, text style in editor.	95
assembler directives	63
definition of	387
text style in editor	95
assembler labels, viewing	126
assembler language, definition of	387
assembler list files	
compiler call frame information, including	316
format	47
generating	325
Assembler mnemonics (compiler option)	316
assembler options	323
definition of	387
Diagnostics	327
Language	323
List.	325
Output	324
Preprocessor.	325
assembler output, including debug information	324
assembler preprocessor.	325
assembler symbols	
defining	326
using in C-SPY expressions	122
assembler variables, viewing.	126
assert, in built applications	77
assumptions, programming experience	xxxiii
Auto indent (editor option)	245
auto variables, definition of.	387
Auto window	284
context menu	284
Automatic (compiler option).	311
Autostep settings dialog box (Debug menu)	298
axx (filename extension).	18

B

-B (cspybat option)	356
--backend (cspybat option)	356

Background color (IDE Tools option)	251	definition of	388
backtrace information		immediate	173
definition of	387	example	59
generated by compiler	117	in Memory window	131
viewing in Call Stack window	288	in the simulator	170
bank switching, definition of	387	listing all	134
banked code, definition of	387	setting	
banked data, definition of	387	in memory window	131
banked memory, definition of	387	using system macros	132
bank-switching routines, definition of	387	using the dialog box	131
Base (Register filter option)	259	settings	235
bat (filename extension)	18	single-stepping if not available	109
Batch Build	87	system, description of	129
Batch Build Configuration dialog box (Project menu)	239	toggling	130
Batch Build dialog box (Project menu)	238	viewing	133
batch files		Breakpoints dialog box	
definition of	388	Code	210
specifying in Embedded Workbench IDE	74, 263	Data	171
bin (subdirectory)	15	Immediate	173
bin, common (subdirectory)	17	Log	212
bitfield, definition of	388	Breakpoints window (View menu)	209
blocks, in C-SPY macros	364	Buffered terminal output (linker option)	335
Body (b) (Configure auto indent option)	247	-build (iarbuild command line option)	89
bold style, in this guide	xxviii	Build Actions	87
bookmarks		Build Actions Configuration (Build Actions options)	331
adding	99	build configuration	
showing in editor	246	creating	78
Break (button)	117, 271	definition of	77
breakpoint condition, example	132	Build window context menu	215
breakpoint icons	130	Build window (View menu)	215
Breakpoint Usage dialog box (Simulator menu)	175	building	
using	133	commands for	87
breakpoints	117	from the command line	89
code, example	377	options	253
conditional, example	59	pre- and post-actions	87
connecting a C-SPY macro	149	the process	85
consumers	134		
data	170–171		
example	378		

- C**
- C comments, text style in editor 95
 - C compiler. *See* compiler
 - C function information, in C-SPY. 117
 - C keywords, text style in editor. 95
 - C symbols, using in C-SPY expressions 121
 - C variables, using in C-SPY expressions 121
 - c (filename extension). 18
 - call chain, displaying in C-SPY 117
 - Call stack information. 117
 - Call Stack window 288
 - context menu 288
 - example 58
 - for backtrace information. 118
 - calling convention, definition of 388
 - __cancelAllInterrupts (C-SPY system macro) 368
 - __cancelInterrupt (C-SPY system macro). 369
 - category, in Options dialog box. 86, 236
 - cfg (filename extension) 18
 - characters, in assembler macro quotes 324
 - cheap memory access, definition of 388
 - Check In Files dialog box 200
 - Check Out Files dialog box. 201
 - checksum
 - definition of 388
 - generating in linker 344
 - chm (filename extension) 18
 - clean (iarbuild command line option) 89
 - __clearBreak (C-SPY system macro) 369
 - Close Workspace (File menu). 219
 - __closeFile (C-SPY system macro) 369
 - code
 - banked, definition of 387
 - skeleton, definition of 398
 - testing 88
 - code coverage
 - commands 291
 - context menu 291
 - using 153
 - viewing 154
 - Code Coverage window 290
 - code generation
 - assembler 323
 - compiler, features. 10
 - code integrity 82
 - code memory, filling unused. 344
 - code model, definition of 388
 - Code page (compiler options). 312
 - code pointers, definition of 388
 - code templates, using in editor 97
 - Command file configuration tool (XLINK option) 342
 - command line options,
 - specifying in Embedded Workbench IDE 74, 263
 - command prompt icon, in this guide. xxxviii
 - Command (External editor option) 248
 - Common Fonts (IDE Options dialog box) 241
 - common (directory) 17
 - compiler
 - command line version 4, 69
 - documentation 11, 21
 - features 9
 - compiler call frame information
 - including in assembler list file 316
 - compiler diagnostics 316
 - suppressing 319
 - compiler function directives, definition of 389
 - compiler list files
 - assembler mnemonics, including 316
 - example 31
 - generating 316
 - source code, including 316
 - compiler options 309
 - definition of 389
 - setting in Embedded Workbench, example 29
 - Code 312
 - Diagnostics 318
 - Language 310
 - List. 316

Optimizations.	313	custom build	89
Output	314	using	90
Preprocessor.	317	custom tool configuration	89
compiler output, including debug information	315	Custom Tool Configuration (Custom Build options).	329
compiler preprocessor.	317	C++ comments, text style in editor	95
compiler symbols, defining.	318	C++ keywords, text style in editor	95
computer style, typographic convention	xxxvii	C++ tutorial	49
conditional breakpoints, example	59	C-SPY	
conditional statements, in C-SPY macros	363	debugger systems, overview.	106
Conditions (Breakpoints dialog box)		environment overview	107
code breakpoint	212	IDE reference information	269
data breakpoint	172	overview	5
Config (linker options)	342	plugin modules, loading.	110
config (subdirectory).	16	setting up	108
Configuration file (general option)	305	Simulator	159
configuration tool	342	starting the debugger	111
Configurations for project dialog box (Project menu).	234	C-SPY drivers, simulator	159
Configure Auto Indent (IDE Options dialog box).	246	C-SPY expressions	121
Configure Tools (Tools menu)	261	evaluating.	125
Configure Viewers dialog box (Tools menu).	265	in C-SPY macros	363
config, common (subdirectory).	17	Quick Watch, using	125
context menu, in windows.	124	Tooltip watch, using.	124
conventions, typographic	xxxvii	Watch window, using	124
Copy (button)	193	C-SPY macros	143, 361
copyright.	ii	blocks.	364
cost. <i>See</i> memory access cost		conditional statements	363
cpp (filename extension).	18	C-SPY expressions	363
CPU registers, definitions	110	dialog box	299
CPU variant, definition of.	390	using	146
CRC, definition of.	389	examples	144
Create New Project dialog box (Project menu).	235	checking status of register.	148
Create new project in current workspace (Startup option).	267	checking the status of WDT	148
cross-references, in map files	34	creating a log macro	149
cspybat	353	execUserSetup	55, 61
Cstartup, definition of.	389	executing	145
current position, in C-SPY Disassembly window	272	connecting to a breakpoint	149
cursor, in C-SPY Disassembly window.	272	using Quick Watch	148
\$CUR_DIR\$ (argument variable)	233	using setup macro and setup file	147
\$CUR_LINES\$ (argument variable).	233	functions	122, 361

loop statements	363
macro statements	363
setup macro file	
definition of	145
executing	147
setup macro function	
definition of	145
summary	366
system macros, summary of	367
using	143
variables	122, 362
C-SPY options	349
definition of	389
Extra Options	351
for the simulator	159
in Options dialog box	237
Plugins	351
Setup	349
C-SPYLink	8
C-style preprocessor, definition of	389
C/C++ syntax styles, options	250

D

-d (cspybat option)	357
dat (filename extension)	18
data breakpoints	170
data model, definition of	389
data pointers, definition of	389
data representation, definition of	389
dbg (filename extension)	18
dbgt (filename extension)	18
ddf (filename extension)	18
selecting device description file	110
Debug info with terminal I/O (linker option)	289
debug information	
generating in assembler	325
in compiler, generating	315
Debug information for C-SPY (linker option)	334

Debug Log window context menu	218
Debug Log window (View menu)	217
Debug menu	297
debugger concepts, definitions of	105
debugger drivers, simulator	159
debugger system overview	106
Debugger (IDE Options dialog box)	255
debugging projects	
externally built applications	111
in disassembly mode, example	38
debugging, RTOS awareness	9
declaration, definition of	389
default installation path	15
Default integer format (IDE option)	256
#define options (linker options)	337
#define statement, in compiler	318
Define symbol (linker option)	337
define (linker options)	337
Defined symbols (assembler option)	326
Defined symbols (compiler option)	318
definition, definition of	389
dep (filename extension)	19
derivative, definition of	390
description (interrupt property)	182
development environment, introduction	69
Device description file (C-SPY option)	350
device description files	16, 110
definition of	390
specifying interrupts	373
device driver, definition of	390
device selection files	16
diagnostics	
compiler	
including in list file	316
suppressing	319
linker, suppressing	339
Diagnostics (assembler options)	327
Diagnostics (compiler options)	318
Diagnostics (linker options)	338

digital signal processor, definition of	390
directories	15
assembler, ignore standard include	325
common	17
compiler, ignore standard include	317
root	15
directory structure	15
Disable language extensions (compiler option)	311
__disableInterrupts (C-SPY system macro)	370
disassembly mode debugging, example	38
Disassembly window	271
context menu	272
definition of	390
Discard Unused Publics (compiler option)	309
disclaimer	ii
DLIB library functions, reference information	94
dni (filename extension)	19
Do not show this window at startup (Startup option)	268
do (macro statement)	363
doc (subdirectory)	16
dockable windows	71
document conventions	xxxvii
documentation	15
assembler	11
compiler	11
linker	12
online	16–17
other guides	xxxvii
overview	xxxiv
product	21
this guide	xxxiii
XLIB	13
doc, common (subdirectory)	17
drag-and-drop	
of files in Workspace window	79
text in editor window	95
Driver (C-SPY option)	349
drivers (subdirectory)	16
__driverType (C-SPY system macro)	370

DSP. <i>See</i> digital signal processor	
dxx (filename extension)	18
Dynamic Data Exchange (DDE)	100
calling external editor	248
dynamic initialization, definition of	390
dynamic memory allocation, definition of	390
dynamic object, definition of	390

E

Edit Filename Extensions dialog box (Tools menu)	264
Edit Interrupt dialog box (Simulator menu)	181
Edit Memory Access dialog box	169
Edit menu	221
editing source files	93
edition, user guide	ii
editor	
code templates	97
commands	95
customizing the environment	100
external	100
features	5
indentation	96
keyboard commands	205
matching parentheses and brackets	97
options	244
shortcut to functions	99, 203
splitter controls	202
status bar, using in	97
using	93
Editor Colors and Fonts (IDE Options dialog box)	250
Editor Font (Editor colors and fonts option)	250
Editor Setup Files (IDE Options dialog box)	249
editor setup files, options	249
Editor window	202
context menu	203
tab, context menu	203
Editor (External editor option)	248
Editor (IDE Options dialog box)	244

EEC++ syntax (compiler option)	310
EEPROM, definition of	390
Embedded C++	
definition of	390
syntax, enabling in compiler	310
Embedded C++ Technical Committee	xxxvii
Embedded C++ (compiler option)	310
embedded system, definition of	390
Embedded Workbench	
editor	93
exiting from	71
layout	71
main window	70, 192
reference information	191
running	70
version number, displaying	267
Embedded Workbench Startup dialog box (Help menu)	267
emulator (C-SPY version)	
definition of	391
third-party	4
Enable graphical stack display and stack usage tracking (Stack option)	257
Enable multibyte support (assembler option)	323
Enable multibyte support (compiler option)	312
Enable remarks (compiler option)	319
Enable Virtual Space (editor option)	246
enabled transformations, in compiler	314
__enableInterrupts (C-SPY system macro)	371
Enter Location (Breakpoints dialog box)	214
enumeration, definition of	391
environment variables, as argument variables	234
EOL character (editor option)	245
EPROM, definition of	390
error messages	
compiler	320
linker	339
__evaluate (C-SPY system macro)	371
ewd (filename extension)	19
ewp (filename extension)	19
ewplugin (filename extension)	19
eww (filename extension)	19
the workspace file	71
\$EW_DIR\$ (argument variable)	233
Example applications (Startup option)	268
examples	
breakpoints	40
executing up to	41
setting	
using dialog box	59
using macro	61
calling convention, examining	45
compiling	30
C-SPY macros	144
C/C++ and assembler, mixing	46
ddf file, using	57
debugging a program	35
disassembly mode debugging	38
function calls, displaying in C-SPY	58
interrupts, using macro	61
linking	
a compiler program	33
viewing the map file	34
macros	
checking status of register	148
checking status of WDT	148
creating a log macro	149
for interrupts and breakpoints	61
using Quick Watch	148
Memory window, using	42
memory, monitoring	42
mixing C and assembler	45
performing tasks without stopping execution	132
project	
adding files	28
creating	25–26
reaching program exit	43
registers, monitoring	42
Scan for Changed Files (editor option), using	32
setting project options	29

stepping	36
Terminal I/O, displaying	43
tracing incorrect function arguments	132
using libraries	63
variables	
setting a watch point	39
watching in C-SPY	38
viewing assembler list file	47
viewing compiler list files	31
workspace, creating a new	25
examples (subdirectory)	16
exceptions, definition of	391
execUserExit (C-SPY setup macro)	366
execUserFlashExit (C-SPY setup macro)	366
execUserFlashInit (C-SPY setup macro)	366
execUserFlashReset (C-SPY setup macro)	366
execUserPreload (C-SPY setup macro)	366
execUserReset (C-SPY setup macro)	366
execUserSetup (C-SPY setup macro)	366
example	55, 61
Executable (output directory)	304
executing a program up to a breakpoint	41
execution history, tracing	126
execution time, reducing	151
\$EXE_DIR\$ (argument variable)	233
Exit (File menu)	71
exit, of user application	117
expensive memory access, definition of	391
expressions. <i>See</i> C-SPY expressions	
Extended Embedded C++ syntax, enabling in compiler ..	310
extended keywords, definition of	391
extended linker command line file. <i>See</i> linker command file	
extensions. <i>See</i> filename extensions <i>or</i> language extensions	
External Editor (IDE Options dialog box)	247
external editor, using	100
Extra Options	
for assembler	327
for compiler	320
for C-SPY	351

for linker	346
Extra Output (linker options)	336

F

factory settings	
linker	348
restoring default settings	87
features	
assembler	11
compiler	9
editor	5
librarian	13
source code control	4
file extensions. <i>See</i> filename extensions	
File menu	218
file types	
device description	16
specifying in Embedded Workbench	110
device selection	16
documentation	16
drivers	16
flash loader applications	16
header	16
include	16
library	16
linker command file templates	16
macro	109, 350
map	340
project templates	16
readme	16–17
special function registers description files	16
syntax coloring configuration	16
filename extensions	18
cfg, syntax highlighting	251
ddf, selecting device description file	110
eww, the workspace file	71
mac	
the macro file	144

- using macro file 109
 - map, linker listing 21
 - other than default 20
- Filename Extensions dialog box (Tools menu) 263
- Filename Extensions Overrides dialog box (Tools menu) . 264
- files
 - adding to a project 28
 - checking in and out 83
 - compiling, example 30
 - editing 93
 - navigating among 79
 - readme.htm 21
- \$FILE_DIR\$ (argument variable) 233
- \$FILE_FNAME\$ (argument variable) 233
- \$FILE_PATH\$ (argument variable) 233
- Fill dialog box (Memory window) 276
- Fill pattern (linker option) 344
- Fill unused code memory (linker option) 344
- Filter Files (Register filter option) 259
- Find dialog box (Edit menu) 224
- Find in Files dialog box (Edit menu) 226
- Find in Files window
 - context menu 216
- Find in Files window (View menu) 215
- Find in Trace dialog box 164
- Find in Trace window 164
- Find Next (button) 193
- Find Previous (button) 193
- Find (button) 193
- first activation time (interrupt property) 182
 - definition of 178
- Fixed width font (IDE option) 241
- flash loader applications 16
- flash memory
 - loading externally built applications to 111
- flash_loader (cspybat option) 357
- floating windows 71
- fmt (filename extension) 19
- font
 - Editor 250

- Fixed width 241
- Proportional width 241
- for (macro statement) 363
- Forced Interrupt window (Simulator menu) 183
- format specifiers, definition of 391
- Format (linker option) 334
- formats
 - assembler list file 47
 - compiler list file 31
 - C-SPY input 8
 - linker output
 - default, overriding 335–336
 - specifying 334
- function calls, displaying in C-SPY 58
- function level profiling 151
- Function Trace (C-SPY window) 162
- function trace, definition of 160
- functions
 - C-SPY running to when starting 109, 350
 - intrinsic, definition of 392
 - shortcut to in editor windows 99, 203

G

- general options 303
 - definition of 391
 - specifying, example 29
- Library Configuration 305
- Library Options 306
- Output 303
- Stack/Heap options 307
- Target 303
- Generate browse information (IDE Project options) 254
- Generate checksum (linker option) 344
- Generate debug info (assembler option) 325
- Generate debug information (compiler option) 315
- Generate extra output file (linker option) 336
- Generate linker listing (linker option) 340
- generating extra output file 335

generic pointers, definition of	391
glossary.	387
Go to Bookmark (button)	193
Go to function (editor button)	99, 203
Go To (button)	193
Go (button)	271
Go (Debug menu)	116
Group members (Register filter option)	259
Groups (Register filter option)	259
groups, definition of	77

H

h (filename extension).	19
Harvard architecture, definition of	391
header files	16
quick access to	99
heap memory, definition of	391
heap size, definition of	392
Help menu	267
helpfiles (filename extension).	19
highlighting, in C-SPY	116
hold time (interrupt property)	182
definition of	178
host, definition of	392

I

i (filename extension)	19
IAR Assembler Reference Guide	22
IAR Compiler Reference Guide	21
IAR Linker and Library Tools Reference Guide	22
IAR Systems web site.	22
iarbuild, building from the command line	89
iarchive options.	356
IarIdePm.exe.	70
icons in this guide	xxviii
IDE.	3–4
definition of	392

if else (macro statement).	363
if (macro statement)	363
Ignore standard include directories (assembler option).	325
Ignore standard include directories (compiler option).	317
illegal memory accesses, checking for	166
immediate breakpoints	173
inc (filename extension)	19
inc (subdirectory)	16
Include compiler call frame	
information (compiler option).	316
include files.	16
assembler, specifying path	325
compiler, specifying path.	317
definition of	392
linker, specifying path	343
Include source (compiler option)	316
Include suppressed entries (linker option).	341
Incremental Search dialog box (Edit menu)	227
Indent Size (editor option)	244
indentation, in editor	96
information, product	21
inherited settings, overriding.	86
ini (filename extension)	19
inline assembler, definition of.	392
inlining, definition of	392
input	
redirecting to Terminal I/O window	289
special characters in Terminal I/O window	289
input formats, C-SPY	8
Input Mode dialog box	290
insertion point, shortcut key for moving	95
installation path, default	15
installed files.	15
documentation	16–17
executable	17
include	16
library	16
instruction mnemonics, definition of.	392
Integrated Development Environment (IDE).	3–4
definition of	392

- Intel-extended, C-SPY input format 8, 107
- Internet, IAR Systems web site 22
- Interrupt Log window (Simulator menu) 185
- Interrupt Setup dialog box (Simulator menu) 180
- interrupt system, using device description file 180
- interrupt vector table, definition of 392
- interrupt vector, definition of 392
- interrupts
 - adapting C-SPY system for target hardware 180
 - definition of 392
 - nested, definition of 394
 - options 182
 - simulated, definition of 177
 - timer, example 186
 - using system macros 184
- intrinsic functions, definition of 392
- intrinsic, definition of 392
- ISO/ANSI C, compiler adhering to 311
- italic style, in this guide xxxvii–xxxviii
- ixx (filename extension) 19

K

- Key bindings (IDE Options dialog box) 242
- key bindings, definition of 392
- key summary, editor 205
- keywords, definition of 392

L

- Label (c) (Configure auto indent option) 247
- labels (assembler), viewing 126
- Language conformance (compiler option) 311
- language extensions
 - definition of 393
 - disabling in compiler 311
- language facilities, in compiler 10
- Language (assembler options) 323
- Language (compiler options) 310

- Language (IDE Options dialog box) 243
- Language (Language option) 243
- layout, of Embedded Workbench 71
- lib (subdirectory) 16
- librarian
 - documentation 22
 - features 13
 - options, definition of 399
 - overview 12
- librarian. *See* XLIB
- library
 - creating a project for 64
 - definition of 396
 - runtime 11
- library builder
 - documentation 22
 - overview 12
 - using for building libraries 63
- library builder options
 - definition of 399
 - Output 347
- Library Configuration (general options) 305
- Library file (general option) 305
- library files 12, 16
- library functions
 - configurable 17
 - reference information 94
- library modules
 - example 63
 - specifying in compiler 315
 - using 63
- Library Options (general options) 306
- Library (general option) 305
- lightbulb icon, in this guide xxxviii
- #line directives, generating
 - in assembler 326
 - in compiler 318
- Lines/page (linker option) 341

linker	
command line version	69
diagnostics, suppressing	339
documentation	22
overriding default output	335–336
overview	11
linker command file	
definition of	393
path, specifying	343
specifying in linker	342
specifying in XLINK	342
templates	16
Linker command file configuration tool	342
Linker command file (linker option)	342
linker list files	
generating	340
including segment map	340
specifying lines per page	341
linker options	333
definition of	400
factory settings	348
Config	342
define	337
Diagnostics	338
Extra Options	346
Extra Output	336
List	340
Output	333
Processing	344
With I/O emulation modules	334
linker symbols, defining	337
linking, example	33
list files	
assembler	47
compiler runtime information, including	316
compiler	
assembler mnemonics, including	316
example	31
generating	316
source code, including	316
linker	
generating	340
including segment map	340
specifying lines per page	341
option for specifying destination	304
List (assembler options)	325
List (compiler options)	316
List (linker options)	340
\$LIST_DIR\$ (argument variable)	233
Live Watch window	284
context menu	285
Live watch (IDE option)	256
local variables. <i>See</i> auto variables	
Locals window	283
context menu	284
location counter, definition of	395
-log (iarbuild command line option)	89
Log File dialog box (Debug menu)	300
log (filename extension)	19
logical address, definition of	399
loop statements, in C-SPY macros	363
lst (filename extension)	19
L-value, definition of	393

M

mac (filename extension)	19
the macro file	144
using a macro file	109
--macro (cspybat option)	357–358
Macro Configuration dialog box (Debug menu)	299
macro files, specifying	109, 350
Macro quote characters (assembler option)	324
macro statements	363
macros	
definition of	393
executing	145
system	361

- using 143
- MAC, definition of 393
- mailbox (RTOS), definition of 393
- main function, C-SPY running to when starting 109, 350
- main.sxx (assembler tutorial file) 63
- make (iarbuild command line option) 89
- Make before debugging (IDE Project options) 253
- managing projects 4
- map files 340
 - example 34
 - viewing 34
- map (filename extension) 19
 - linker listing 21
- maxmin.sxx (assembler tutorial file) 63
- memory
 - filling unused 344
 - monitoring 138
 - example 42
- memory access checking 166, 168
- memory access cost, definition of 394
- Memory Access Setup dialog box (Simulator menu) . . . 166
- memory accesses, illegal 166
- memory area, definition of 394
- memory bank, definition of 394
- memory map 166
 - definition of 394
- memory model, definition of 394
- Memory Restore dialog box 278
- Memory Save dialog box 277
- memory usage, summary of 341
- Memory window 273
 - context menu 275
 - using 138
- memory zones 137
- menu bar 192
 - C-SPY-specific 270
- menu (filename extension) 19
- Menu (Key bindings option) 242

- menus 218
 - specific to C-SPY 296
- Messages window, amount of output 251
- Messages (IDE Options dialog box) 251
- metadata (subdirectory) 18
- microcontroller, definition of 394
- microprocessor, definition of 394
- migration, from earlier IAR compilers 312
- module map, in map files 34
- Module summary (linker option) 341
- Module type (compiler option) 315
- MODULE (assembler directive) 63
- modules
 - definition of 394
 - including local symbols in input 335
- Module-local symbols (linker option) 335
- Motorola, C-SPY input format 8, 107
- Multiply and accumulate, definition of 393
- multitasking, definition of 395

N

- Navigate Backward (button) 193
- NDEBUG, preprocessor symbol 77
- nested interrupts, definition of 394
- New Configuration dialog box (Project menu) 235
- New Document (button) 193
- New Group (Register filter option) 259
- Next Statement (button) 271
- No global type checking (linker option) 338
- non-banked memory, definition of 394
- non-initialized memory, definition of 394
- non-volatile storage, definition of 394
- NOP, definition of 394

O

- object files, specifying output directory 304
- \$OBJ_DIR\$ (argument variable) 233

online documentation	
available from Help menu	267
common, in directory	17
target-specific, in directory	16
online help	22
Open existing workspace (Startup option)	267
Open Workspace (File menu)	219
__openFile (C-SPY system macro)	372
Opening Brace (a) (Configure auto indent option)	247
operator precedence, definition of	394
operators, definition of	394
optimization levels	313
Optimizations page (compiler options)	313
Optimizations (compiler option)	313
optimizations, effects on variables	123
options	
typographic convention	xxxvii
assembler	323
compiler	309
Custom Build	331
custom build	329
C-SPY	349
editor	244
general	303
general, specifying	29
iarchive	356
library builder	347
linker	333
setup files for editor	249
Options dialog box (Project menu)	236
using	86
__orderInterrupt (C-SPY system macro)	373
output	
assembler	
including debug information	324
preprocessor, generating	326
compiler	
including debug information	315
preprocessor, generating	318

formats	334
debug (ubrof)	334
from C-SPY, redirecting to a file	111
generating extra file	335
linker	
generating	338
specifying filename	333
specifying filename on extra output	336
Output assembler file (compiler option)	316
Output file (linker option)	333
Output format (linker option)	335–336
Output list file (compiler option)	316
Output (assembler option)	324
Output (compiler options)	314
Output (general options)	303
Output (library builder options)	347
Output (linker options)	333

P

-p (driver option)	358
par (filename extension)	19
parameters, typographic convention	xxxvii
parentheses and brackets, matching (in editor)	97
part number, of user guide	ii
Paste (button)	193
paths	
assembler include files	325
compiler include files	317
linker include files	343
relative, in Embedded Workbench	79, 205
source files	205
pbd (filename extension)	20
pbi (filename extension)	20
peripheral units, definitions	110
peripherals, definition of	395
pew (filename extension)	20
pipeline, definition of	395
Plain 'char' is (compiler option)	311

- Play a sound after build operations (IDE Project options). 254
- plugin modules (C-SPY). 8
 - loading. 110
- Plugins (C-SPY options). 351
- plugins (subdirectory). 17
- plugins, common (subdirectory). 18
- pointers, definition of 395
- __popSimulatorInterruptExecutingStack (C-SPY system macro). 373
- powerpac (subdirectory). 17
- #pragma directive, definition of 395
- precedence, definition of. 394
- preemptive multitasking, definition of 395
- Preinclude file (compiler option) 318
- preprocessor
 - definition of. *See* C-style preprocessor
- preprocessor directives
 - definition of 395
 - text style in editor 95
- Preprocessor output to file (assembler option) 326
- Preprocessor output to file (compiler option) 318
- Preprocessor (assembler option) 325
- preprocessor (compiler options) 317
- prerequisites, programming experience. xxxiii
- Press shortcut key (Key bindings option) 242
- Primary (Key bindings option) 242
- Printf formatter (general option) 306
- prj (filename extension) 20
- probability (interrupt property). 183
 - definition of 178
- Processing options (linker options). 344
- processor variant, definition of 395
- product overview
 - assembler 11
 - compiler. 9
 - C-SPY Debugger 5
 - directory structure 15
 - documentation 21
 - file types 18
 - IAR Embedded Workbench IDE 3
 - librarian 12
 - library builder 12
 - linker 11
 - profiling information. 151
 - Profiling window 292
 - using 151
 - program counter, definition of. 395
 - program execution, in C-SPY 113
 - program location counter, definition of. 395
 - programming experience. xxxiii
 - Project Make, options 253
 - Project menu. 231
 - project model 75
 - project options, definition of. 395
 - Project page (IDE Options dialog box). 253
 - projects
 - adding files to 78, 231
 - example. 28
 - build configuration, creating 78
 - building 87
 - in batches 87
 - compiling, example 30
 - creating 26, 78
 - example. 64
 - definition of 76, 395
 - excluding groups and files 78
 - files
 - checking in and out 83
 - moving 78
 - for debugging externally built applications 111
 - groups, creating 78
 - managing 4, 75
 - organization 75
 - removing items 78
 - setting options 85
 - source code control 82
 - testing 88
 - version control systems 82
 - workspace, creating 78

\$PROJ_DIR\$ (argument variable)	233
\$PROJ_FNAME\$ (argument variable)	233
\$PROJ_PATH\$ (argument variable)	233
PROM, definition of	395
Proportional width font (IDE option)	241
PUBLIC (assembler directive)	63

Q

qualifiers, definition of. <i>See</i> type qualifiers	
Quick Search text box.	193
Quick Watch window	285
executing C-SPY macros	148
using	125

R

Range checks (linker option)	339
Raw binary image (linker option)	343
__readFile (C-SPY system macro)	374
__readFileByte (C-SPY system macro)	374
reading guidelines.	xxxiii
readme files.	16–17
readme.htm	21
__readMemoryByte (C-SPY system macro).	375
__readMemory16 (C-SPY system macro)	375
__readMemory32 (C-SPY system macro)	376
__readMemory8 (C-SPY system macro)	375
real-time operating system, definition of.	396
real-time system, definition of	396
Recent workspace (Startup option)	268
Redo (button)	193
reference information	
C-SPY IDE	269
guides.	21
IAR Embedded Workbench	191
typographic convention	xxxviii
register constant, definition of.	396
Register Filter (IDE Options dialog box)	259

register groups	140
application-specific, defining.	141
predefined, enabling.	140
register locking, definition of	396
register variables, definition of	396
Register window	281
example	42
using	140
registered trademarks	ii
__registerMacroFile (C-SPY system macro).	376
registers, definition of.	396
relative paths.	79, 205
Relaxed ISO/ANSI (compiler option).	311
release notes	17
Reload last workspace at startup (IDE Project options) . .	254
relocatable segments, definition of	396
remarks, compiler diagnostics.	319
Remove trailing blanks (editor option)	246
repeat interval (interrupt property)	182
definition of	178
Replace dialog box (Edit menu)	225
Replace (button)	193
Require prototypes (compiler option)	311
Reset All (Key bindings option)	243
Reset (button)	271
Reset (Debug menu), example	44
__resetFile (C-SPY system macro).	376
reset, definition of.	396
restoring default factory settings.	87
return (macro statement).	364
ROM-monitor, definition of	107, 396
root directory	15
Round Robin, definition of.	396
RTOS awareness debugging	9
RTOS awareness (C-SPY plugin module).	110
RTOS, definition of.	396
Run to Cursor (button)	271
Run to Cursor, description	116
Run to (C-SPY option)	109, 350

runtime libraries 11
 definition of 396
 runtime model attributes
 definition of 396
 in map files 34
 rxx (filename extension) 20
 R-value, definition of 395

S

saturation arithmetics, definition of 397
 Save All (button) 193
 Save All (File menu) 220
 Save As (File menu) 220
 Save editor windows before building (IDE Project options) 253
 Save workspace and projects before building (IDE Project options) 253
 Save Workspace (File menu) 219
 Save (button) 193
 Save (File menu) 220
 Scan for Changed Files (editor option) 246
 using 32
 Scanf formatter (general option) 306
 SCC. *See* source code control systems
 scheduler (RTOS), definition of 397
 scope, definition of 397
 scrolling, shortcut key for 95
 Search paths (linker option) 343
 searching in editor windows 99
 Segment map (linker option) 340
 segment map, definition of 397
 Segment overlap warnings (linker option) 338
 segment parts, including all in list file. 341
 segments
 definition of 397
 overlap errors, reducing 338
 range checks, controlling 339
 section in map files 34
 Select SCC Provider dialog box (Project menu) 199
 Select Statics dialog box (Statics window) 287
 selecting text, shortcut key for 95
 semaphores, definition of 397
 Service (External editor option) 248
 Set Log file dialog box (Debug menu) 298
 __setCodeBreak (C-SPY system macro) 377
 __setDataBreak (C-SPY system macro) 378
 __setSimBreak (C-SPY system macro) 379
 settings (directory) 20
 Setup macros (C-SPY option) 350
 setup macros, in C-SPY. *See* C-SPY macros
 Setup (C-SPY options) 349
 severity level, definition of 397
 SFR
 definition of 398
 header files 16
 sfr (filename extension) 20
 short addressing, definition of 397
 shortcut keys 95
 Show Bookmarks (editor option) 246
 Show Line Number (editor option) 245
 Show right margin (editor option) 245
 side-effect, definition of 397
 signals, definition of 397
 --silent (cspybat option) 359
 simulating interrupts, enabling/disabling 181
 simulator
 definition of 398
 features 9
 Simulator menu 160
 size optimization 313
 Size (Breakpoints dialog) 172, 211
 sizeof 121
 skeleton code, definition of 398
 Source Browser window 207
 context menu 208
 using 81

source code	
including in compiler list file	316
templates	97
Source code color in Disassembly window (IDE option)	256
Source Code Control context menu	197
source code control systems	82
Source Code Control (IDE Options dialog box)	254
source code control, features	4
source file paths	79, 205
source files	
adding to a project	28
editing	93
managing in projects	77
__sourcePosition (C-SPY system macro)	380
special function registers (SFR)	
definition of	398
description files	16
header files	16
using as assembler symbols	122
speed optimization	313
src (subdirectory)	17
src, common (subdirectory)	18
stack frames, definition of	398
stack segments, definition of	398
Stack window	293
using	138
Stack (IDE Options dialog box)	257
Stack/Heap (general options)	307
static objects, definition of	398
Static overlay map (linker option)	341
static overlay, definition of	398
statically allocated memory, definition of	398
Statics window	285
context menu	286
status bar	194
stdin and stdout	
redirecting to C-SPY window	118
redirecting to file	118
Step Into	271
description	115
example of	38
Step into functions (IDE option)	256
Step Out	271
description	115
Step Over	271
description	115
step points, definition of	114
stepping	114
definition of	398
example	36
STL container expansion (IDE option)	256
Stop build operation on (IDE Project options)	253
Stop Debugging (button)	271
__strFind (C-SPY system macro)	380
Strict ISO/ANSI (compiler option)	311
strings, text style in editor	95
structure value, definition of	398
__subString (C-SPY system macro)	381
support, technical	22
Suppress all warnings (linker option)	339
Suppress download (C-SPY option)	159
Suppress these diagnostics (compiler option)	319
Suppress these diagnostics (linker option)	339
sxx (filename extension)	20
symbolic location, definition of	398
Symbolic Memory window	279
context menu	280
toolbar	279
symbols	
<i>See also</i> user symbols	
defining in assembler	326
defining in compiler	318
defining in linker	337
definition of	398
in input modules	335
using in C-SPY expressions	121

syntax coloring	
configuration files	16
in editor	95
Syntax Coloring (Editor colors and fonts option)	250
Syntax Highlighting (editor option)	245
syntax highlighting, in editor window	96
system macros	361

T

Tab Key Function (editor option)	244
Tab Size (editor option)	244
Target options, specifying	303
target system, definition of	106
Target (general options)	303
target, definition of	398
\$TARGET_BNAME\$ (argument variable)	233
\$TARGET_BPATH\$ (argument variable)	233
\$TARGET_DIR\$ (argument variable)	233
\$TARGET_FNAME\$ (argument variable)	233
\$TARGET_PATH\$ (argument variable)	233
task, definition of	398
tcl (filename extension)	20
technical support	22
Template dialog box (Edit menu)	228
tentative definition, definition of	399
Terminal IO Log File	118
terminal I/O	
definition of	399
simulating	334
Terminal I/O Log File dialog box (Debug menu)	301
Terminal I/O window	118, 289
example of using	43
Terminal I/O (IDE Options dialog box)	260
terminology	387
testing, of code	88
thread, definition of	398
timer, definition of	399
timeslice, definition of	399
Toggle Bookmark (button)	193
Toggle Breakpoint (button)	193
toggle breakpoint, example	40, 60
__toLower (C-SPY system macro)	381
tool chain	
extending	89
specifying	26
Tool Output window	216
context menu	217
toolbar	
debug	270
IDE	193
Trace	162
\$TOOLKIT_DIR\$ (argument variable)	233
tools icon, in this guide	xxviii
Tools menu	240
tools, user-configured	261
__toString (C-SPY system macro)	382
touch, open-source command line utility	88
__toUpper (C-SPY system macro)	382
Trace Expressions window	163
Trace window	161
toolbar	162
trace, definition of	125
trademarks	ii
transformations, enabled in compiler	314
translation unit, definition of	399
trap, definition of	399
Treat all warnings as errors (compiler option)	320
Treat these as errors (compiler option)	320
Treat these as errors (linker option)	339
Treat these as remarks (compiler option)	319
Treat these as warnings (compiler option)	320
Treat these as warnings (linker option)	339
tutor (subdirectory)	17
type qualifiers, definition of	399
Type (External editor option)	248
type-checking	10, 12
disabling at link time	338

typographic conventionsxxxvii

U

UBROF.8, 11
 definition of399
Undo (button)193
Universal Binary Relocatable Object Format. *See* UBROF
Use Code Templates (editor option)249
Use Custom Keyword File (editor option)249
Use External Editor (External editor option).248
Use register filter (Register filter option)259
user application, definition of106
User symbols are case sensitive (assembler option)323

V

variables
 auto387
 effects of optimizations123
 information, limitation on123
 using in arguments.262
 using in C-SPY expressions121
 watching in C-SPY124
 example.38
variance (interrupt property)182
 definition of178
version control systems.82
version number, of Embedded Workbench267
View menu229
virtual address, definition of399
virtual space, definition of399
visualSTATE
 plugin modules for.8
volatile storage, definition of399
von Neumann architecture, definition of399
vsp (filename extension)20

W

Warn when exceeding stack threshold (Stack option) . . .258
Warn when stack pointer is out of bounds (Stack option) .258
warnings
 compiler.320
 linker339
Warnings/Errors (linker option)339
Watch window281
 context menu282
 using124
watchpoints
 definition of399
 setting38
web sites, recommendedxxxvii
web site, IAR Systems22
When source resolves to multiple function instances . . .255
while (macro statement)363
Window menu.266
windows191
 organizing on the screen71
 specific to C-SPY.269
With I/O emulation modules (linker option)334
 using118
With runtime control modules (linker option).334
Workspace window.194
 context menu196, 209
 drag-and-drop of files79
 example27
workspaces
 creating26, 78
 using78
__writeFile (C-SPY system macro)383
__writeFileByte (C-SPY system macro).383
__writeMemoryByte (C-SPY system macro)383
__writeMemory16 (C-SPY system macro)384
__writeMemory32 (C-SPY system macro)385
__writeMemory8 (C-SPY system macro)384
wsdt (filename extension)20

www.iar.com 22

X

XAR *See* library builder

xcl (filename extension) 20

xlB (filename extension) 20

XLIB *See* librarian

XLINK *See* linker

Z

zero-overhead loop, definition of 400

zone

 definition of 400

 in C-SPY 137

Symbols

#define options (linker options) 337

#define statement, in compiler 318

#line directives, generating in assembler 326

#line directives, generating in compiler 318

#pragma directive, definition of 395

\$CUR_DIR\$ (argument variable) 233

\$CUR_LINES\$ (argument variable) 233

\$EW_DIR\$ (argument variable) 233

\$EXE_DIR\$ (argument variable) 233

\$FILE_DIR\$ (argument variable) 233

\$FILE_FNAME\$ (argument variable) 233

\$FILE_PATH\$ (argument variable) 233

\$LIST_DIR\$ (argument variable) 233

\$OBJ_DIR\$ (argument variable) 233

\$PROJ_DIR\$ (argument variable) 233

\$PROJ_FNAME\$ (argument variable) 233

\$PROJ_PATH\$ (argument variable) 233

\$TARGET_BNAME\$ (argument variable) 233

\$TARGET_BPATH\$ (argument variable) 233

\$TARGET_DIR\$ (argument variable) 233

\$TARGET_FNAME\$ (argument variable) 233

\$TARGET_PATH\$ (argument variable) 233

\$TOOLKIT_DIR\$ (argument variable) 233

% stack usage threshold (Stack option) 257

-B (cspybat option) 356

-d (cspybat option) 357

-p (driver option) 358

--backend (cspybat option) 356

--flash_loader (cspybat option) 357

--macro (cspybat option) 357–358

--silent (cspybat option) 359

__cancelAllInterrupts (C-SPY system macro) 368

__cancelInterrupt (C-SPY system macro) 369

__clearBreak (C-SPY system macro) 369

__closeFile (C-SPY system macro) 369

__disableInterrupts (C-SPY system macro) 370

__driverType (C-SPY system macro) 370

__enableInterrupts (C-SPY system macro) 371

__evaluate (C-SPY system macro) 371

__fmessage (C-SPY macro statement) 364

__message (C-SPY macro statement) 364

__openFile (C-SPY system macro) 372

__orderInterrupt (C-SPY system macro) 373

__popSimulatorInterruptExecutingStack (C-SPY

system macro) 373

__readFile (C-SPY system macro) 374

__readFileByte (C-SPY system macro) 374

__readMemoryByte (C-SPY system macro) 375

__readMemory16 (C-SPY system macro) 375

__readMemory32 (C-SPY system macro) 376

__readMemory8 (C-SPY system macro) 375

__registerMacroFile (C-SPY system macro) 376

__resetFile (C-SPY system macro) 376

__setCodeBreak (C-SPY system macro) 377

__setDataBreak (C-SPY system macro) 378

__setSimBreak (C-SPY system macro) 379

__smessage (C-SPY macro statement) 364

__sourcePosition (C-SPY system macro) 380

__strFind (C-SPY system macro) 380

__subString (C-SPY system macro) 381

__toLower (C-SPY system macro)	381
__toString (C-SPY system macro)	382
__toUpper (C-SPY system macro)	382
__writeFile (C-SPY system macro)	383
__writeFileByte (C-SPY system macro)	383
__writeMemoryByte (C-SPY system macro)	383
__writeMemory16 (C-SPY system macro)	384
__writeMemory32 (C-SPY system macro)	385
__writeMemory8 (C-SPY system macro)	384