

Data sheet acquired from Harris Semiconductor SCHS082C - Revised October 2003

CMOS 8-Bit Priority Encoder

High-Voltage Types (20-Volt Rating)

■ CD4532B consists of combinational logic that encodes the highest priority input (D7-D0) to a 3-bit binary code. The eight inputs, D7 through D0, each have an assigned priority; D7 is the highest priority and D0 is the lowest. The priority encoder is inhibited when the chip-enable input Ei is low. When E₁ is high, the binary representation of the highest-priority input appears on output lines Q2-Q0, and the group select line GS is high to indicate that priority inputs are present. The enable-out (E_O) is high when no priority inputs are present. If any one input is high, EO is low and all cascaded lower-order stages are disabled.

The CD4532B types are supplied in 16-lead hermetic dual-in-line ceramic packages (F3A suffix), 16-lead dual-in-line plastic packages (E suffix), 16-lead small-outline packages (M, M96, MT, and NSR suffixes), and 16-lead thin shrink small-outline packages (PW and PWR suffixes).

Features:


- Converts from 1 of 8 to binary
- Provides cascading feature to handle any number of inputs
- Group select indicates one or more priority inputs
- Standardized, symmetrical output characteristics
- 100% tested for quiescent current at 20 V
- Maximum input current of 1 µA at 18 V over full package temperature range; 100 nA at 18 V and 25°C
- Noise margin (full-package-temperature range):

0.5 V at V_{DD} = 5 V 1.5 V at V_{DD} = 10 V 1.5 V at V_{DD} = 15 V

- 5-V, 10-V, and 15-V parametric ratings
- Meets all requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices"

Applications:

- Priority encoder
- Binary or BCD encoder (keyboard encoding)
- Floating point arithmetic



CD4532B Types


RECOMMENDED OPERATING CONDITIONS

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges.

Characteristic	Min.	Max	Units
Supply Voltage Range (for T _A =	3	18	V
Full Package Temp. Range)			

MAXIMUM RATINGS, Absolute-Maximum Values:

DC SUPPLY-VOLTAGE RANGE, (VDD) INPUT VOLTAGE RANGE, ALL INPUTS-0.5V to VDD +0.5V POWER DISSIPATION PER PACKAGE (PD): For T_A = +100°C to +125°C Derate Linearity at 12mW/°C to 200mW DEVICE DISSIPATION PER OUTPUT TRANSISTOR FOR TA = FULL PACKAGE-TEMPERATURE RANGE (All Package Types)........... 100mW OPERATING-TEMPERATURE RANGE (TA)-55°C to +125°C STORAGE TEMPERATURE RANGE (Tstg)-65°C to +150°C LEAD TEMPERATURE (DURING SOLDERING):






Fig. 1 — Typical output low (sink) current




Fig. 2 - Minimum output low (sink) current characteristics.




Fig. 3 — Typical output high (source) current characteristics.

Copyright © 2003, Texas Instruments Incorporated

STATIC ELECTRICAL CHARACTERISTICS

CHARACTER-	CONE	ıs	LIMITS AT INDICATED TEMPERATURES (°C)							UNITS		
ISTIC	Vo	VIN	VDD						+25		0,4113	
	(V)	(V)	(V)	-55	-4 0	+85	+125	Min.	Тур.	Max.		
Quiescent Device		0,5	5	5	5	150	150	-	0.04	5		
Current,		0,10	10	10	10	300	300	-	0.04	10	μА	
IDD Max.	_	0,15	15	20	20	600	600	-	0.04	20	μ	
		0,20	20	100	100	3000	3000	_	0.08	100		
Output Low	0.4	0,5	5	0.64	0.61	0.42	0.36	0.51	1	-		
(Sink) Current	0.5	0,10	10	1.6	1.5	1.1	0.9	1.3	2.6		* *	
IOL Min.	1.5	0,15	15	4.2	4	2.8	2.4	3.4	6.8	_		
Output High	4.6	0,5	5	-0.64	-0.61	-0.42	-0.36	-0.51	-1	_	mA	
(Source)	2.5	0,5	5	-2	-1.8	-1.3	-1.15	-1.6	-3.2	-		
Current, IOH Min.	9.5	0,10	10	-1.6	-1.5	-1.1	-0.9	-1.3	-2.6	- -		
TOH WATER	13.5	0,15	15	-4.2	-4	-2.8	-2.4	-3.4	-6.8			
Output Voltage:	_	0,5	5		0	.05		_	0	0.05		
Low-Level, VOL Max.	-	0,10	10		0	.05			0	0.05		
VUL Max.	-	0,15	15		0	.05		-	0	0.05	l v	
Output Voltage:		0,5	5		4	.95		4.95	5	-	ľ	
High-Level,	. –	0,10	10		9	95		9.95	10			
VOH Min.	_	0,15	15		14	1.95		14.95	15			
Input Low	0.5, 4.5	1	5			1		-		1.5		
Voltage, VIL Max.*	1, 9	-	10		2	.5		-		3		
VIL Max.	1.5,13.5	_	15			3		_		4	v	
Input High Voltage,	0.5, 4.5	_	5			4		3.5			ľ	
	1, 9	-	10		7	.5		7				
VIH Min.	1.5,13.5	_	15		1	2		11	_	_		
Input Current IIN Max.		0,18	18	±0.1	±0.1	±1	±1	_	±10 ⁻⁵	±0.1	μΑ	

^{*}One input is tested at a time; other inputs should be at V_{DD} or V_{SS} . For testing all inputs at V_{IL} and V_{IH} levels, use 20%/80% V_{DD} .

DYNAMIC ELECTRICAL CHARACTERISTICS at T_A=25°C; C_L=50 pF, Input t_r,t_f= 20 ns, R_L=200 K Ω

CHARACTERISTIC	TEST CONDITIONS VDD	LIF	UNITS		
	VOLTS	TYP. MAX.			
Propagation Delay Time tpHL, tpLH	5	110	220		
E _I to E _O , E _I to GS	10	55	110	1	
	15	45	85	1	
	5	170	340	1	
Et to Qm, Dn to GS	10	85	170	ns	
	15	65	125	1	
	5	220	440		
Dn to Q _M	10	110	220		
	15	85	160	[
	5	100	200		
Transition Time tTHL, tTLH	10	50	100	ns	
	15	40	80		
Input Capacitance CIN	Any Input	5	7.5	pF	




Fig. 4 — Minimum output high (source) current characteristics.




Fig. 5 — Typical propagation delay (Dn to Qm) vs. supply voltage.




Fig. 6 — Typical propagation delay (E₁ to GS, E₁ to E_O) vs. load capacitance.




Fig. 7 — Typical propagation delay (Dn to Qm) vs. load capacitance.

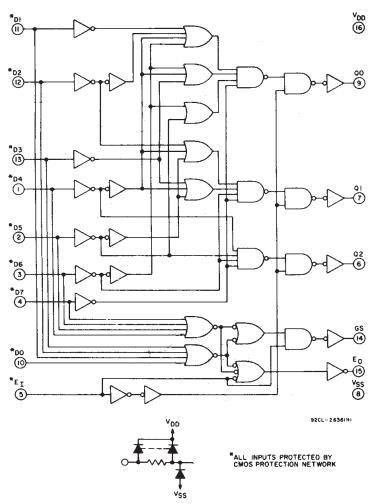


Fig. 8 — CD4532 logic diagram.

TRUTH TABLE

	Input									Output			
ΕĮ	D7	D6	D5	D4	D3	D2	D1	D0	GS	Q2	Q1	Q0	Eo
0	Х	Х	Х	Х	Х	X.	Х	X	Ō	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	1
1	1	Χ.	х	Х	Х	Х	×	Х	1	1	1	1	0
1	0	1	Х	х	х	Х	X	Х	1	1	1	0	0
1	0	0	1	Х	×	Х	×	х	1	1	0	1	0
1	0	0	0	1	×	Х	x	Х	1	1	0	0	0
1	0	0	0	0	1	Х	Х	Х	1	0	1	1	0
1	0	0	0	0	0	1	×	х	1	0	1	0	0
1	0	0	0	0	0	0	1	х	1	0	0	1	0
1	0	0	0	0	0	0	0	1	1	0	0	0	0

X = Don't Care Logic 1 \equiv High Logic 0 \equiv Low




Fig.9 – Typical transition time vs. load capacitance.




Fig. 10 — Typical dynamic power dissipation vs. fraquency.




Fig.11 — Dynamic power dissipation test circuit.




Fig. 12 - Quiescent device current test circuit.

CD4532B Types




Fig. 13 - Input voltage test circuit.





Fig. 14 - Input current test circuit.



Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils (10^{-3}) inch).

Dimensions and pad layout for CD4532BH.





Fig. 15 - 16-level priority encoder.



TRUTH TABLE

ſ	Input										Output				
ſ	D9	D8	D7	D6	D 5	D4	D3	D2	D1	DO	GS	σ3.	Q2'	01'	GO,
ſ	1	х	х	х	х	Х	х	х	Х	х	0	1	0	0	1
ı	0	1	x	X	Х	Х	X	Х	Х	X	0	1	0	0	0
ľ	0	0	1	х	Х	Х	Х	Х	X	X	1-	0	1	1	1
1	0	0	0	1 -	x	х	X	X.	X	х	1	0	1	1	0.,
1	0	0	0	0	1	X	X	X	Х	Х	1	0	1	0	1
ı	0	0	0	0	0	_1_	X	X	Х	Х	1 1	0	1	0	0
I	0	0	0	0	0	0	1	Х	Х	Х	1	0.	0	1	1
ł	0	0	0	0	0	0	0	1	Х	х	1	- 0	0	1	0
١	0	0	0	0	0	0	0	0	1	х	1	0	0	0	1
ı	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0
	X = Don't Care Logic 1 ≡ High						Logic 0 ≡ Low								

Fig.16 - 0-to-9 keyboard encoder.





i.com 28-Feb-2005

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
CD4532BE	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	Level-NC-NC-NC
CD4532BF3A	ACTIVE	CDIP	J	16	1	None	Call TI	Level-NC-NC-NC
CD4532BM	ACTIVE	SOIC	D	16	40	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
CD4532BM96	ACTIVE	SOIC	D	16	2500	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
CD4532BMT	ACTIVE	SOIC	D	16	250	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
CD4532BNSR	ACTIVE	SO	NS	16	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
CD4532BPW	ACTIVE	TSSOP	PW	16	90	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
CD4532BPWR	ACTIVE	TSSOP	PW	16	2000	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - May not be currently available - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

None: Not yet available Lead (Pb-Free).

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDECindustry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN




- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



D (R-PDSO-G16)

PLASTIC SMALL-OUTLINE PACKAGE

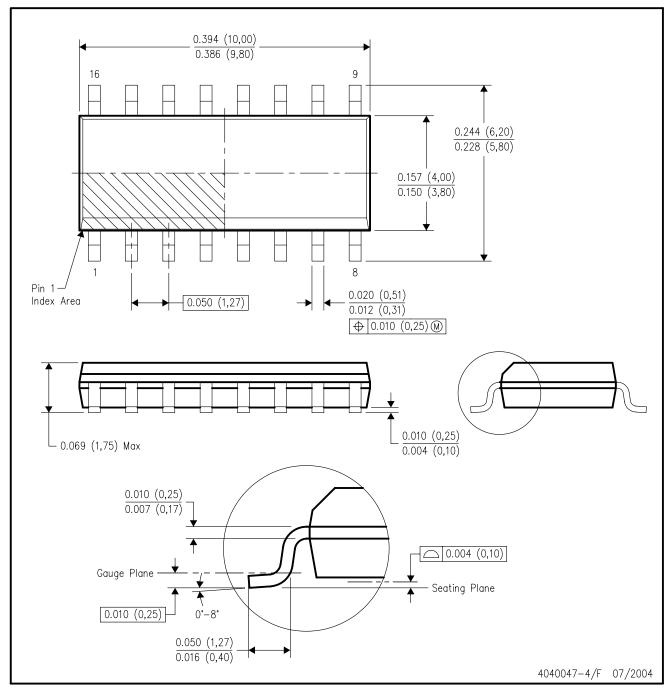

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-012 variation AC.



MECHANICAL DATA

NS (R-PDSO-G**)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



PW (R-PDSO-G**)

14 PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated