CNIEE 172

SLLS144E - OCTOBER 1980 - REVISED APRIL 2000


IDACKACE

- Meet or Exceed the Requirements of TIA/EIA-422-B, TIA/EIA-423-B, and TIA/EIA-485-A and ITU Recommendations V.10, V.11, X.26, and X.27
- Designed for Multipoint Bus Transmission on Long Bus Lines in Noisy Environments
- 3-State Outputs
- Common-Mode Input Voltage Range of -12 V to 12 V
- Input Sensitivity ... ±200 mV
- Input Hysteresis . . . 50 mV Typ
- High Input Impedance . . . 12 kΩ Min
- Operate From Single 5-V Supply
- Low Power Requirements
- Pin-to-Pin Replacement for AM26LS32

#### description

The SN55173, SN65173, and SN75173 are monolithic quadruple differential line receivers with 3-state outputs. They are designed to meet requirements of TIA/EIA-422-B, the TIA/EIA-423-B, TIA/EIA-485-A, and several ITU recommendations. The standards are for balanced multipoint bus transmission at rates up to 10 megabits per second. The four receivers share two OR enable inputs, one active when high, the other active when low. These devices feature high input impedance, input hysteresis for increased noise immunity, and input sensitivity of ±200 mV over a common-mode input voltage range of –12 V to 12 V. Fail-safe design specifies that if the inputs are open circuited, the outputs are always high. The SN65173 and SN75173 are designed for optimum performance when used with the SN75172 or SN75174 quad differential line drivers.

SN55173J PACKAGE													
SN65173, SN75173 D OR N PACKAGE													
(TOP VIEW)													
L	$- \mathbf{\nabla}$												
1B 🛛	1	16	V <sub>CC</sub>										
1A [	2	15	4B										
1Y [	3	14	4A										
G [	4	13	4Y										
2Y [	5	12	G										
2A [	6	11	3Y										
2B 🛛	7	10	ЗA										
GND 🛛	8	9	3B										
l													



NC-No internal connection

#### THE SN55173 IS NOT RECOMMENDED FOR NEW DESIGNS.

The SN55173 is characterized over the full military temperature range of  $-55^{\circ}$ C to  $125^{\circ}$ C. The SN65173 is characterized for operation from  $-40^{\circ}$ C to  $85^{\circ}$ C. The SN75173 is characterized for operation from  $0^{\circ}$ C to  $70^{\circ}$ C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



Copyright © 2000, Texas Instruments Incorporated

SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

	AVAILABLE OPTIONS												
PACKAGED DEVICES													
TA	PLASTIC SMALL OUTLINE (D)	SMALL OUTLINE CHIP CARRIER CERAMIC DIP PLASTIC DI											
0°C to 70°C	SN75173D	—	—	SN75173N									
-40°C to 85°C	SN65173D	_	—	SN65173N									
–55°C to 125°C	— SN55173FK SN55173J —												


The D package is available taped and reeled. Add the suffix R to the device type (e.g., SN75173DR).

**FUNCTION TABLE** 

(each receiver)										
DIFFERENTIAL	ENA	BLES	OUTPUT							
A–B	G	G	Y							
	Н	Х	Н							
$V_{ID} \ge 0.2 V$	Х	L	Н							
	Н	Х	?							
$-0.2 \text{ V} < \text{V}_{\text{ID}} < 0.2 \text{ V}$	Х	L	?							
	Н	Х	L							
$V_{ID} \leq -0.2 V$	Х	L	L							
Х	L	Н	Z							
Open circuit	Х	L	Н							
	Н	Х	Н							

H = high level, L = low level, ? = indeterminate, X = irrelevant, Z = high impedance (off)

## logic symbol †




 $\dagger$  This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, J, and N packages.




SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

### logic diagram (positive logic)



Pin numbers shown are for the D, J, and N packages.

#### schematics of inputs and outputs

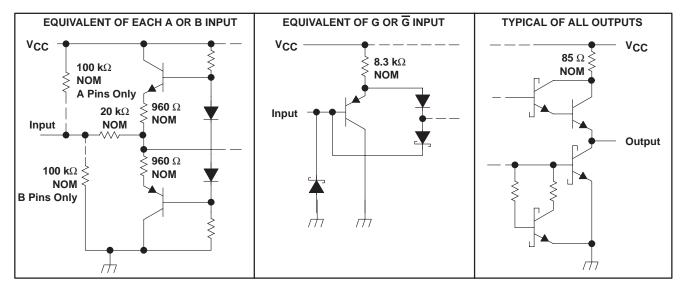



#### SLLS144E – OCTOBER 1980 – REVISED APRIL 2000

bsolute maximum ratings over operating free-air temperature range (unless otherwise noted) <sup>†</sup>
Supply voltage, V <sub>CC</sub> (see Note 1)
Input voltage (V <sub>I</sub> or B inputs)
Differential input voltage, V <sub>ID</sub> (see Note 2) ±25 V
Enable input voltage, V <sub>I</sub>
Low-level output current, I <sub>OL</sub>
Package thermal impedance, θ <sub>JA</sub> (see Note 3): D package
N package
Continuous total dissipation
Case temperature for 60 seconds, T <sub>C</sub> : FK package
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or N package
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package
Storage temperature range, T <sub>stg</sub> 65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential input voltage, are with respect to network ground terminal.

- 2. Differential input voltage is measured at the noninverting input with respect to the corresponding inverting input.
- 3. The package thermal impedance is calculated in accordance with JESD 51.

#### DISSIPATION RATING TABLE

PACKAGE	T <sub>A</sub> ≤ 25°C POWER RATING	DERATING FACTOR	T <sub>A</sub> = 70°C POWER RATING	T <sub>A</sub> = 125°C POWER RATING
FK	1375 mW	11 mW/°C	880 mW	275 mW
J	1375 mW	11 mW/°C	880 mW	275 mW

### recommended operating conditions

		MIN	NOM	MAX	UNIT
	SN55173			5.5	V
Supply voltage, V <sub>CC</sub>	SN65173, SN75173	4.75	5	5.25	V
Common-mode input voltage, VIC				±12	V
Differential input voltage, VID				±12	V
High-level enable-input voltage, VIH		2			V
Low-level enable-input voltage, VIL				0.8	V
High-level output current, I <sub>OH</sub>				-400	μΑ
Low-level output current, IOL				16	mA
	SN55173	-55		125	
Operating free-air temperature, TA	SN65173	-40		85	°C
	SN75173	0		70	



SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

#### electrical characteristics over recommended ranges of common-mode input voltage, supply voltage, and operating free-air temperature

	PARAMETER	TES	T CONDITIONS		MIN	TYP <sup>†</sup>	MAX	UNIT
$V_{IT+}$	Positive-going input threshold voltage	V <sub>O</sub> = 2.7 V,	$I_{O} = -0.4 \text{ mA}$				0.2	V
V <sub>IT</sub> –	Negative-going input threshold voltage	$V_{O} = 0.5 V,$	l <sub>O</sub> = 16 mA		-0.2‡			V
V <sub>hys</sub>	Hysteresis (V <sub>IT+</sub> – V <sub>IT</sub> _)	See Figure 4				50		mV
VIK	Enable-input clamp voltage	lj = – 18 mA					-1.5	V
				SN55173	2.5			V
∨он	High-level output voltage	V <sub>ID</sub> = 200 mV,	I <sub>OH</sub> = -400 μA	SN65173, SN75173	2.7			V
\/		)/ 000 m)/	Cas Figure 4	I <sub>OL</sub> = 8 mA			0.45	V
VOL	Low-level output voltage	$v_{\text{ID}} = -200 \text{ mv},$	$V_{\text{ID}} = -200 \text{ mV}$ , See Figure 1 $I_{\text{OL}} = 10$				0.5	v
I <sub>OZ</sub>	High-impedance-state output current	$V_{O} = 0.4 \text{ V to } 2.4 \text{ V}$					±20	μΑ
1.		Other input at 0.1/	See Note 3	V <sub>I</sub> = 12 V			1	mA
1	Line input current	Other input at 0 V,	See Note S	$V_{I} = -7 V$			-0.8	ША
IIH	High-level enable-input current	V <sub>IH</sub> = 2.7 V					20	μΑ
Ι <sub>ΙL</sub>	Low-level enable-input current	V <sub>IL</sub> = 0.4 V					-100	μΑ
ri	Input resistance				12			kΩ
los	Short-circuit output current				-15		-85	mA
ICC	Supply current	Outputs disabled					70	mA

<sup>†</sup> All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C. <sup>‡</sup> The algebraic convention, in which the less positive (more negative) limit is designated as minimum, is used in this data sheet for threshold voltage levels only.

NOTE 3: Refer to TIA/EIA-422-B and TIA/EIA-423-B for exact conditions.


### switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = $25^{\circ}$ C

	PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
tPLH	Propagation delay time, low-to-high-level output	V <sub>ID</sub> = -1.5 V	$V_{ID} = -1.5 \text{ V to } 1.5 \text{ V},$		20	35	ns
<sup>t</sup> PHL	Propagation delay time, high-to-low-level output	C <sub>L</sub> = 15 pF,	See Figure 1		22	35	ns
<sup>t</sup> PZH	Output enable time to high level	C <sub>L</sub> = 15 pF,	See Figure 2		17	22	ns
tPZL	Output enable time to low level	C <sub>L</sub> = 15 pF,	See Figure 3		20	25	ns
<sup>t</sup> PHZ	Output disable time from high level	C <sub>L</sub> = 5 pF,	See Figure 2		21	30	ns
t <sub>PLZ</sub>	Output disable time from low level	C <sub>L</sub> = 5 pF,	See Figure 3		30	40	ns




SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

### PARAMETER MEASUREMENT INFORMATION

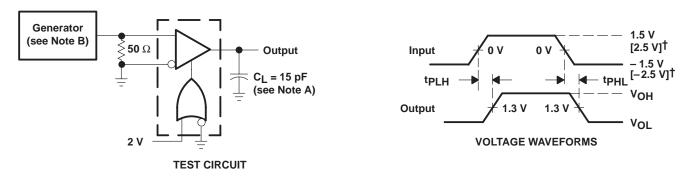

<sup>†</sup> Voltage for the SN55173 only.

- NOTES: A. CL includes probe and jig capacitance.
  - B. The input pulse is supplied by a generator having the following characteristics: PRR = 1 MHz, duty cycle = 50%,  $t_f \le 6$  ns,  $t_f \le 6$  ns,  $Z_O = 50 \Omega$ .

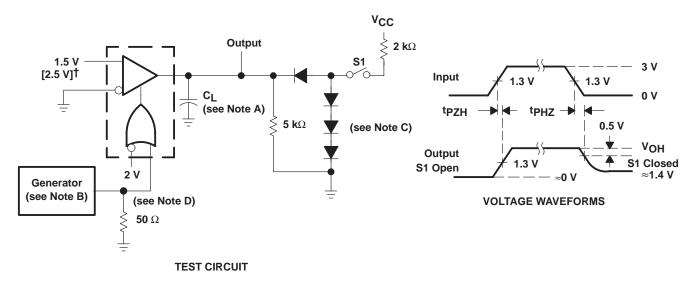

#### Figure 1. tPLH, tPHL Test Circuit and Voltage Waveforms


<sup>†</sup> Voltage for the SN55173 only.

- NOTES: A. CL includes probe and jig capacitance.
  - B. The input pulse is supplied by a generator having the following characteristics: PRR = 1 MHz, duty cycle = 50%,  $t_{f} \le 6$  ns,  $t_{f} \le 6$  ns,  $t_{f} \le 6$  ns,  $t_{f} \le 6$  ns,  $t_{f} \le 6$  ns, the following characteristics: PRR = 1 MHz, duty cycle = 50%,  $t_{f} \le 6$  ns, the following characteristics: PRR = 1 MHz, duty cycle = 50%, the following characteristics: PRR = 1 MHz, duty cycle = 50%, the following characteristics: PRR = 1 MHz, duty cycle = 50%, the following characteristics: PRR = 1 MHz, duty cycle = 50\%, the following characteristics: PRR =
  - C. All diodes are 1N916, or equivalent.
  - D. To test the active-low enable  $\overline{G}$ , ground G and apply an inverted input waveform to  $\overline{G}$ .

#### Figure 2. t<sub>PHZ</sub>, t<sub>PZH</sub> Test Circuit and Voltage Waveforms



SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

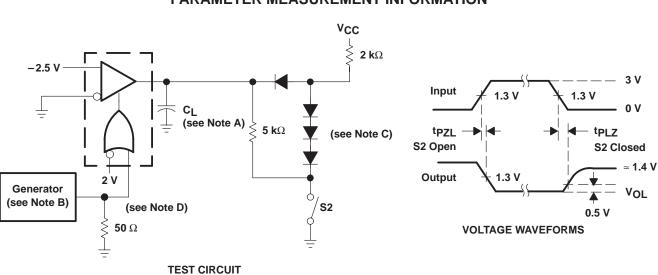


PARAMETER MEASUREMENT INFORMATION

- NOTES: A. CL includes probe and jig capacitance.
  - B. The input pulse is supplied by a generator having the following characteristics: PRR = 1 MHz, duty cycle = 50%,  $t_f \le 6$  ns,  $t_f \le 6$  ns,  $Z_O = 50 \Omega$ .
  - C. All diodes are 1N916, or equivalent.
  - D. To test the active-low enable  $\overline{G}$ , ground G and apply an inverted input waveform to  $\overline{G}$ .


Figure 3. t<sub>PZL</sub>, t<sub>PLZ</sub> Test Circuit and Voltage Waveforms



SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

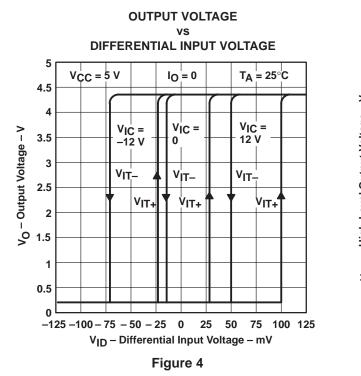




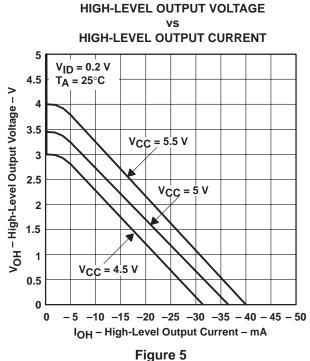

<sup>†</sup>Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.



SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

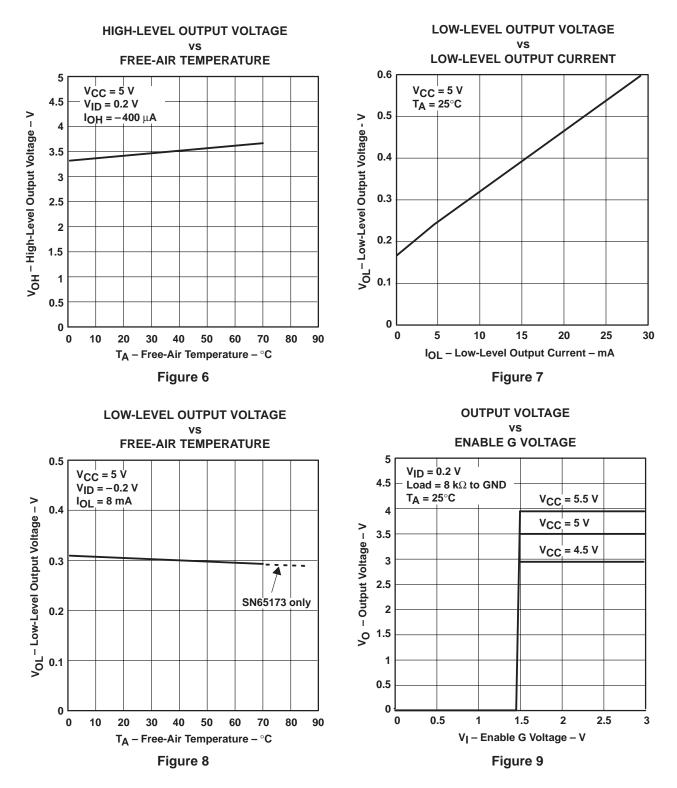


### **TYPICAL CHARACTERISTICS<sup>†</sup>**

<sup>†</sup> Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.




SLLS144E - OCTOBER 1980 - REVISED APRIL 2000

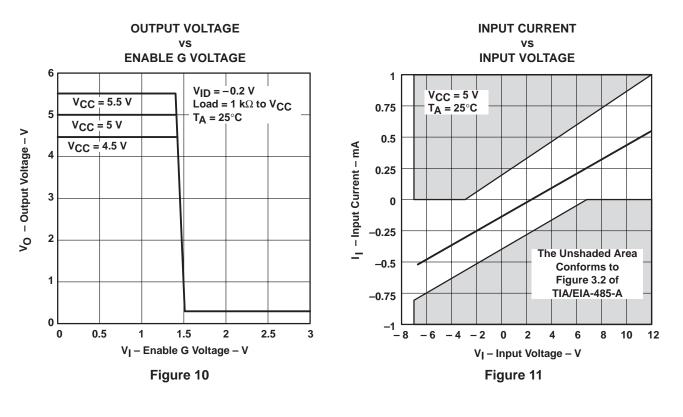

### **TYPICAL CHARACTERISTICS**



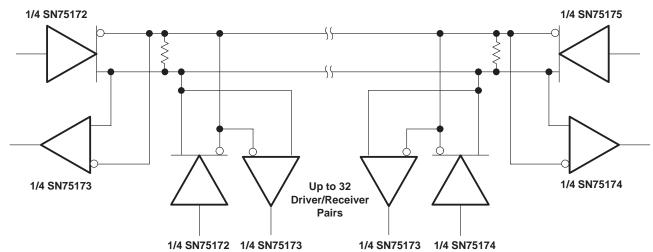

NOTE A: The line should be terminated at both ends in its characteristic impedance. Stub lengths off the main line should be kept as short as possible.

Figure 12. Typical Application Circuit



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
Low Power Wireless	www.ti.com/lpw	Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2007, Texas Instruments Incorporated

4-Jun-2007

### **PACKAGING INFORMATION**

JMENTS

www ti com

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN55173J	ACTIVE	CDIP	J	16	1	TBD	A42 SNPB	N / A for Pkg Type
SN65173D	OBSOLETE	SOIC	D	16		TBD	Call TI	Call TI
SN65173DR	OBSOLETE	SOIC	D	16		TBD	Call TI	Call TI
SN65173N	OBSOLETE	PDIP	Ν	16		TBD	Call TI	Call TI
SN75173D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173DE4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173DRE4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173DRG4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173J	OBSOLETE	CDIP	J	16		TBD	Call TI	Call TI
SN75173N	ACTIVE	PDIP	Ν	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN75173NE4	ACTIVE	PDIP	Ν	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN75173NSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173NSRE4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN75173NSRG4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SNJ55173FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
SNJ55173J	ACTIVE	CDIP	J	16	1	TBD	A42 SNPB	N / A for Pkg Type

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.




**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

### TAPE AND REEL BOX INFORMATION



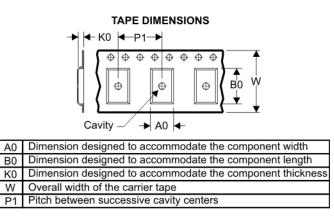

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




Device	Package	Pins	Site	Reel Diameter (mm)	Reel Width (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN75173DR	D	16	SITE 27	330	16	6.5	10.3	2.1	8	16	Q1
SN75173NSR	NS	16	SITE 41	330	16	8.2	10.5	2.5	12	16	Q1



# PACKAGE MATERIALS INFORMATION

22-Sep-2007

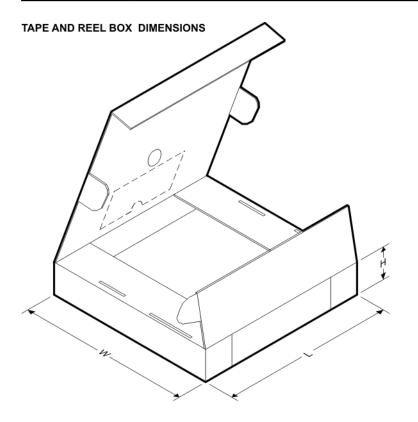

Device	Package	Pins	Site	Length (mm)	Width (mm)	Height (mm)
SN75173DR	D	16	SITE 27	342.9	336.6	0.0
SN75173NSR	NS	16	SITE 41	346.0	346.0	0.0

J (R-GDIP-T\*\*) 14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

MLCC006B - OCTOBER 1996

### FK (S-CQCC-N\*\*)

#### LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. The terminals are gold plated.
- E. Falls within JEDEC MS-004



# N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- $\triangle$  The 20 pin end lead shoulder width is a vendor option, either half or full width.



D (R-PDSO-G16)

PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.

Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.

E. Reference JEDEC MS-012 variation AC.



### MECHANICAL DATA

### PLASTIC SMALL-OUTLINE PACKAGE

#### 0,51 0,35 ⊕0,25⊛ 1,27 8 14 0,15 NOM 5,60 8,20 5,00 7,40 $\bigcirc$ Gage Plane ₽ 0,25 7 1 1,05 0,55 0°-10° Δ 0,15 0,05 Seating Plane — 2,00 MAX 0,10PINS \*\* 14 16 20 24 DIM 10,50 10,50 12,90 15,30 A MAX A MIN 9,90 9,90 12,30 14,70 4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.

NS (R-PDSO-G\*\*)

**14-PINS SHOWN** 

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Telephony	www.ti.com/telephony
Low Power Wireless	www.ti.com/lpw	Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2007, Texas Instruments Incorporated